




harn[®] *moving innovations* ▶

BASIC drawer runner

product
assembly
installation

Basic

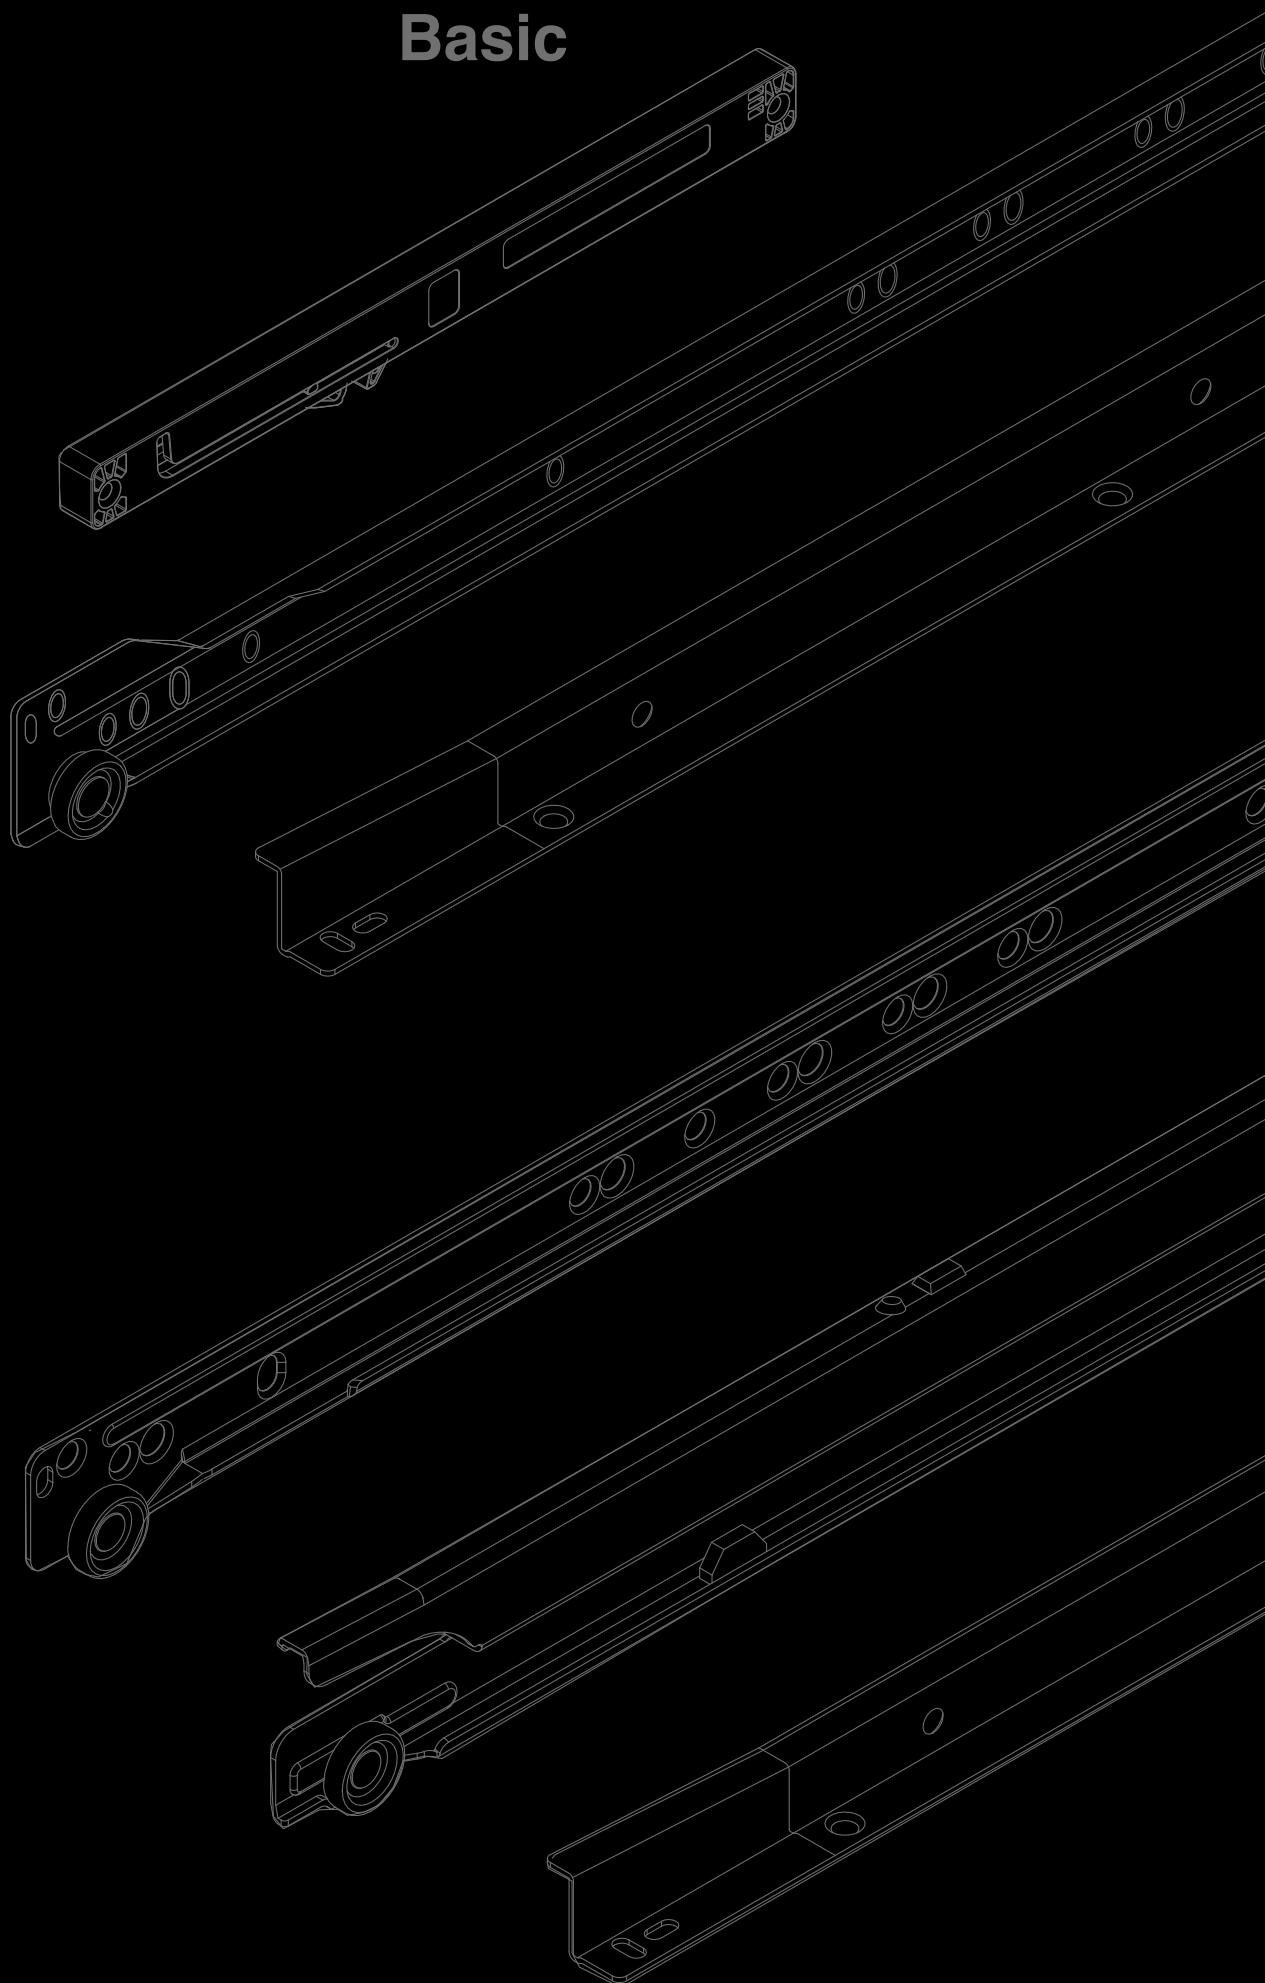

2030 Drawer Runner
Single Extension



3011 Drawer Runner
Full Extension



Accessories

8

Assembly and Insertion

9

BASIC


BASIC


2030 Drawer Runners - Single Extension

BASIC



- Single extension
- Bottom mounted drawer profiles
- Epoxy coated
- Load capacity of 30kg
- Self closing feature
- Smooth rolling mechanism
- Double out-stop safety feature
- Locked-in position when fully extended

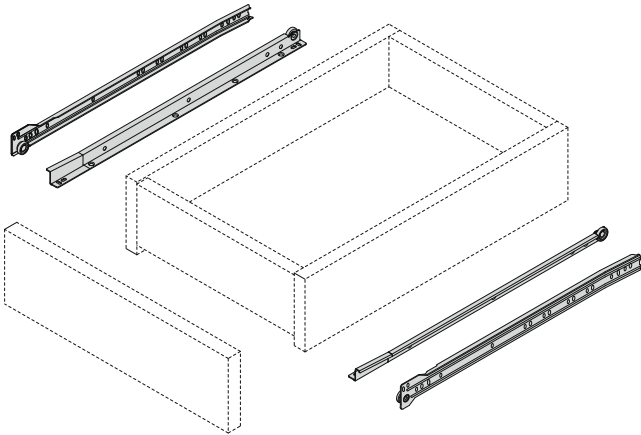


1 	Basic Drawer Runners Left / Right :
Runner Length	
250mm	2030.25.XX
270mm	2030.27.XX
300mm	2030.30.XX
350mm	2030.35.XX
400mm	2030.40.XX
450mm	2030.45.XX
500mm	2030.50.XX
550mm	2030.55.XX
600mm	2030.60.XX
650mm	2030.65.XX
700mm	2030.70.XX

Colour Code XX

Standard : 01 – R9010 White

Available upon Request : 21-R7004 Grey 12-R9005 Black 11-R8017 Brown

Space Requirements and Installation Dimensions

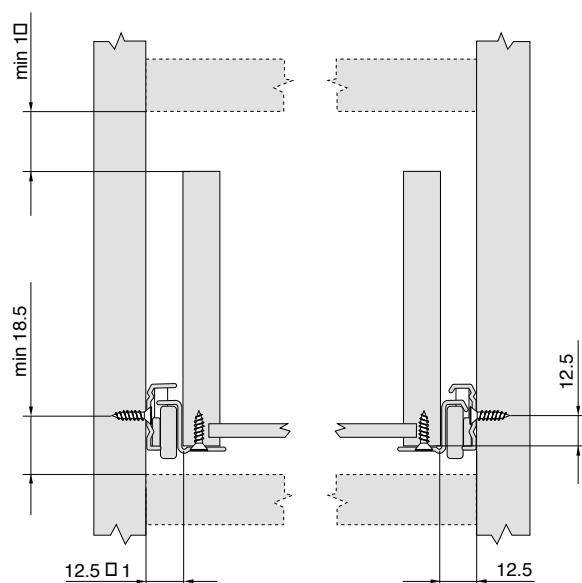

Cabinet Profile Screw Positions

Drawer Dimensions

Runner Length

□ in. internal cabinet depth □ Runner length □ 3 mm

250mm

200mm

300mm

350mm

400mm

450mm


500mm

550mm


600mm

650mm

□00mm

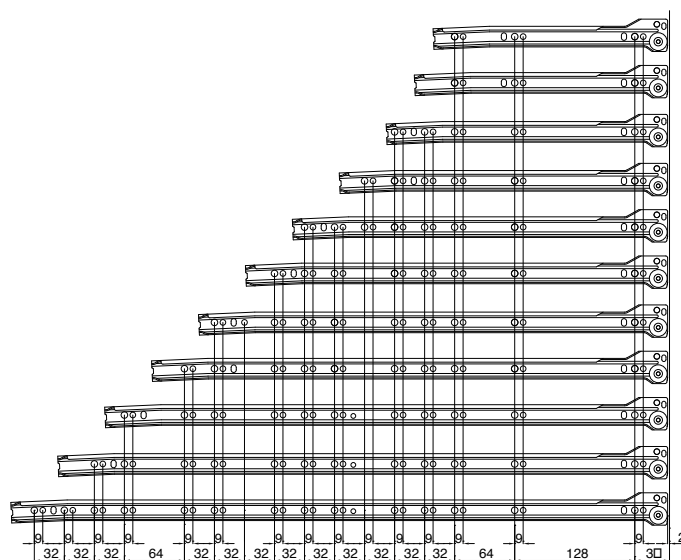


Drawer width □ internal cabinet width □25mm



Drawer length □ runner length

Drilling pattern for cabinet member





BASIC

3011 Drawer Runners - Full Extension

BASIC



- Full extension
- Bottom mounted drawer profiles
- Epoxy coated
- Load capacity of 40kg
- Self closing feature
- Smooth rolling mechanism
- Double out-stop safety feature
- Locked-in position when fully extended

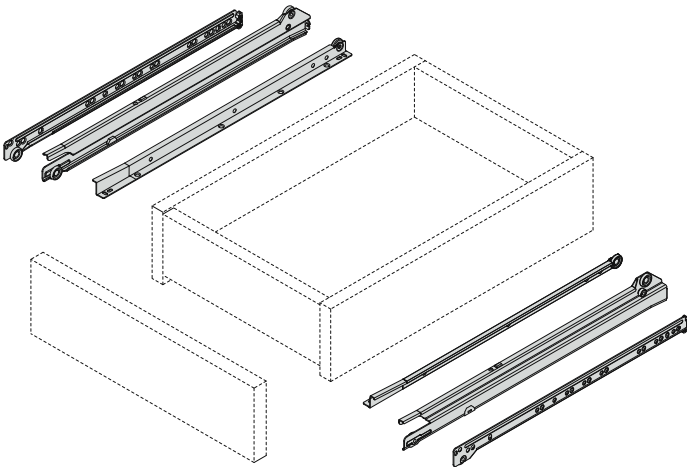


Basic Drawer Runners
Left / Right :

Runner Length	
350mm	3011.35.XX
400mm	3011.40.XX
450mm	3011.45.XX
500mm	3011.50.XX
550mm	3011.55.XX

Colour Code XX
Standard : 01 – R9010 White
Available upon Request : 21-R7004 Grey 12-R9005 Black 11-R8017 Brown

Space Requirements and Installation Dimensions

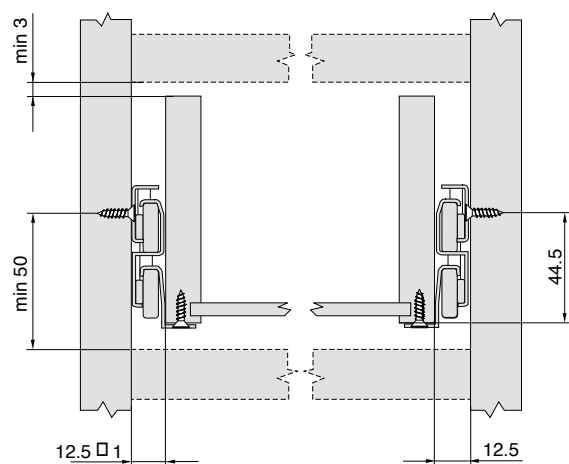

Cabinet Profile Screw Positions

Runner Length

350mm


400mm

450mm

500mm


550mm

□ in. internal cabinet depth □ Runner length □ 8 mm

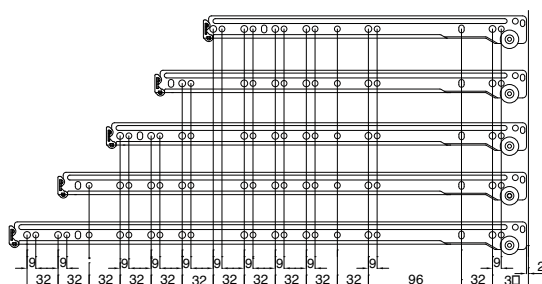


Drawer Dimensions

Drawer width □ internal cabinet width □ 25mm



Drawer length □ runner length


Drilling pattern for cabinet member





Basic Sylent

Article No.

RSC.2510

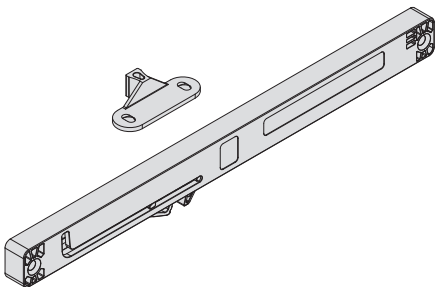

Application

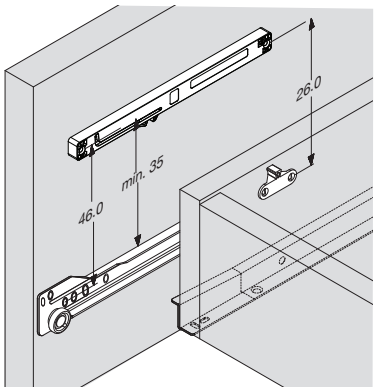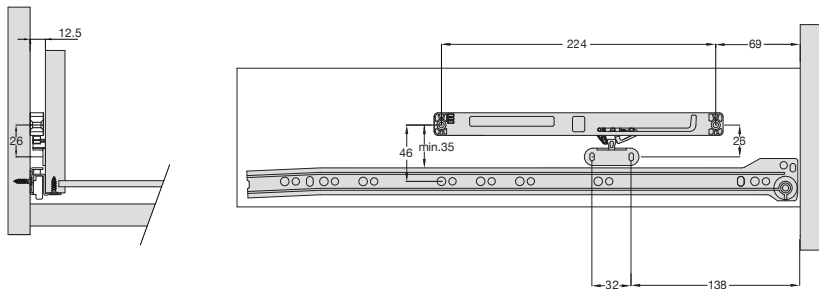


Note :

1. Drawers using only one RSC.2510 must install it on the right side of the cabinet.
2. Drawer widths 800mm and above requires a RSC.2510 to be installed on each side of the cabinet.
3. All measurements are quoted in milimeter.


BASIC

Assembly and Insertion


Drawer Assembly - Single Extension

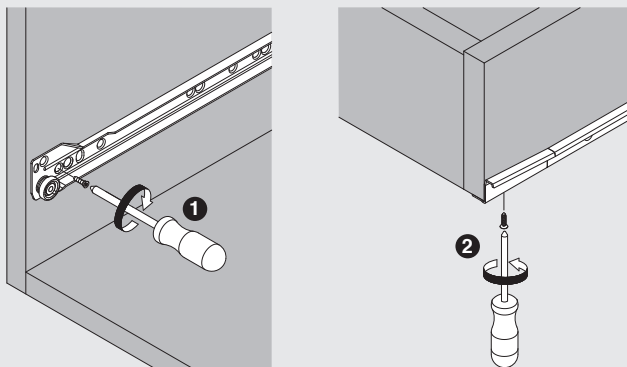


Drawer Insertion - Single Extension

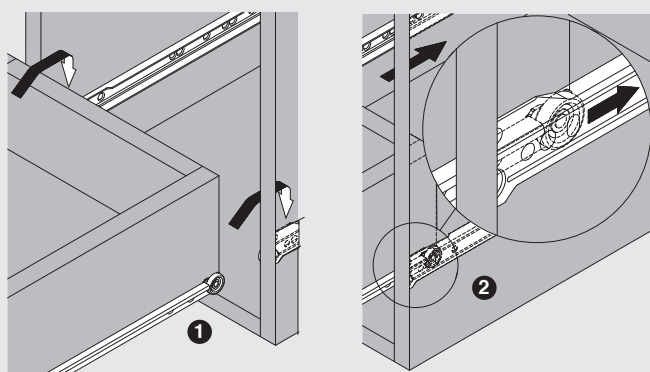

Drawer Assembly - Full Extension

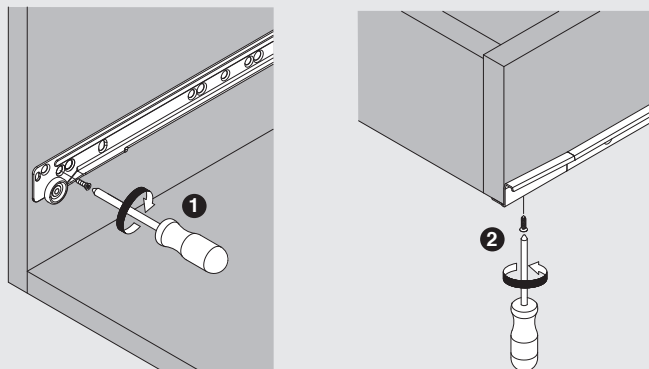

Drawer Insertion - Full Extension

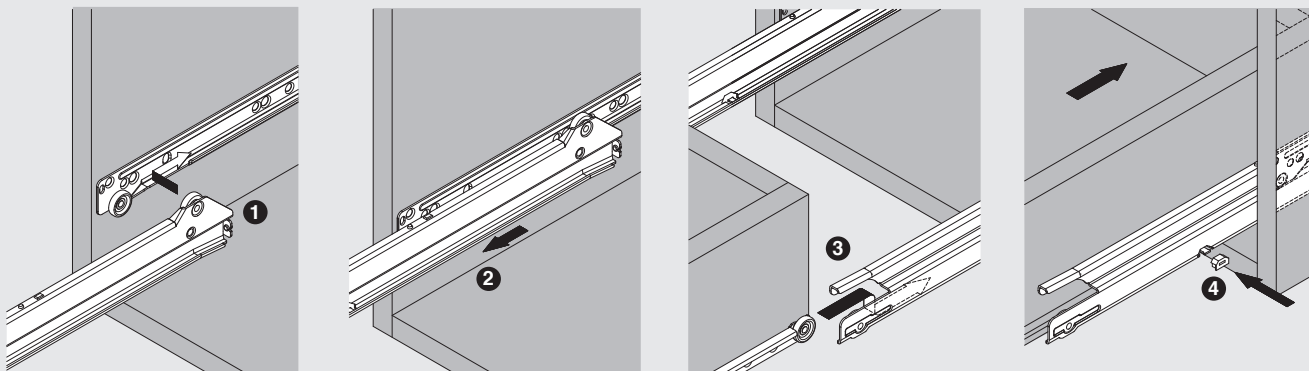

Notes

BASIC

Notes

BASIC

Aksesori Setia Sdn.Bhd.

Company No. 326521-M

Plot 32, Pengkalan Rishah 1
Kawasan Perindustrian Silibin
30100 Ipoh, Perak, Malaysia.

Tel : 605 520 6055

Fax : 605 520 6063

Email : info@harn.com

www.harn.com

harn[®]





harn[®] *moving innovations ►*

Impaz drawer system

product
assembly
installation

IMPRESSIVE IMPAZ

Designed to inspire with the assurance of quality and reliability, the Harn Impaz drawer system and its versatile accessories make it ideal for most applications. Configurations are only limited by one's imagination. The installation and assembly procedures are designed to be fast, simple and precise using minimum tools. Impaz is a reliable, stylish, practical and economical solution for modern kitchens, homes and offices. It will impress even the most discerning users.



YOUR IDEAL DRAWER

The drawer sides come in four heights and six lengths to suit various storage requirements. Drawer sides and runners are epoxy coated in attractive colours guaranteed to compliment most cabinet finishes. The epoxy coating forms a smooth surface that is highly scratch resistance and easy to clean, keeping your cabinets looking great for many years.

The accessories offer options to customise and organise storage space and its contents. The Plug-In drawer sides, Clip-On front fixing brackets and Steel Backs offer assembly processes that provide optimal speed and precision.



FEATURE PACKED

Impaz drawers were designed with users in mind. Emphasis was placed on aesthetics, functionality, safety and ergonomics.

The self-closing feature ensures drawers are always properly closed. The double out-stop feature holds the drawer in place when fully extended, preventing it from being pulled out from its runner and avoiding damages or injuries.

The full extension drawers allow the convenience of a full view of the contents and easy retrieval of items especially useful in the lower sections of cabinets.



PERFORMANCE ASSURED

At Harn, quality is of paramount importance and does not stop at the product itself. We ensure our products are able to meet and exceed the expectations of our customers. We have a comprehensive Quality Management System framework and our work processes are ISO 9001 certified.

The Impaz drawer system is subject to stringent in-house tests to ensure it is fit for the most extreme conditions. Users can be assured of its performance and quality.






THE IDEAL SOLUTION

Impaz is available in single and full extension versions. The full extension offers an unobstructed view of the entire drawer when fully extended. The full extension kit readily converts a single extension drawer into a full extension drawer by exchanging the cabinet members.

The drawer sides come in heights of 85mm, 117mm, 149mm and 213mm. Drawer lengths range from 250mm to 550mm. Steel backs provide an option for sturdier drawers while Side Extends increase drawer depth.

Cabinetmakers are also provided with options that will minimise assembly time. The Plug-in drawer sides with Steel backs and Clip-on front brackets allow a drawer to be assembled in minimum time and effort. Jigs and templates assist in precise drawer assembly.



Impaz is the ideal solution for both users and cabinetmakers.

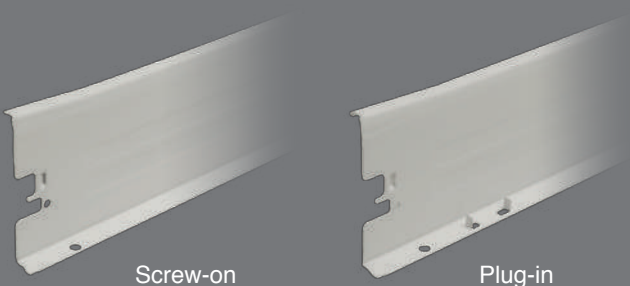

Screw-on

Plug-in



	Single Extension	Full Extension
Drawer S Standard Drawer Standard Inner Drawer Drawer Height - 85mm	  6	  22
Drawer T Standard Drawer Standard Inner Drawer Drawer Height - 117mm	  8	  24
Drawer U Standard Drawer Standard Inner Drawer Drawer Height - 149mm	  10	  26
Drawer V Standard Drawer Drawer Height - 213mm	 12	 28
Drawer MS Railing M Standard Drawer Drawer Height - 149mm	 14	 30
Drawer HS Double Railing H Standard Drawer Drawer Height - 213mm	 16	 32
Side Extend MS / HS Railing M / H Standard Drawer Drawer Height - 149mm / 213mm	 18	 34
Filing System	 20	 36
Divider Railing		 38  39
Full Extension Kit		 40
Larder Unit		 42
Accessories	44	Jigs & Devices 51
Assembly, Removal and Adjustments	46	


IMPAZ




Standard Drawer / Inner Drawer S - Single Extension

IMPAZ



- Single extension
- Steel drawer side panels 85mm
- Epoxy coated
- Load capacity of 30kg
- Self closing feature
- Flexible 2-dimensional front adjustment
- Smooth rolling mechanism
- Double out-stop safety feature
- Locked-in position when fully extended

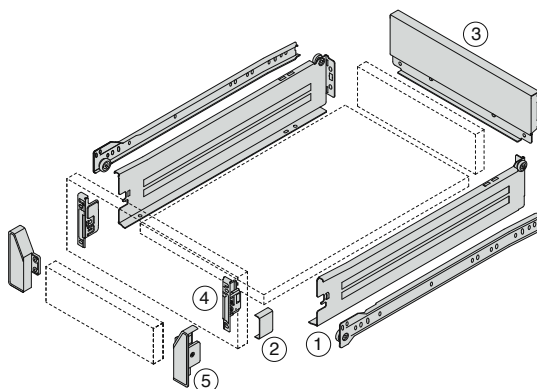

① 	Cabinet Profile Drawer Side Left / Right :			
Drawer Length	Screw-on		Plug-in	
270mm	4020.27.XX		4021.27.XX	
350mm	4020.35.XX		4021.35.XX	
400mm	4020.40.XX		4021.40.XX	
450mm	4020.45.XX		4021.45.XX	
500mm	4020.50.XX		4021.50.XX	
550mm	4020.55.XX		4021.55.XX	
② 	Cover Cap-plain for Standard brackets		③ 	Steel Back
	2X	RBC.61040.XX		
	Cover Cap-plain for Clip-on brackets		Cabinet Width (16mm side panel)	Standard
		RBC.66240.XX	400mm	RSB02.336.XX
	Order Left & Right		450mm	RSB02.386.XX
④ - steel nickel plated 	Front Fixing Bracket - Standard		500mm	RSB02.436.XX
	 Screw-on	RBF.11240.NI	550mm	RSB02.486.XX
	 Press-in	RBF.12240.NI	600mm	RSB02.536.XX
	 Expansion	RBF.13240.NI		
	Order Left & Right			
	Front Fixing Bracket - Clip-on			
	 Screw-on	RBF.16240.NI		
	 Press-in	RBF.17240.NI		
	 Expansion	RBF.18240.NI		
	Order Left & Right			
⑤ 	Front Fixing Bracket			
		RBF.31040.XX		
	Order Left & Right			

Colour Code XX
Standard : 01 – R907
Available Upon Request

Colour Code XX
 Standard : 01 – R9010 White
 Available Upon Request : 02 – R9001 Cream 21 – R7004 Grey 24 – R7037 Dust Grey

() Inner Drawer * Add 8mm when used with 201.000 Drawer Front Locking Piece.

Cutting Dimensions for 16mm Chipboard

Technical drawing of a roof structure showing dimensions and pre-drill specifications. The drawing includes a side elevation and a plan view. Dimensions are given in millimeters: 69, 32, and 9. A label indicates 'Pre-drill Ø5mm x 9mm deep'.

A technical drawing of a rectangular tray with a raised rim. The drawing shows the tray from a perspective view. The rim is composed of two parts: a base rim and a top rim. The top rim is shown in a dashed line, indicating it is a hidden part of the assembly. The tray is labeled with dimensions: 'L' for length, 'B' for width, and 'H' for height. The drawing is labeled 'Fig. 1' and 'Fig. 2'.

Width = Internal cabinet width - 31mm
 Length (wooden back) = Drawer length - 2mm
 Length (steel back) = Drawer length - 12mm

Front panel
Width = Internal cabinet width - 64mm
Height = 61mm

Width = Internal cabinet width - 31mm
Length (wooden back) = Drawer length - 18mm
Length (steel back) = Drawer length - 28mm


IMPAZ




Standard Drawer / Inner Drawer T - Single Extension

IMPAZ



- Single extension
- Steel drawer side panels 117mm
- Epoxy coated
- Load capacity of 30kg
- Self closing feature
- Flexible 2-dimensional front adjustment
- Smooth rolling mechanism
- Double out-stop safety feature
- Locked-in position when fully extended

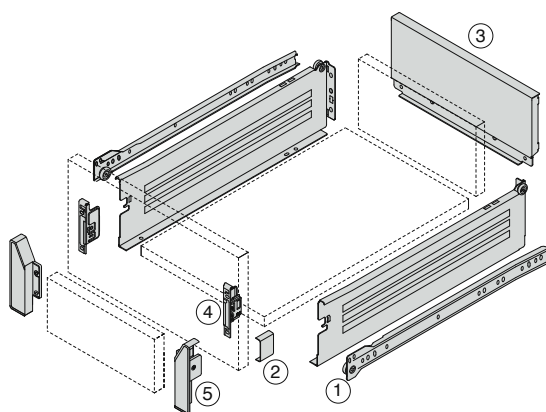

① 	Cabinet Profile Drawer Side Left / Right :		
Drawer Length	Screw-on		Plug-in
250mm	4320.25.XX		4321.25.XX
350mm	4320.35.XX		4321.35.XX
400mm	4320.40.XX		4321.40.XX
450mm	4320.45.XX		4321.45.XX
500mm	4320.50.XX		4321.50.XX
550mm	4320.55.XX		4321.55.XX
② 	Cover Cap-plain for Standard brackets		③ 
	2X	RBC.61040.XX	
	Cover Cap-plain for Clip-on brackets		Cabinet Width (16mm side panel)
		RBC.66240.XX	Standard
	Order Left & Right		400mm
			450mm
			500mm
			550mm
			600mm
④ - steel nickel plated 	Front Fixing Bracket - Standard		RSB32.336.XX
	 Screw-on	RBF.11240.NI	RSB32.386.XX
	 Press-in	RBF.12240.NI	RSB32.436.XX
	 Expansion	RBF.13240.NI	RSB32.486.XX
	Order Left & Right		RSB32.536.XX
	Front Fixing Bracket - Clip-on		
	 Screw-on	RBF.16240.NI	
	 Press-in	RBF.17240.NI	
	 Expansion	RBF.18240.NI	
	Order Left & Right		
⑤ 	Front Fixing Bracket		
		RBF.33040.XX	
	Order Left & Right		

Colour Code XX
Standard : 01 – R907
Available Upon Request

Colour Code XX
 Standard : 01 – R9010 White
 Available Upon Request : 02 – R9001 Cream 21 – R7004 Grey 24 – R7037 Dust Grey

9


IMPAZ

Standard Drawer / Inner Drawer U - Single Extension

IMPAZ



- Single extension
- Steel drawer side panels 149mm
- Epoxy coated
- Load capacity of 30kg
- Self closing feature
- Flexible 2-dimensional front adjustment
- Smooth rolling mechanism
- Double out-stop safety feature
- Locked-in position when fully extended

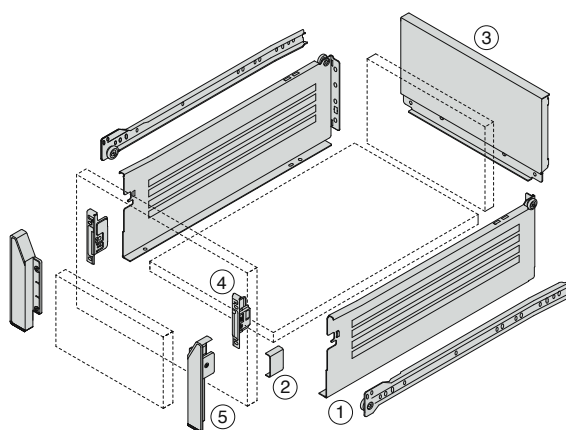

①	Cabinet Profile Drawer Side Left / Right :		
	Drawer Length	Screw-on	Plug-in
	350mm	4620.35.XX	4621.35.XX
	400mm	4620.40.XX	4621.40.XX
	450mm	4620.45.XX	4621.45.XX
	500mm	4620.50.XX	4621.50.XX
	550mm	4620.55.XX	4621.55.XX
②	Cover Cap-plain for Standard brackets		③
	2X	RBC.61040.XX	
	Cover Cap-plain for Clip-on brackets		Cabinet Width (16mm side panel)
		RBC.66240.XX	
	Order Left & Right		Standard
			400mm
			450mm
			500mm
			550mm
			600mm
④ - steel nickel plated	Front Fixing Bracket - Standard		
	Screw-on	RBF.11240.NI	
	Press-in	RBF.12240.NI	
	Expansion	RBF.13240.NI	
	Order Left & Right		
	Front Fixing Bracket - Clip-on		
	Screw-on	RBF.16240.NI	
	Press-in	RBF.17240.NI	
	Expansion	RBF.18240.NI	
	Order Left & Right		
⑤	Front Fixing Bracket		
		RBF.36040.XX	
	Order Left & Right		


Colour Code XX
Standard : 01 – R9010 White
Available Upon Request : 02 – R9001 Cream 21 – R7004 Grey 24 – R7037 Dust Grey

() Inner Drawer * Add 8mm when used with 201.000 Drawer Front Locking Piece.


Cutting Dimensions for 16mm Chipboard

Min. Internal Cabinet Depth = Drawer Length + 3mm

Drilling Template see page 52

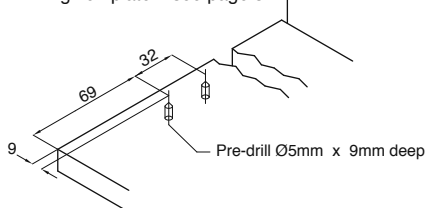

Back panel _____
Width = Internal cabinet width - 31mm
Height = 135mm



Bottom panel


Width = Internal cabinet width - 31mm

Length (wooden back) = Drawer length - 2mm

Length (steel back) = Drawer length - 12mm

Back panel _____
Width = Internal cabinet width - 31mm
Height = 135mm

Front panel
Width = Internal cabinet width - 64mm
Height = 125mm



Bottom panel


Width = Internal cabinet width - 31mm



Length (wooden back) = Drawer length - 18mm

Length (steel back) = Drawer length - 28mm




- Single extension
- Steel drawer side panels 213mm
- Epoxy coated
- Load capacity of 30kg
- Self closing feature
- Flexible 2-dimensional front adjustment
- Smooth rolling mechanism
- Double out-stop safety feature
- Locked-in position when fully extended

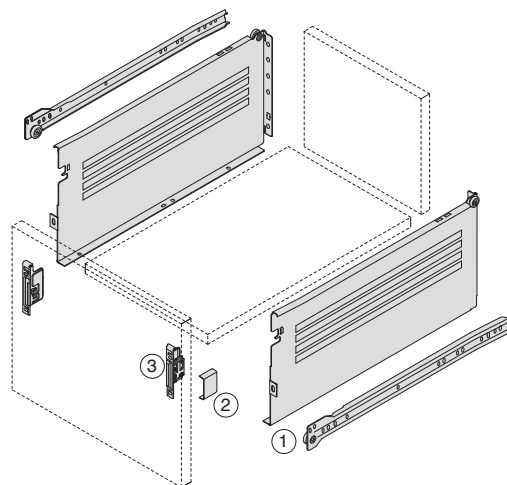


① 	Cabinet Profile Drawer Side Left / Right :	
Drawer Length	Screw-on	Plug-in
350mm	4920.35.XX	4921.35.XX
500mm	4920.50.XX	4921.50.XX
② 	Cover Cap-plain for Standard brackets	
	2X	RBC.61040.XX
	Cover Cap-plain for Clip-on brackets	
		RBC.66240.XX
	Order Left & Right	
③ - steel nickel plated 	Front Fixing Bracket - Standard	
	 Screw-on	RBF.11240.NI
	 Press-in	RBF.12240.NI
	 Expansion	RBF.13240.NI
	Order Left & Right	
	Front Fixing Bracket - Clip-on	
	 Screw-on	RBF.16240.NI
	 Press-in	RBF.17240.NI
	 Expansion	RBF.18240.NI
	Order Left & Right	

Space Requirements and Front Installation Dimensions

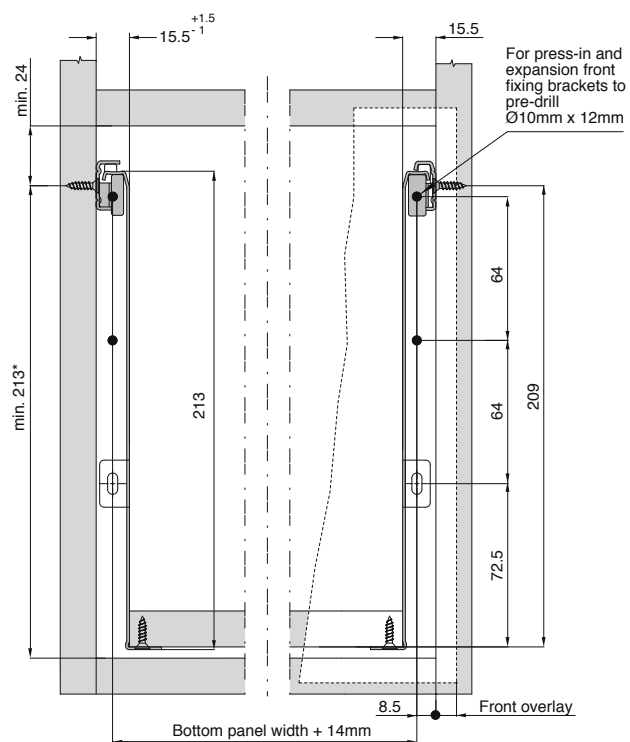

* Add 8mm when used with 201.000 Drawer Front Locking Piece.

Back Installation Dimensions

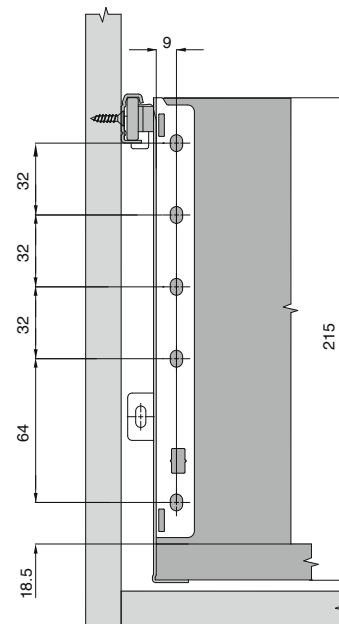


Cabinet Profile Screw Positions

Drawer Length

Min. Internal Cabinet Depth = Drawer Length + 3mm

350mm


500mm



Cutting Dimensions for 16mm Chipboard

Standard Drawer


Back panel
Width = Internal cabinet width - 31mm
Height = 199mm



Bottom panel
Width = Internal cabinet width - 31mm
Length (wooden back) = Drawer length - 2mm


Pre-drilling Dimensions of Bottom Panel for Plug-in





Drilling Template see page 52

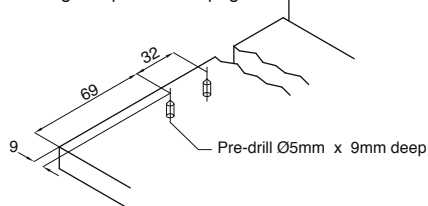




- Single extension
- Steel drawer side panels 85mm
- Epoxy coated
- Load capacity of 30kg
- Self closing feature
- Flexible 2-dimensional front adjustment
- Smooth rolling mechanism
- Double out-stop safety feature
- Locked-in position when fully extended
- Tilt adjustment of drawer front

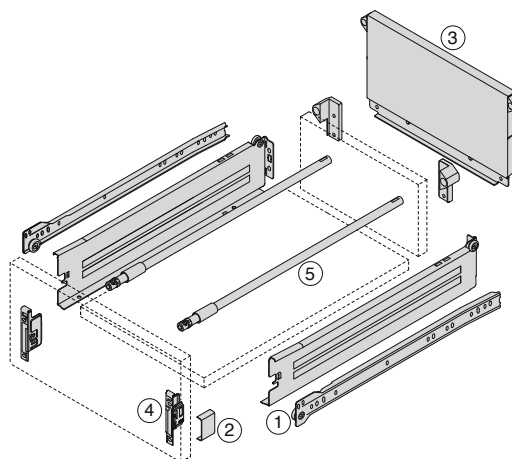

① 	Cabinet Profile Drawer Side Left / Right :		⑤ 	Railing Set Left / Right :	
Drawer Length	Screw-on	Plug-in	Inclusive of Screw-on and Expansion railing adaptor		
350mm	4020.35.XX	4021.35.XX	RRA-NE.331.XX		
400mm	4020.40.XX	4021.40.XX	RRA-NE.381.XX		
450mm	4020.45.XX	4021.45.XX	RRA-NE.431.XX		
500mm	4020.50.XX	4021.50.XX	RRA-NE.481.XX		
550mm	4020.55.XX	4021.55.XX	RRA-NE.531.XX		
② 	Cover Cap-plain for Standard brackets		③ 	Steel Back	
	2X	RBC.61040.XX			
	Cover Cap-plain for Clip-on brackets		Cabinet Width (16mm side panel)	System MS	System HS
		RBC.66240.XX	400mm	RSB02R.336.XX	Available Upon Request
	Order Left & Right		450mm	RSB02R.386.XX	
			500mm	RSB02R.436.XX	
			550mm	RSB02R.486.XX	
④ - steel nickel plated	Front Fixing Bracket - Standard		600mm	RSB02R.536.XX	
	 Screw-on	RBF.11240.NI			
	 Press-in	RBF.12240.NI			
	 Expansion	RBF.13240.NI			
	Order Left & Right				
	Front Fixing Bracket - Clip-on				
	 Screw-on	RBF.16240.NI			
	 Press-in	RBF.17240.NI			
	 Expansion	RBF.18240.NI			
	Order Left & Right				


Colour Code XX
 Standard : 01 – R9010 White
 Available Upon Request : 02 – R9001 Cream 21 – R7004 Grey 24 – R7037 Dust Grey

Space Requirements and Front Installation Dimensions

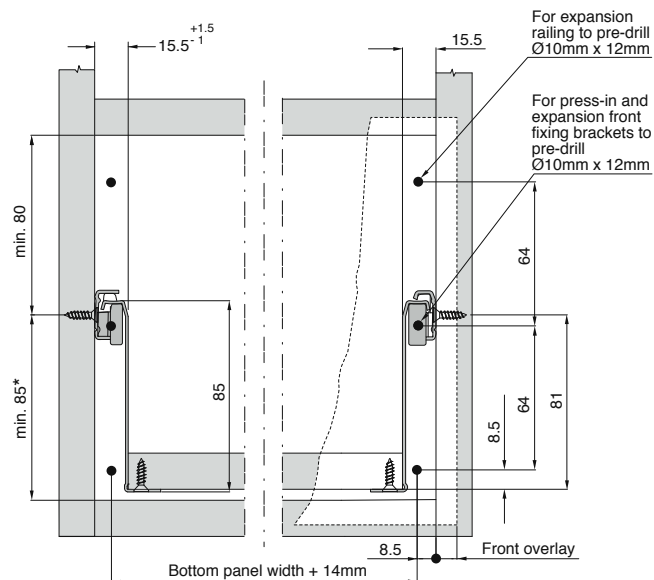

* Add 8mm when used with 201.000 Drawer Front Locking Piece.

Back Installation Dimensions

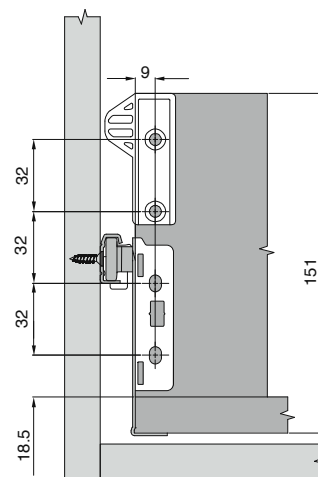

Cabinet Profile Screw Positions

Drawer Length

Min. Internal Cabinet Depth = Drawer Length + 3mm


350mm

400mm

450mm

500mm


550mm

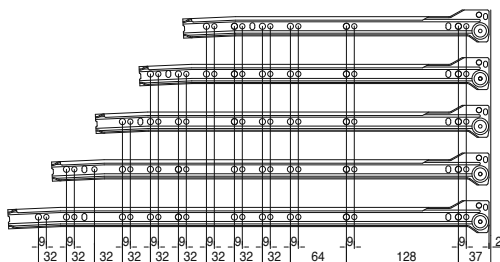

Cutting Dimensions for 16mm Chipboard

Standard Drawer


Back panel
Width = Internal cabinet width - 31mm
Height = 135mm



Bottom panel
Width = Internal cabinet width - 31mm
Length (wooden back) = Drawer length - 2mm
Length (steel back) = Drawer length - 12mm



Pre-drilling Dimensions of Bottom Panel for Plug-in

Drilling Template see page 52

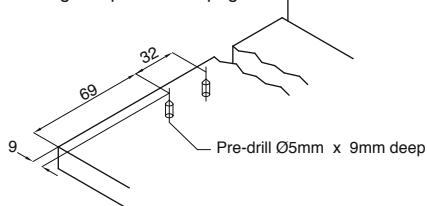




- Single extension
- Steel drawer side panels 85mm
- Epoxy coated
- Load capacity of 30kg
- Self closing feature
- Flexible 2-dimensional front adjustment
- Smooth rolling mechanism
- Double out-stop safety feature
- Locked-in position when fully extended
- Tilt adjustment of drawer front

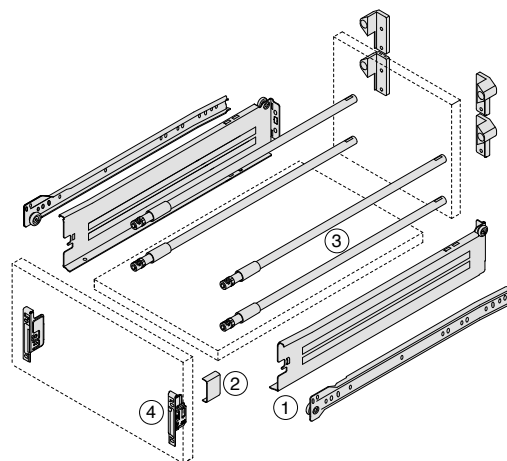

**Cabinet Profile Drawer Side
Left / Right :**



**Railing Set
Left / Right :**

Drawer Length	Screw-on	Plug-in	Inclusive of Screw-on and Expansion railing adaptor	
350mm	4020.35.XX	4021.35.XX	2X	RRA-NE.331.XX
400mm	4020.40.XX	4021.40.XX	2X	RRA-NE.381.XX
450mm	4020.45.XX	4021.45.XX	2X	RRA-NE.431.XX
500mm	4020.50.XX	4021.50.XX	2X	RRA-NE.481.XX
550mm	4020.55.XX	4021.55.XX	2X	RRA-NE.531.XX



Cover Cap-plain for Standard brackets


2X RBC.61040.XX



Cover Cap-plain for Clip-on brackets


RBC.66240.XX

Order Left & Right



Front Fixing Bracket - Standard

	Screw-on	RBF.11240.NI
	Press-in	RBF.12240.NI
	Expansion	RBF.13240.NI
Order Left & Right		




Front Fixing Bracket - Clip-on

	Screw-on	RBF.16240.NI
	Press-in	RBF.17240.NI
	Expansion	RBF.18240.NI
Order Left & Right		


Colour Code XX
Standard : 01 – R9010 White
Available Upon Request : 02 – R9001 Cream 21 – R7004 Grey 24 – R7037 Dust Grey

Space Requirements and Front Installation Dimensions

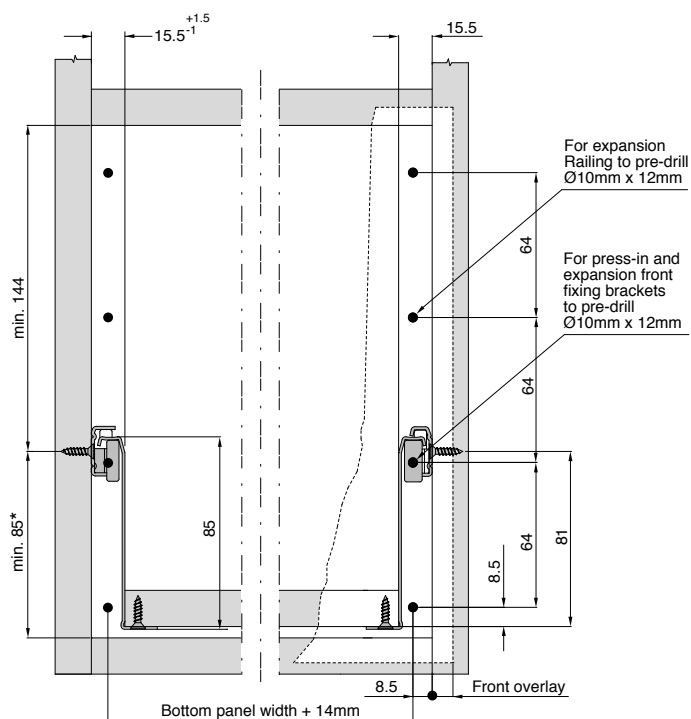

* Add 8mm when used with 201.000 Drawer Front Locking Piece.

Back Installation Dimensions

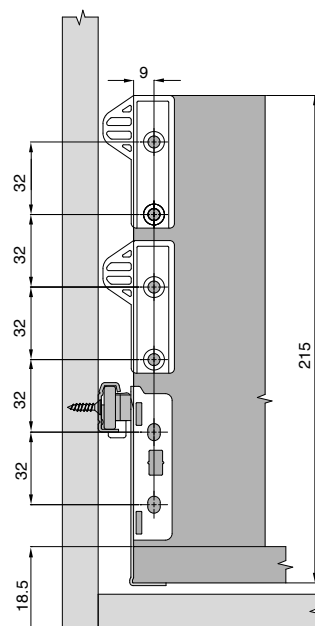


Cabinet Profile Screw Positions

Drawer Length

Min. Internal Cabinet Depth = Drawer Length + 3mm


350mm
400mm
450mm
500mm
550mm

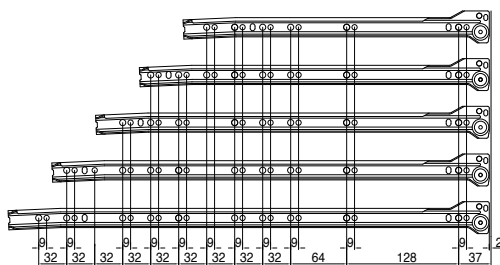

Cutting Dimensions for 16mm Chipboard

Standard Drawer

Back panel _____
Width = Internal cabinet width - 31mm
Height = 199mm




Bottom panel

Width = Internal cabinet width - 31mm
Length (wooden back) = Drawer length - 2mm
Length (steel back) = Drawer length - 12mm


Pre-drilling Dimensions of Bottom Panel for Plug-in




Drilling Template see page 52

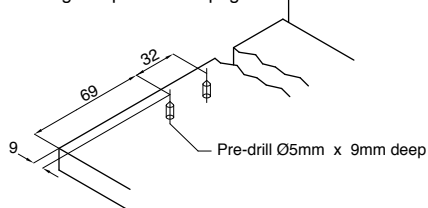



- Single extension
- Steel drawer side panels 85mm
- Epoxy coated
- Load capacity of 30kg
- Self closing feature
- Flexible 2-dimensional front adjustment
- Smooth rolling mechanism
- Double out-stop safety feature
- Locked-in position when fully extended
- Tilt adjustment of drawer front

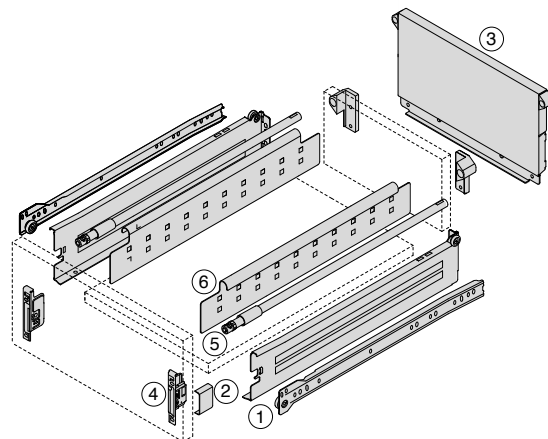


① 	Cabinet Profile Drawer Side Left / Right :		⑤ 	Railing Set Left / Right :	
Drawer Length	Screw-on	Plug-in	Inclusive of Screw-on and Expansion railing adaptor		
350mm	4020.35.XX	4021.35.XX	RRA-NE.331.XX		
400mm	4020.40.XX	4021.40.XX	RRA-NE.381.XX		
450mm	4020.45.XX	4021.45.XX	RRA-NE.431.XX		
500mm	4020.50.XX	4021.50.XX	RRA-NE.481.XX		
550mm	4020.55.XX	4021.55.XX	RRA-NE.531.XX		
② 	Cover Cap-plain for Standard brackets		③ 	Steel Back	
	2X	RBC.61040.XX			
	Cover Cap-plain for Clip-on brackets		Cabinet Width (16mm side panel)	System MS	System HS
		RBC.66240.XX	400mm	RSB02R.336.XX	Available Upon Request
		Order Left & Right	450mm	RSB02R.386.XX	
			500mm	RSB02R.436.XX	
			550mm	RSB02R.486.XX	
			600mm	RSB02R.536.XX	
④ - steel nickel plated 	Front Fixing Bracket - Standard		⑥ 	Side Extend	
	 Screw-on	RBF.11240.NI	Drawer Length	System MS	System HS
	 Press-in	RBF.12240.NI	350mm	2X RSE064.350.XX	2X RSE128.350.XX
	 Expansion	RBF.13240.NI	400mm	2X RSE064.400.XX	2X RSE128.400.XX
		Order Left & Right	450mm	2X RSE064.450.XX	2X RSE128.450.XX
	Front Fixing Bracket - Clip-on		500mm	2X RSE064.500.XX	2X RSE128.500.XX
	 Screw-on	RBF.16240.NI	550mm	2X RSE064.550.XX	2X RSE128.550.XX
	 Press-in	RBF.17240.NI			
	 Expansion	RBF.18240.NI			
		Order Left & Right			

Colour Code XX
Standard : 01 – R9010 White
Available Upon Request : 02 – R9001 Cream 21 – R7004 Grey 24 – R7037 Dust Grey



IMPAP

System HS

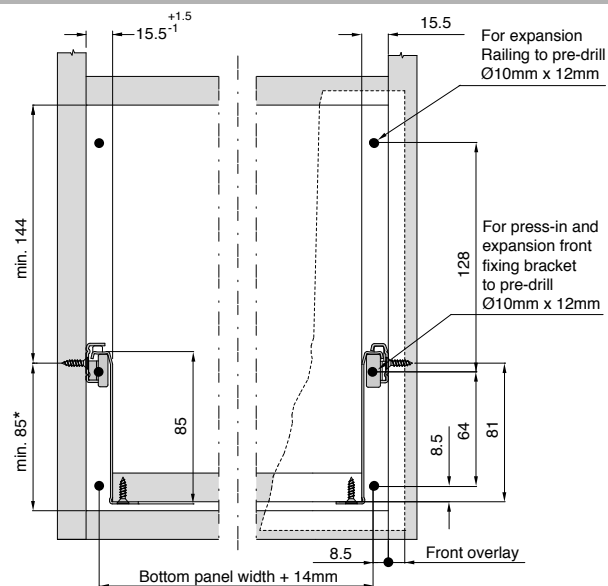

Back Installation Dimensions


System HS

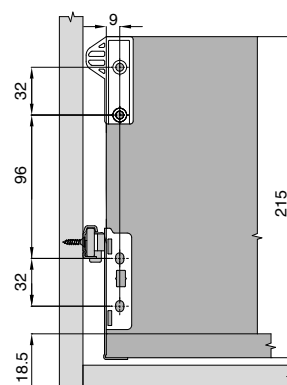


Cutting Dimensions for 16mm Chipboard

Min. Internal Cabinet Depth = Drawer Length + 3mm

550mm

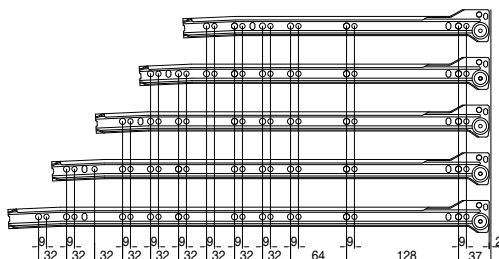


Back panel _____
 Width = Internal cabinet width - 31mm
 Height (System MS) = 135mm
 Height (System HS) = 199mm




Width = Internal cabinet width - 31mm
Length (wooden back) = Drawer length - 2mm
Length (steel back) = Drawer length - 12mm





Drilling Template see page 52

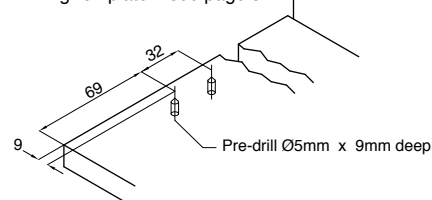




- Single extension
- Steel drawer side panels 85mm
- Epoxy coated
- Load capacity of 30kg
- Self closing feature
- Flexible 2-dimensional front adjustment
- Smooth rolling mechanism
- Double out-stop safety feature
- Locked-in position when fully extended

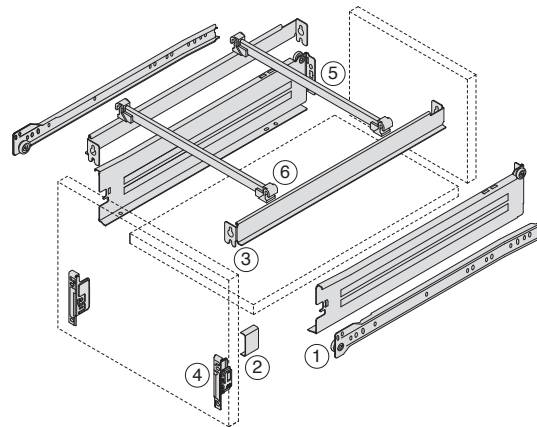

① 	Cabinet Profile Drawer Side Left / Right :		③ 	Side Hanging Rail Left / Right :
Drawer Length	Screw-on	Plug-in	Drawer Length	
450mm	4020.45.XX	4021.45.XX	450mm	RMF.450.XX
500mm	4020.50.XX	4021.50.XX	500mm	RMF.500.XX
550mm	4020.55.XX	4021.55.XX	550mm	RMF.550.XX
② 	Cover Cap-plain for Standard brackets		⑤ 	Cross Hanging Rail
	2X	RBC.61040.XX		RMF-C.475.XX
	Cover Cap-plain for Clip-on brackets			
		RBC.66240.XX	⑥ 	Cross Hanging Rail Connector
	Order Left & Right			
④ - steel nickel plated 	Front Fixing Bracket - Standard		2X for each Cross Railing	RFC.8600.NA
	 Screw-on	RBF.11240.NI		
	 Press-in	RBF.12240.NI		
	 Expansion	RBF.13240.NI		
	Order Left & Right			
	Front Fixing Bracket - Clip-on			
	 Screw-on	RBF.16240.NI		
	 Press-in	RBF.17240.NI		
	 Expansion	RBF.18240.NI		
	Order Left & Right			


Colour Code XX
Standard : 01 – R9010 White
Available Upon Request : 02 – R9001 Cream 21 – R7004 Grey 24 – R7037 Dust Grey

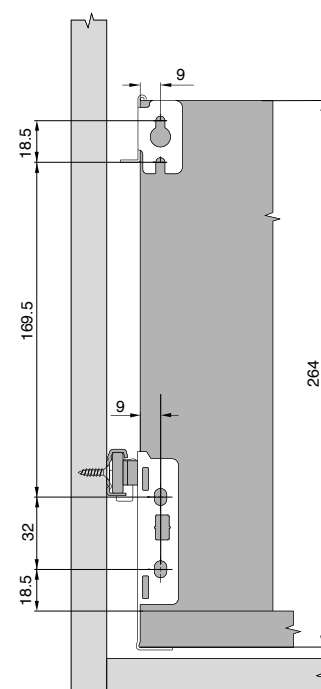


Cutting Dimensions for 16mm Chipboard

Min. Internal Cabinet Depth = Drawer Length + 3mm

550mm

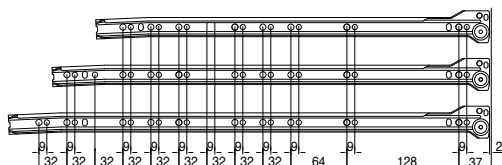


Back panel _____
Width = Internal cabinet width - 31mm
Height = 248mm




Bottom panel
Width = Internal cabinet width - 31mm
Length (wooden back) = Drawer length - 2mm

Drilling Template see page 52

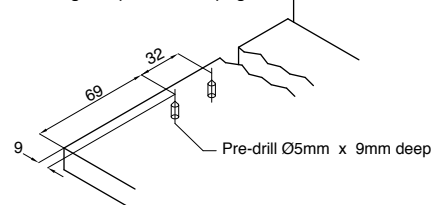

DIN A4 Along Drawer Length

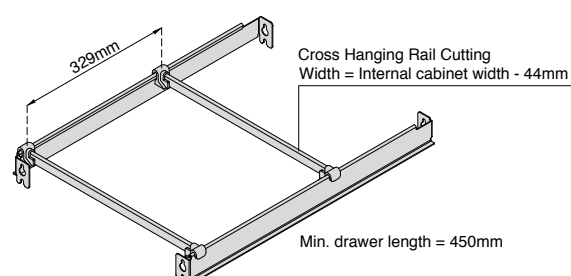


IMPAZ

Standard Drawer / Inner Drawer S - Full Extension

IMPAZ



- Full extension
- Steel drawer side panels 85mm
- Epoxy coated
- Load capacity of 40kg
- Self closing feature
- Flexible 2-dimensional front adjustment
- Smooth rolling mechanism
- Double out-stop safety feature
- Locked-in position when fully extended

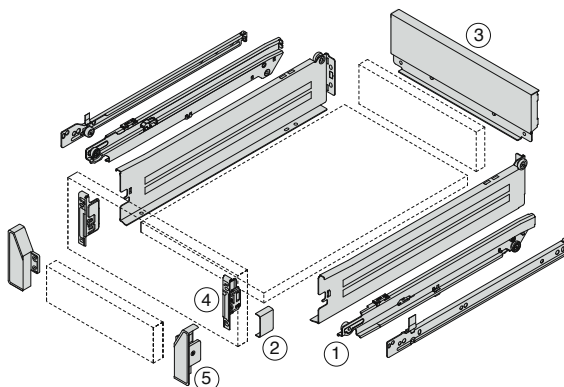

①	Cabinet Profile Drawer Side Left / Right :		
Drawer Length	Screw-on	Plug-in	
270mm	5020N.27.XX	5021N.27.XX	
350mm	5020N.35.XX	5021N.35.XX	
400mm	5020N.40.XX	5021N.40.XX	
450mm	5020N.45.XX	5021N.45.XX	
500mm	5020N.50.XX	5021N.50.XX	
550mm	5020N.55.XX	5021N.55.XX	
②	Cover Cap-plain for Standard brackets		
2X	RBC.61040.XX		
③	Steel Back		
④	Cover Cap-plain for Clip-on brackets		
RBC.66240.XX			
Order Left & Right			
④ - steel nickel plated	Front Fixing Bracket - Standard		
Screw-on	RBF.11240.NI		
Press-in	RBF.12240.NI		
Expansion	RBF.13240.NI		
Order Left & Right			
⑤	Front Fixing Bracket - Clip-on		
Screw-on	RBF.16240.NI		
Press-in	RBF.17240.NI		
Expansion	RBF.18240.NI		
Order Left & Right			
⑤	Front Fixing Bracket		
RBF.31040.XX			
Order Left & Right			

Colour Code XX
Standard : 01 – R9010 White
Available Upon Request : 02 – R9001 Cream 21 – R7004 Grey 24 – R7037 Dust Grey

() Inner Drawer * Add 8mm when used with 201.000 Drawer Front Locking Piece.

23

IMPAZ




-
- This exploded view diagram illustrates the assembly of the Knauf ceiling grid. The components are numbered as follows:
- 1:** Longitudinal T-bar with integrated spring clips.
 - 2:** Small square connector or spacer.
 - 3:** Rectangular panel with a decorative or functional surface.
 - 4:** Vertical support or clip component.
 - 5:** Vertical support or clip component, shown in a different orientation.
- The diagram shows how these parts interlock to form a complete ceiling grid structure.

Colour Code XX
Standard : 01 – R9010 White
Available Upon Request : 02 – R9001 Cream 21 – R7004 Grey 24 – R7037 Dust Grey


() Inner Drawer * Add 8mm when used with 201.000 Drawer Front Locking Piece.

Cutting Dimensions for 16mm Chipboard

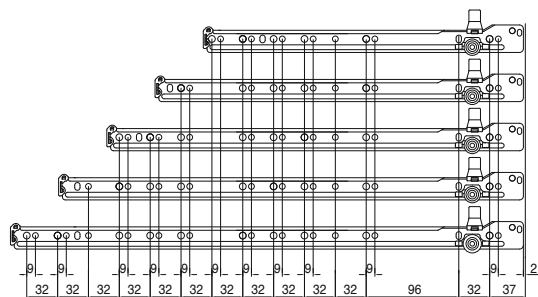

Bottom panel
 Width = Internal cabinet width - 31mm
 Length (wooden back) = Drawer length - 2mm
 Length (steel back) = Drawer length - 12mm

Front panel
Width = Internal cabinet width - 64mm
Height = 93mm

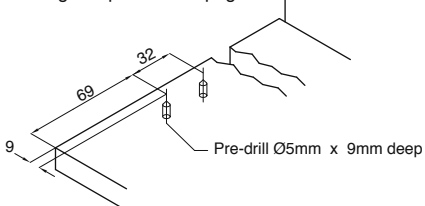

Bottom panel
 Width = Internal cabinet width - 31mm
 Length (wooden back) = Drawer length - 18mm
 Length (steel back) = Drawer length - 28mm


IMPAZ

Standard Drawer / Inner Drawer U - Full Extension

IMPAZ



- Full extension
- Steel drawer side panels 149mm
- Epoxy coated
- Load capacity of 40kg
- Self closing feature
- Flexible 2-dimensional front adjustment
- Smooth rolling mechanism
- Double out-stop safety feature
- Locked-in position when fully extended

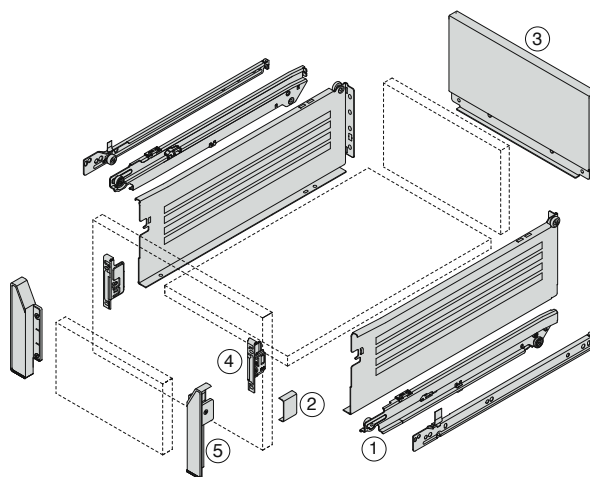


①	Cabinet Profile Drawer Side Left / Right :		
Drawer Length	Screw-on	Plug-in	
350mm	5620N.35.XX	5621N.35.XX	
400mm	5620N.40.XX	5621N.40.XX	
450mm	5620N.45.XX	5621N.45.XX	
500mm	5620N.50.XX	5621N.50.XX	
550mm	5620N.55.XX	5621N.55.XX	
②	Cover Cap-plain for Standard brackets		
	2X RBC.61040.XX		
	Cover Cap-plain for Clip-on brackets		
	RBC.66240.XX		
	Order Left & Right		
④ - steel nickel plated	Front Fixing Bracket - Standard		
	Screw-on	RBF.11240.NI	
	Press-in	RBF.12240.NI	
	Expansion	RBF.13240.NI	
	Order Left & Right		
	Front Fixing Bracket - Clip-on		
	Screw-on	RBF.16240.NI	
	Press-in	RBF.17240.NI	
	Expansion	RBF.18240.NI	
	Order Left & Right		
⑤	Front Fixing Bracket		
	RBF.36040.XX		
	Order Left & Right		

③	Steel Back	
	Cabinet Width (16mm side panel)	Standard
	400mm	RSB62.336.XX
	450mm	RSB62.386.XX
	500mm	RSB62.436.XX
	550mm	RSB62.486.XX
	600mm	RSB62.536.XX

Colour Code XX
Standard : 01 – R9010 White
Available Upon Request : 02 – R9001 Cream 21 – R7004 Grey 24 – R7037 Dust Grey

Space Requirements and Front Installation Dimensions

Back Installation Dimensions

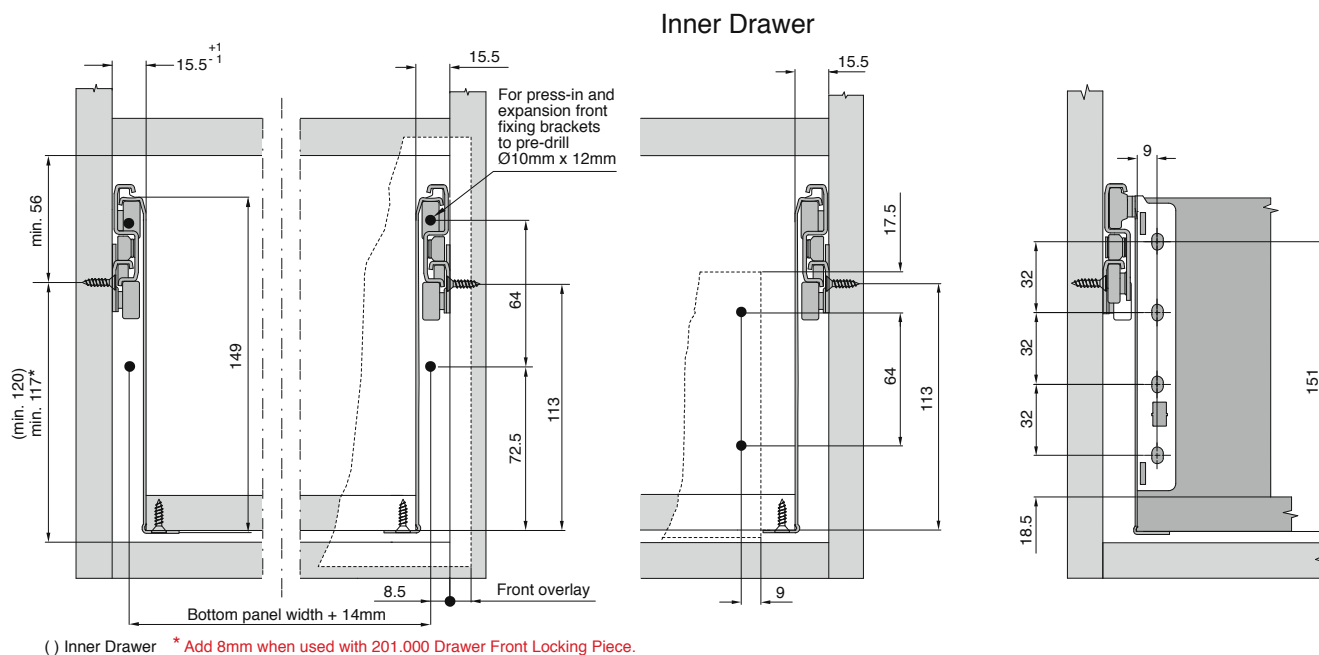

Cabinet Profile Screw Positions

Cutting Dimensions for 16mm Chipboard

Drawer Length

Min. Internal Cabinet Depth = Drawer Length + 8mm
Over Extension = 13mm


350mm

400mm

450mm


500mm

550mm

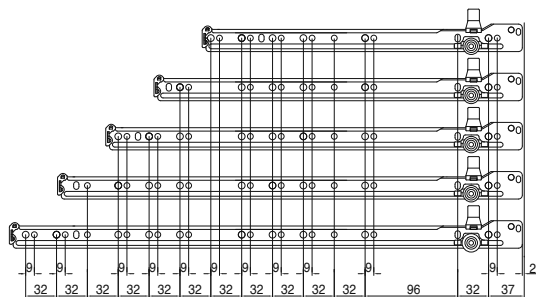

Standard Drawer

Back panel
Width = Internal cabinet width - 31mm
Height = 135mm




Bottom panel
Width = Internal cabinet width - 31mm
Length (wooden back) = Drawer length - 2mm
Length (steel back) = Drawer length - 12mm

Inner Drawer

Back panel
Width = Internal cabinet width - 31mm
Height = 135mm


Front panel
Width = Internal cabinet width - 64mm
Height = 125mm



Bottom panel
Width = Internal cabinet width - 31mm
Length (wooden back) = Drawer length - 18mm
Length (steel back) = Drawer length - 28mm

Pre-drilling Dimensions of Bottom Panel for Plug-in

Drilling Template see page 52

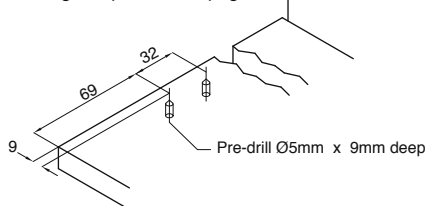


IMPAZ

Standard Drawer V - Full Extension

IMPAZ




- Full extension
- Steel drawer side panels 213mm
- Epoxy coated
- Load capacity of 40kg
- Self closing feature
- Flexible 2-dimensional front adjustment
- Smooth rolling mechanism
- Double out-stop safety feature
- Locked-in position when fully extended

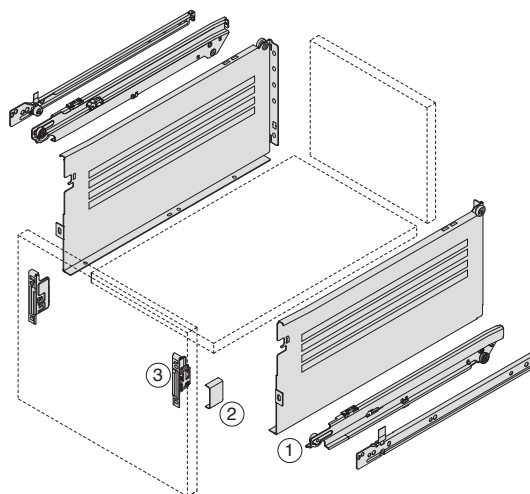

①	Cabinet Profile Drawer Side Left / Right :		
Drawer Length	Screw-on	Plug-in	
350mm	5920N.35.XX	5921N.35.XX	
500mm	5920N.50.XX	5921N.50.XX	
②	Cover Cap-plain for Standard brackets		
	2X	RBC.61040.XX	
③	Cover Cap-plain for Clip-on brackets		
		RBC.66240.XX	
	Order Left & Right		
③ - steel nickel plated	Front Fixing Bracket - Standard		
	Screw-on	RBF.11240.NI	
	Press-in	RBF.12240.NI	
	Expansion	RBF.13240.NI	
	Order Left & Right		
③	Front Fixing Bracket - Clip-on		
	Screw-on	RBF.16240.NI	
	Press-in	RBF.17240.NI	
	Expansion	RBF.18240.NI	
	Order Left & Right		


Colour Code XX
Standard : 01 – R9010 White
Available Upon Request : 02 – R9001 Cream 21 – R7004 Grey 24 – R7037 Dust Grey

Space Requirements and Front Installation Dimensions

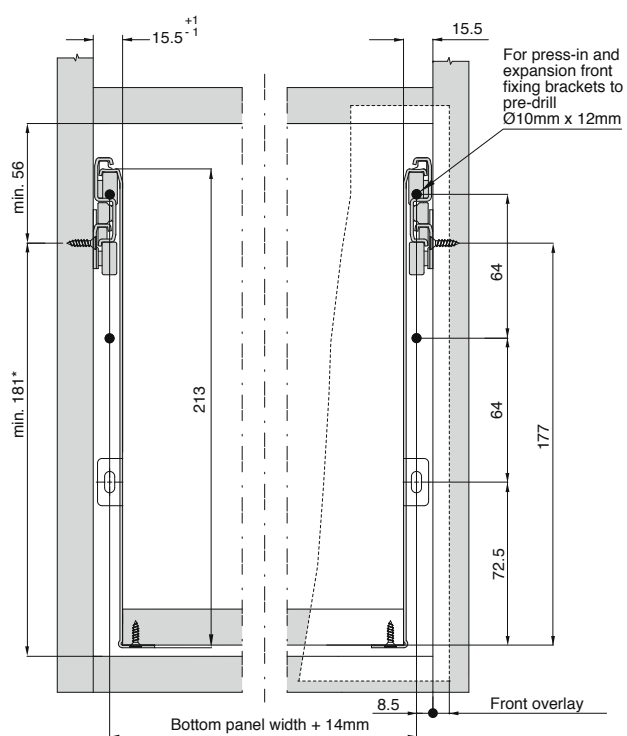

* Add 8mm when used with 201.000 Drawer Front Locking Piece.

Back Installation Dimensions

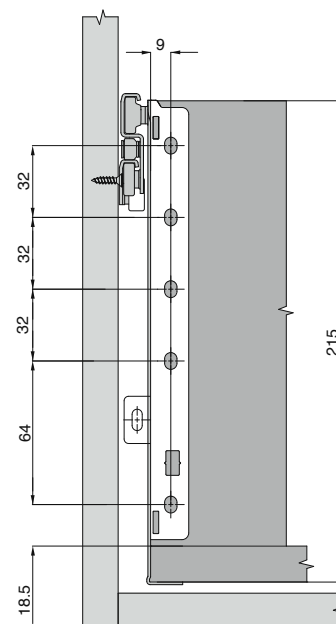


Cabinet Profile Screw Positions

Drawer Length

Min. Internal Cabinet Depth = Drawer Length + 8mm
Over Extension = 13mm

350mm


500mm



Cutting Dimensions for 16mm Chipboard

Standard Drawer


Back panel
Width = Internal cabinet width - 31mm
Height = 199mm



Bottom panel
Width = Internal cabinet width - 31mm
Length (wooden back) = Drawer length - 2mm


Pre-drilling Dimensions of Bottom Panel for Plug-in










Drilling Template see page 52

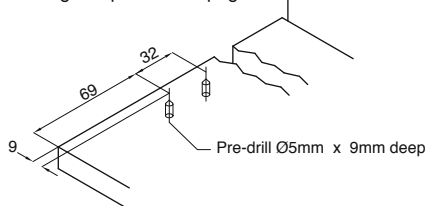




- Full extension
- Steel drawer side panels 85mm
- Epoxy coated
- Load capacity of 40kg
- Self closing feature
- Flexible 2-dimensional front adjustment
- Smooth rolling mechanism
- Double out-stop safety feature
- Locked-in position when fully extended
- Tilt adjustment of drawer front

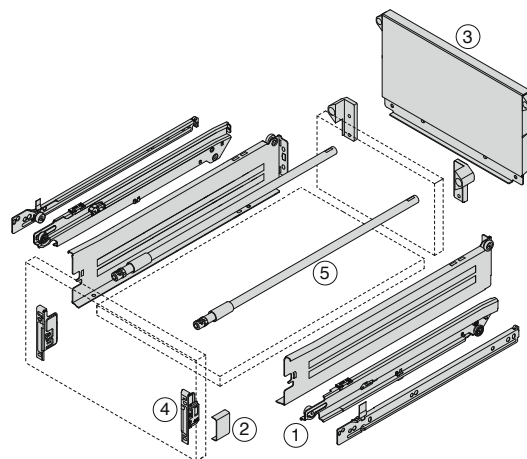

	Cabinet Profile Drawer Side Left / Right :		 Railing Set Left / Right :
Drawer Length	Screw-on	Plug-in	Inclusive of Screw-on and Expansion railing adaptor
350mm	5020N.35.XX	5021N.35.XX	RRA-NE.331.XX
400mm	5020N.40.XX	5021N.40.XX	RRA-NE.381.XX
450mm	5020N.45.XX	5021N.45.XX	RRA-NE.431.XX
500mm	5020N.50.XX	5021N.50.XX	RRA-NE.481.XX
550mm	5020N.55.XX	5021N.55.XX	RRA-NE.531.XX
	Cover Cap-plain for Standard brackets		 Steel Back
	Cover Cap-plain for Clip-on brackets		Cabinet Width (16mm side panel)
	2X	RBC.61040.XX	System MS
	Order Left & Right		System HS
	Front Fixing Bracket - Standard		400mm
	 Screw-on	RBF.11240.NI	450mm
	 Press-in	RBF.12240.NI	500mm
	 Expansion	RBF.13240.NI	550mm
	Order Left & Right		600mm
	Front Fixing Bracket - Clip-on		RSB02R.336.XX
	 Screw-on	RBF.16240.NI	RSB02R.386.XX
	 Press-in	RBF.17240.NI	RSB02R.436.XX
	 Expansion	RBF.18240.NI	RSB02R.486.XX
	Order Left & Right		RSB02R.536.XX


Colour Code XX
 Standard : 01 – R9010 White
 Available Upon Request : 02 – R9001 Cream 21 – R7004 Grey 24 – R7037 Dust Grey

Space Requirements and Front Installation Dimensions

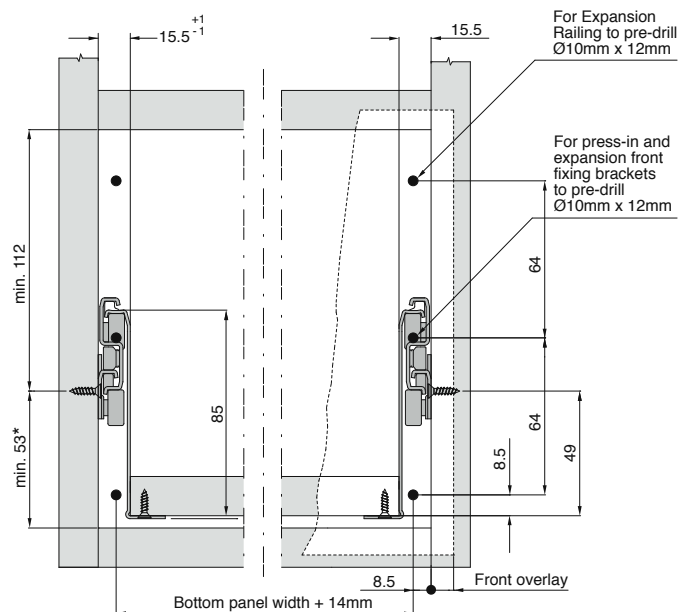

* Add 8mm when used with 201.000 Drawer Front Locking Piece.

Back Installation Dimensions

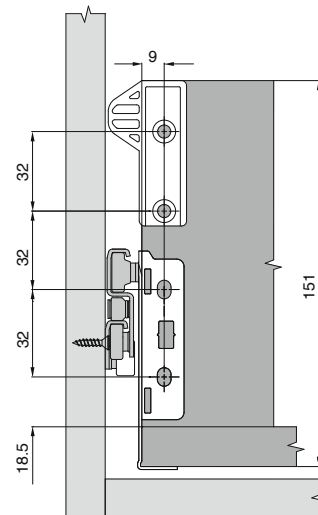

Cabinet Profile Screw Positions

Drawer Length

Min. Internal Cabinet Depth = Drawer Length + 8mm
Over Extension = 13mm


350mm

400mm

450mm

500mm


550mm

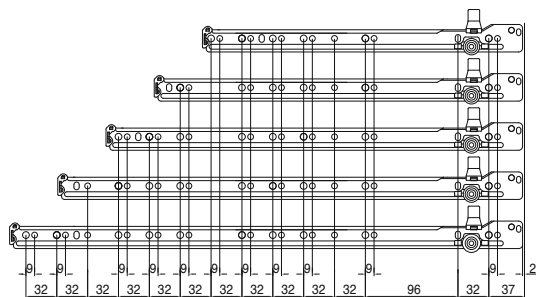

Cutting Dimensions for 16mm Chipboard

Standard Drawer


Back panel
Width = Internal cabinet width - 31mm
Height = 135mm



Bottom panel
Width = Internal cabinet width - 31mm
Length (wooden back) = Drawer length - 2mm
Length (steel back) = Drawer length - 12mm



Pre-drilling Dimensions of Bottom Panel for Plug-in

Drilling Template see page 52

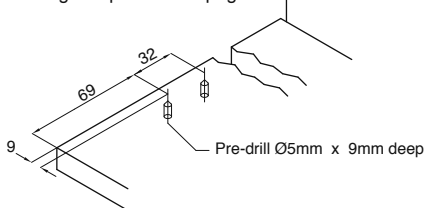



- Full extension
- Steel drawer side panels 85mm
- Epoxy coated
- Load capacity of 40kg
- Self closing feature
- Flexible 2-dimensional front adjustment
- Smooth rolling mechanism
- Double out-stop safety feature
- Locked-in position when fully extended
- Tilt adjustment of drawer front

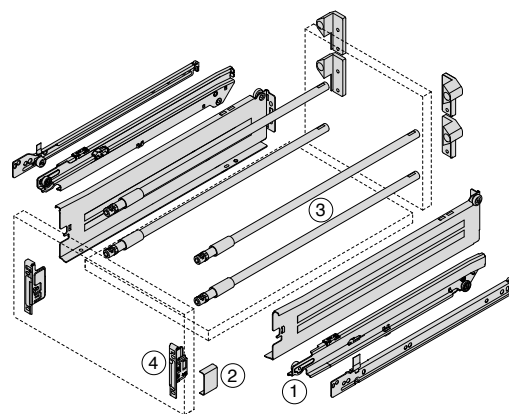


Cabinet Profile Drawer Side Left / Right :

Drawer Length

Screw-on

Plug-in



Railing Set Left / Right :


Inclusive of Screw-on and Expansion railing adaptor

350mm	5020N.35.XX	5021N.35.XX	2X	RRA-NE.331.XX
400mm	5020N.40.XX	5021N.40.XX	2X	RRA-NE.381.XX
450mm	5020N.45.XX	5021N.45.XX	2X	RRA-NE.431.XX
500mm	5020N.50.XX	5021N.50.XX	2X	RRA-NE.481.XX
550mm	5020N.55.XX	5021N.55.XX	2X	RRA-NE.531.XX



Cover Cap-plain for Standard brackets


2X RBC.61040.XX



Cover Cap-plain for Clip-on brackets

RBC.66240.XX

Order Left & Right




Front Fixing Bracket - Standard

➤ Screw-on RBF.11240.NI

➤ Press-in RBF.12240.NI

➤ Expansion RBF.13240.NI

Order Left & Right



Front Fixing Bracket - Clip-on


➤ Screw-on RBF.16240.NI

➤ Press-in RBF.17240.NI

➤ Expansion RBF.18240.NI

Order Left & Right


Colour Code XX
Standard : 01 – R9010 White
Available Upon Request : 02 – R9001 Cream 21 – R7004 Grey 24 – R7037 Dust Grey

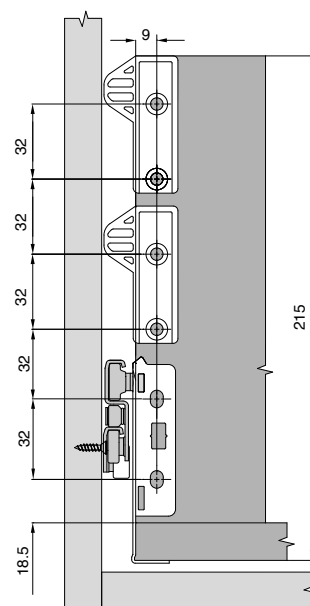


Cutting Dimensions for 16mm Chipboard

Standard Drawer

550mm

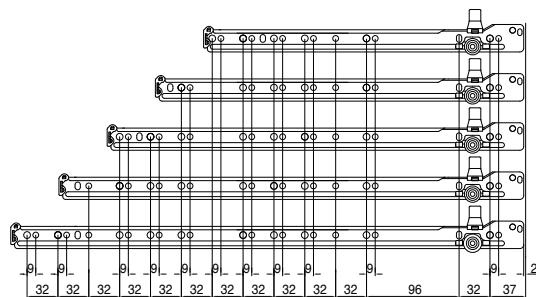


Bottom panel
 Width = Internal cabinet width - 31mm
 Length (wooden back) = Drawer length - 2mm
 Length (steel back) = Drawer length - 12mm



Technical drawing of a roof structure showing dimensions and pre-drill locations. The drawing includes a side view of the roof with a vertical height of 9 and a horizontal distance of 69. A detail view shows a pre-drill hole with dimensions 32 and 9. The text 'Pre-drill Ø5mm x 9mm deep' is present.



- Full extension
- Steel drawer side panels 85mm
- Epoxy coated
- Load capacity of 40kg
- Self closing feature
- Flexible 2-dimensional front adjustment
- Smooth rolling mechanism
- Double out-stop safety feature
- Locked-in position when fully extended
- Tilt adjustment of drawer front

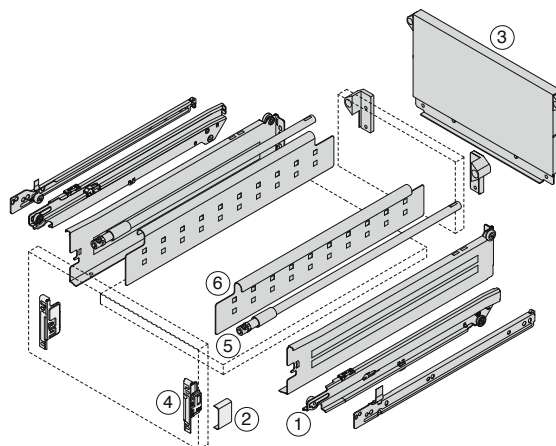


①	Cabinet Profile Drawer Side Left / Right :		⑤	Railing Set Left / Right :	
	Drawer Length	Screw-on Plug-in		Inclusive of Screw-on and Expansion railing adaptor	
	350mm	5020N.35.XX 5021N.35.XX		RRA-NE.331.XX	
	400mm	5020N.40.XX 5021N.40.XX		RRA-NE.381.XX	
	450mm	5020N.45.XX 5021N.45.XX		RRA-NE.431.XX	
	500mm	5020N.50.XX 5021N.50.XX		RRA-NE.481.XX	
	550mm	5020N.55.XX 5021N.55.XX		RRA-NE.531.XX	
②	Cover Cap-plain for Standard brackets		③	Steel Back	
	2X	RBC.61040.XX			
	Cover Cap-plain for Clip-on brackets		⑥	System MS	System HS
		RBC.66240.XX			
	Order Left & Right		Cabinet Width (16mm side panel)		
			400mm	RSB02R.336.XX	Available Upon Request
			450mm	RSB02R.386.XX	
			500mm	RSB02R.436.XX	
			550mm	RSB02R.486.XX	
			600mm	RSB02R.536.XX	
④ - steel nickel plated	Front Fixing Bracket - Standard		Side Extend		
	Screw-on	RBF.11240.NI	Drawer Length	System MS	System HS
	Press-in	RBF.12240.NI			
	Expansion	RBF.13240.NI	350mm	2X RSE064.350.XX	2X RSE128.350.XX
	Order Left & Right		400mm	2X RSE064.400.XX	2X RSE128.400.XX
	Front Fixing Bracket - Clip-on		450mm	2X RSE064.450.XX	2X RSE128.450.XX
	Screw-on	RBF.16240.NI	500mm	2X RSE064.500.XX	2X RSE128.500.XX
	Press-in	RBF.17240.NI	550mm	2X RSE064.550.XX	2X RSE128.550.XX
	Expansion	RBF.18240.NI			
	Order Left & Right				

Colour Code XX
Standard : 01 – R9010 White
Available Upon Request : 02 – R9001 Cream 21 – R7004 Grey 24 – R7037 Dust Grey


Spare Requirements and Front Installation Dimensions

System MS

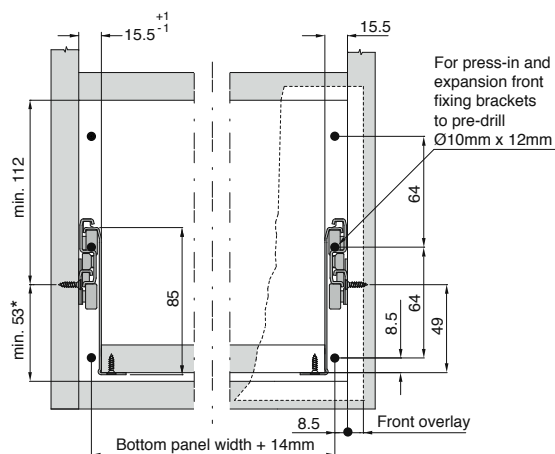


* Add 8mm when used with 201.000 Drawer Front Locking Piece.

System HS

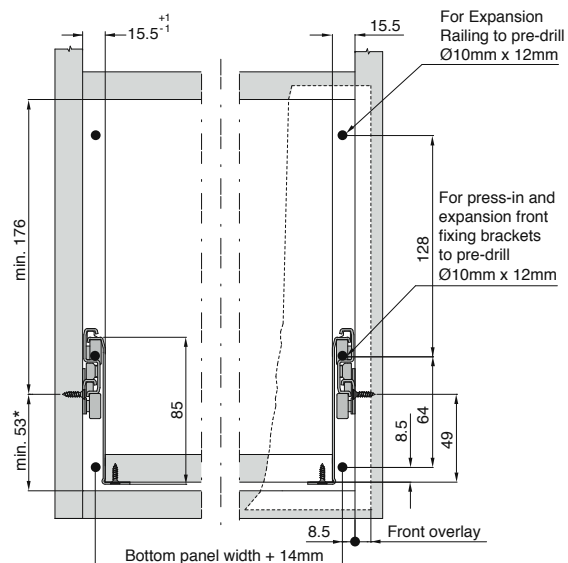


Back Installation Dimensions

System MS




System HS

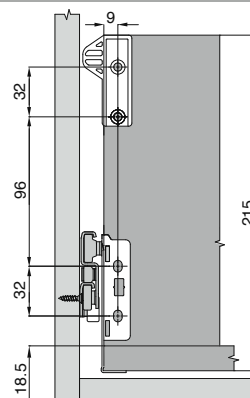

Cabinet Profile Screw Positions

Drawer Length


Min. Internal Cabinet Depth = Drawer Length + 8mm
Over Extension = 13mm

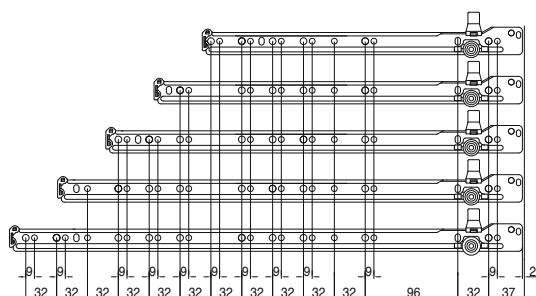

Standard Drawer

Back panel

Width = Internal cabinet width - 31mm
Height (System MS) = 135mm
Height (System HS) = 199mm




Bottom panel

Width = Internal cabinet width - 31mm
Length (wooden back) = Drawer length - 2mm
Length (steel back) = Drawer length - 12mm


Pre-drilling Dimensions of Bottom Panel for Plug-in

Drilling Template see page 52

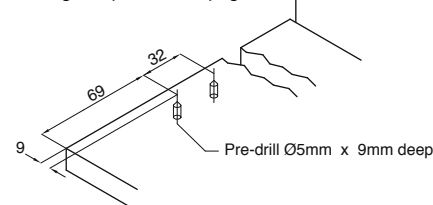




- Full extension
- Steel drawer side panels 85mm
- Epoxy coated
- Load capacity of 40kg
- Self closing feature
- Flexible 2-dimensional front adjustment
- Smooth rolling mechanism
- Double out-stop safety feature
- Locked-in position when fully extended

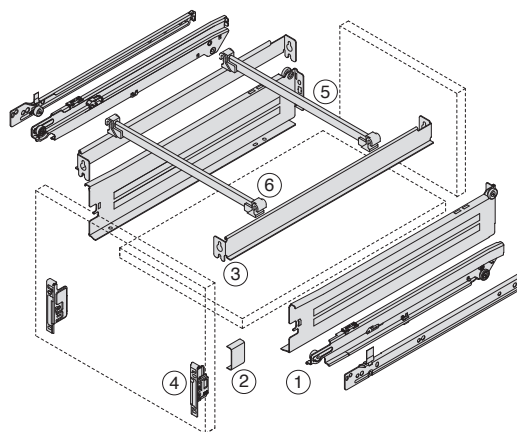

①	Cabinet Profile Drawer Side Left / Right :		③	Side Hanging Rail Left / Right :	
	Drawer Length	Screw-on Plug-in		Drawer Length	
	450mm	5020N.45.XX 5021N.45.XX		450mm	RMF.450.XX
	500mm	5020N.50.XX 5021N.50.XX		500mm	RMF.500.XX
	550mm	5020N.55.XX 5021N.55.XX		550mm	RMF.550.XX
					Order Left & Right
②	Cover Cap-plain for Standard brackets		⑤	Cross Hanging Rail	
	2X	RBC.61040.XX		RMF-C.475.XX	
	Cover Cap-plain for Clip-on brackets		⑥	Cross Hanging Rail Connector	
		RBC.66240.XX		RFC.8600.NA	
		Order Left & Right			
④ - steel nickel plated	Front Fixing Bracket - Standard		2X for each Cross Railing		
	Screw-on	RBF.11240.NI			
	Press-in	RBF.12240.NI			
	Expansion	RBF.13240.NI			
		Order Left & Right			
	Front Fixing Bracket - Clip-on				
	Screw-on	RBF.16240.NI			
	Press-in	RBF.17240.NI			
	Expansion	RBF.18240.NI			
		Order Left & Right			


Colour Code XX
Standard : 01 – R9010 White
Available Upon Request : 02 – R9001 Cream 21 – R7004 Grey 24 – R7037 Dust Grey

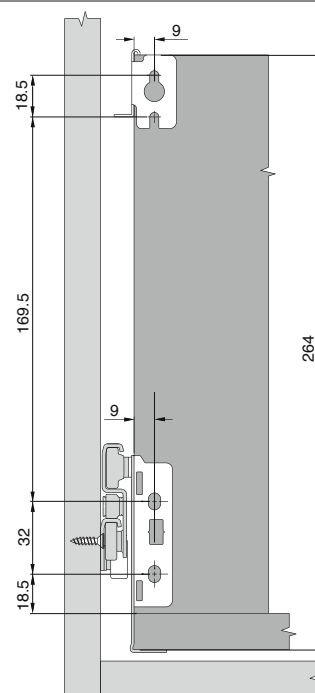


Cutting Dimensions for 16mm Chipboard

Min. Internal Cabinet Depth = Drawer Length + 8mm
Over Extension = 13mm

550mm

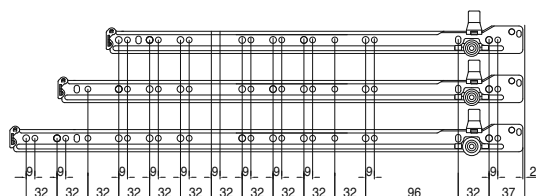


Back panel _____
Width = Internal cabinet width - 31mm
Height = 248mm




Bottom panel
Width = Internal cabinet width - 31mm
Length (wooden back) = Drawer length - 2mm

Drilling Template see page 52

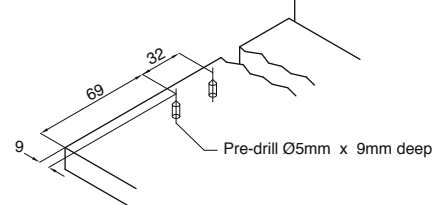

DIN A4 Along Drawer Length

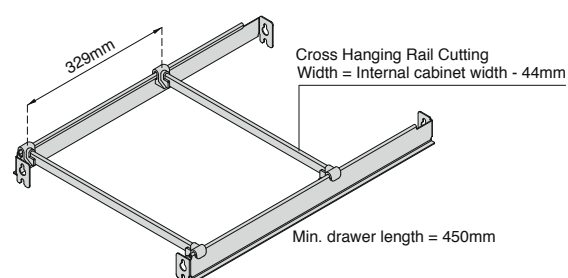


IMPAZ

Divider Railing

IMPAZ




- Single extension and full extension
- Steel drawer side panels 85mm
- Epoxy coated
- Load capacity of 30kg (single) and 40kg (full)
- Self closing feature
- Flexible 2-dimensional front adjustment
- Smooth rolling mechanism
- Double out-stop safety feature
- Locked-in position when fully extended
- Tilt adjustment of drawer front

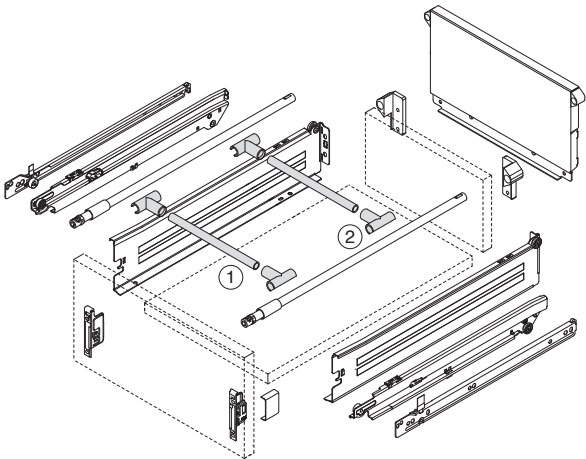

①	Cross Railing	②	Cross Railing Connector
			
Cabinet Width (16mm side panel)		2X for each Cross Railing	RRC.7200.XX
275mm	RRF.201.XX		
300mm	RRF.226.XX		
350mm	RRF.276.XX		
400mm	RRF.326.XX		
450mm	RRF.376.XX		
500mm	RRF.426.XX		
550mm	RRF.476.XX		
600mm	RRF.526.XX		
Length for cutting	RRF.1109.XX		

Cutting Dimensions for Cross Railing



Width = Internal cabinet width - 41mm

Colour Code XX
Standard : 01 – R9010 White
Available Upon Request : 02 – R9001 Cream 21 – R7004 Grey 24 – R7037 Dust Grey


IMPAZ

Divider Railing - Side Extend




IMPAZ

- Single extension and full extension
- Steel drawer side panels 85mm
- Epoxy coated
- Load capacity of 30kg (single) and 40kg (full)
- Self closing feature
- Flexible 2-dimensional front adjustment
- Smooth rolling mechanism
- Double out-stop safety feature
- Locked-in position when fully extended
- Tilt adjustment of drawer front

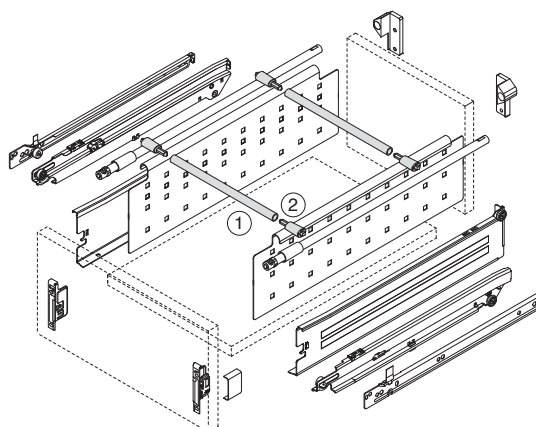

①	Cross Railing	②	Cross Railing Connector
			
Cabinet Width (16mm side panel)		2X for each Cross Railing	RRC.8500.XX
400mm	RRF.297.XX		
450mm	RRF.347.XX		
500mm	RRF.397.XX		
550mm	RRF.447.XX		
600mm	RRF.497.XX		
900mm	RRF.797.XX		
1000mm	RRF.897.XX		
1200mm	RRF.1097.XX		
Length for cutting	RRF.1109.XX		

Cutting Dimensions for Cross Railing




Width = Internal cabinet width - 70 mm


Colour Code XX
Standard : 01 – R9010 White
Available Upon Request : 02 – R9001 Cream 21 – R7004 Grey 24 – R7037 Dust Grey

IMPAZ

Full Extension Kit

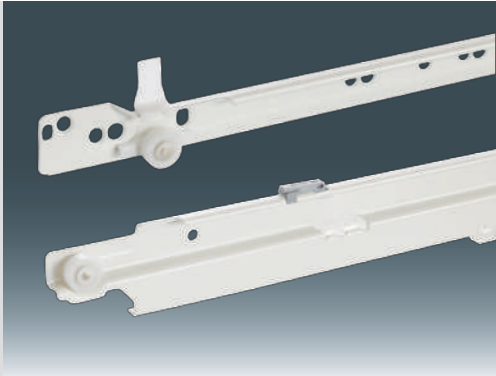


- Quick and easy installation
- Interchangeability for IMPAZ 4020, 4320, 4620 & 4920 single extension to full extension
- Load capacity of 40kg
- Epoxy coated
- Smooth rolling mechanism
- Self closing feature
- Double out-stop safety features
- Elastic shock absorbers to minimize noise level

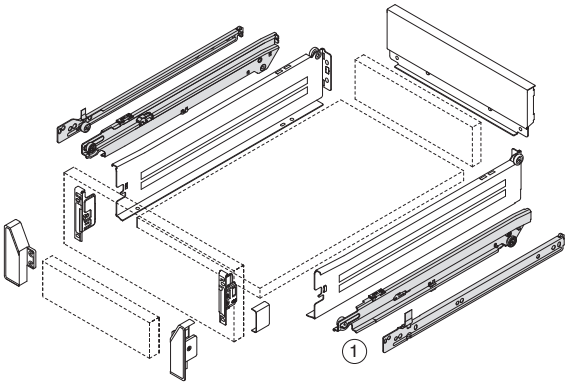

	Cabinet Profile Drawer Side Left / Right :
Drawer Length	
270mm	5000N.27.XX
350mm	5000N.35.XX
400mm	5000N.40.XX
450mm	5000N.45.XX
500mm	5000N.50.XX
550mm	5000N.55.XX


Colour Code XX
 Standard : 01 – R9010 White
 Available Upon Request : 02 – R9001 Cream 21 – R7004 Grey 24 – R7037 Dust Grey

Spare Requirements and Front Installation Dimensions

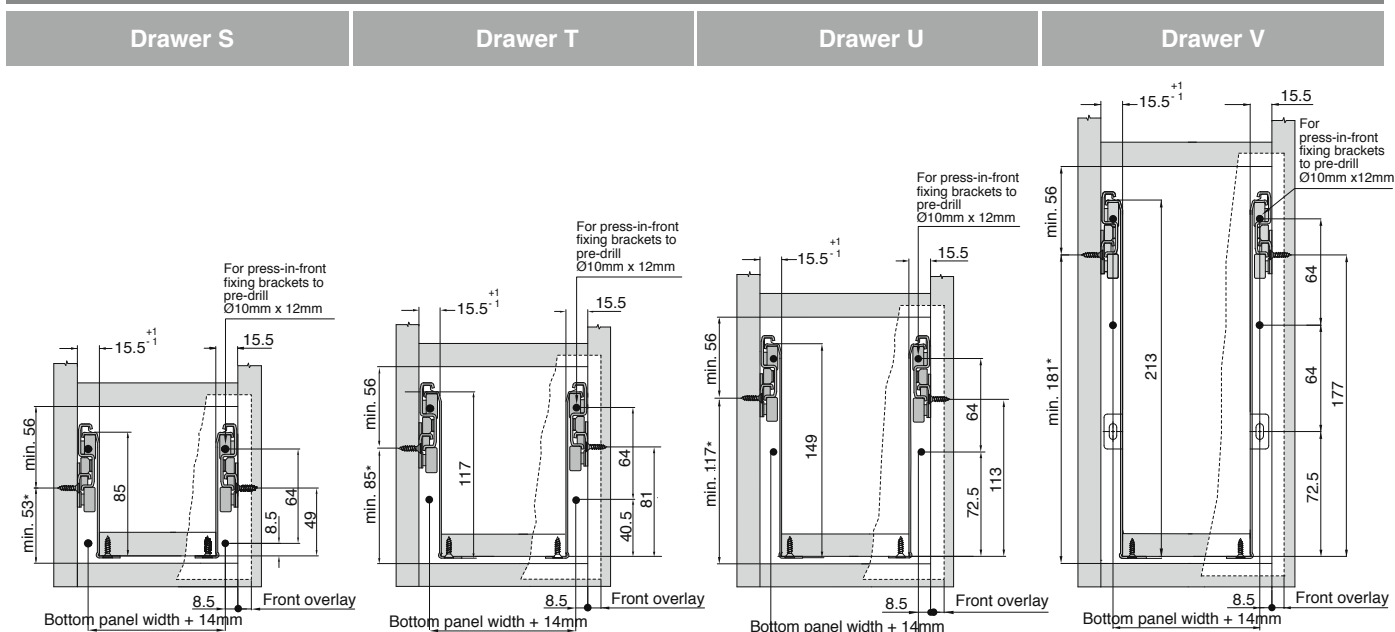

* Add 8mm when used with 201.000 Drawer Front Locking Piece.

Back Installation Dimensions

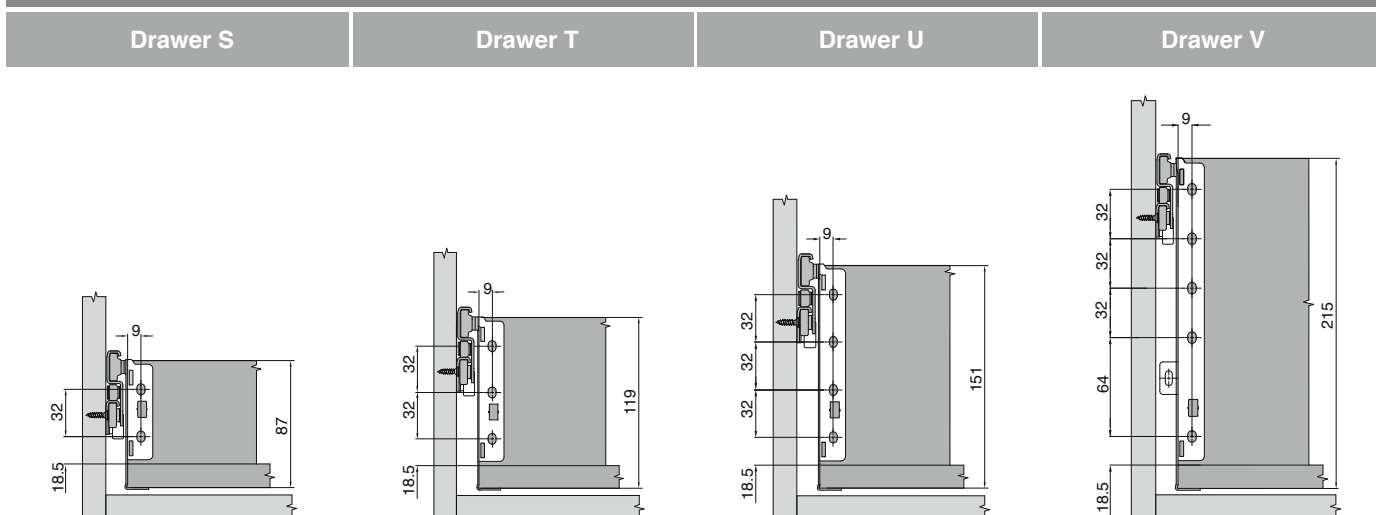

Cabinet Profile Screw Positions

Drawer Length

Min. Internal Cabinet Depth = Drawer Length + 8mm
Over Extension = 13mm

270mm


350mm

400mm

450mm

500mm


550mm

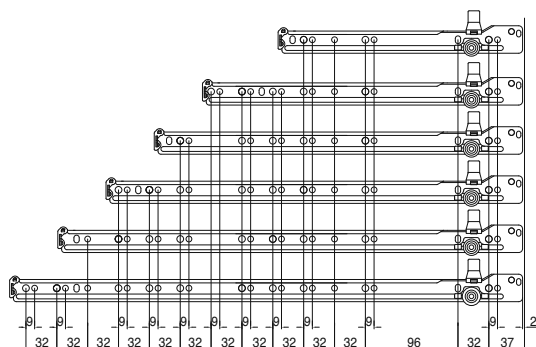

IMPAZ


Larder Unit

IMPAZ

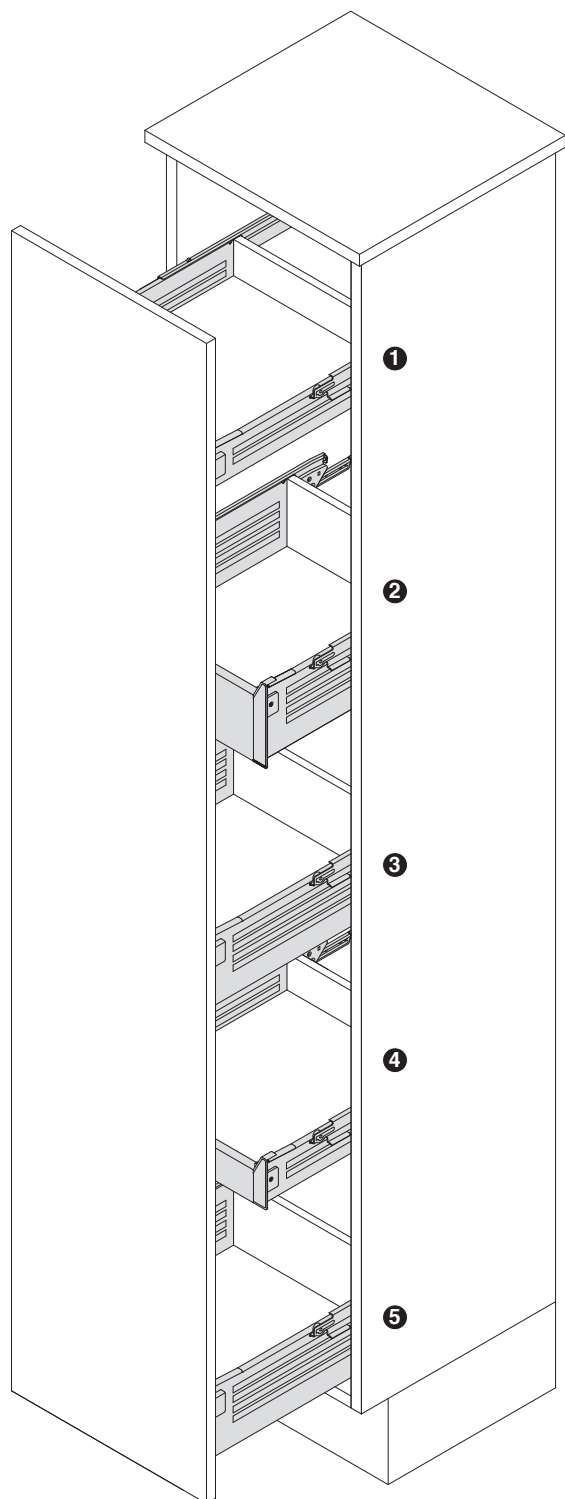


❶	Standard Drawer S connected to front	See page 22
❷	Inner Drawer U	See page 26
❸	Standard Drawer U connected to front	See page 26
❹	Inner Drawer S	See page 22
❺	Standard Drawer U connected to front	See page 26

Cabinet Width - 300 / 400mm

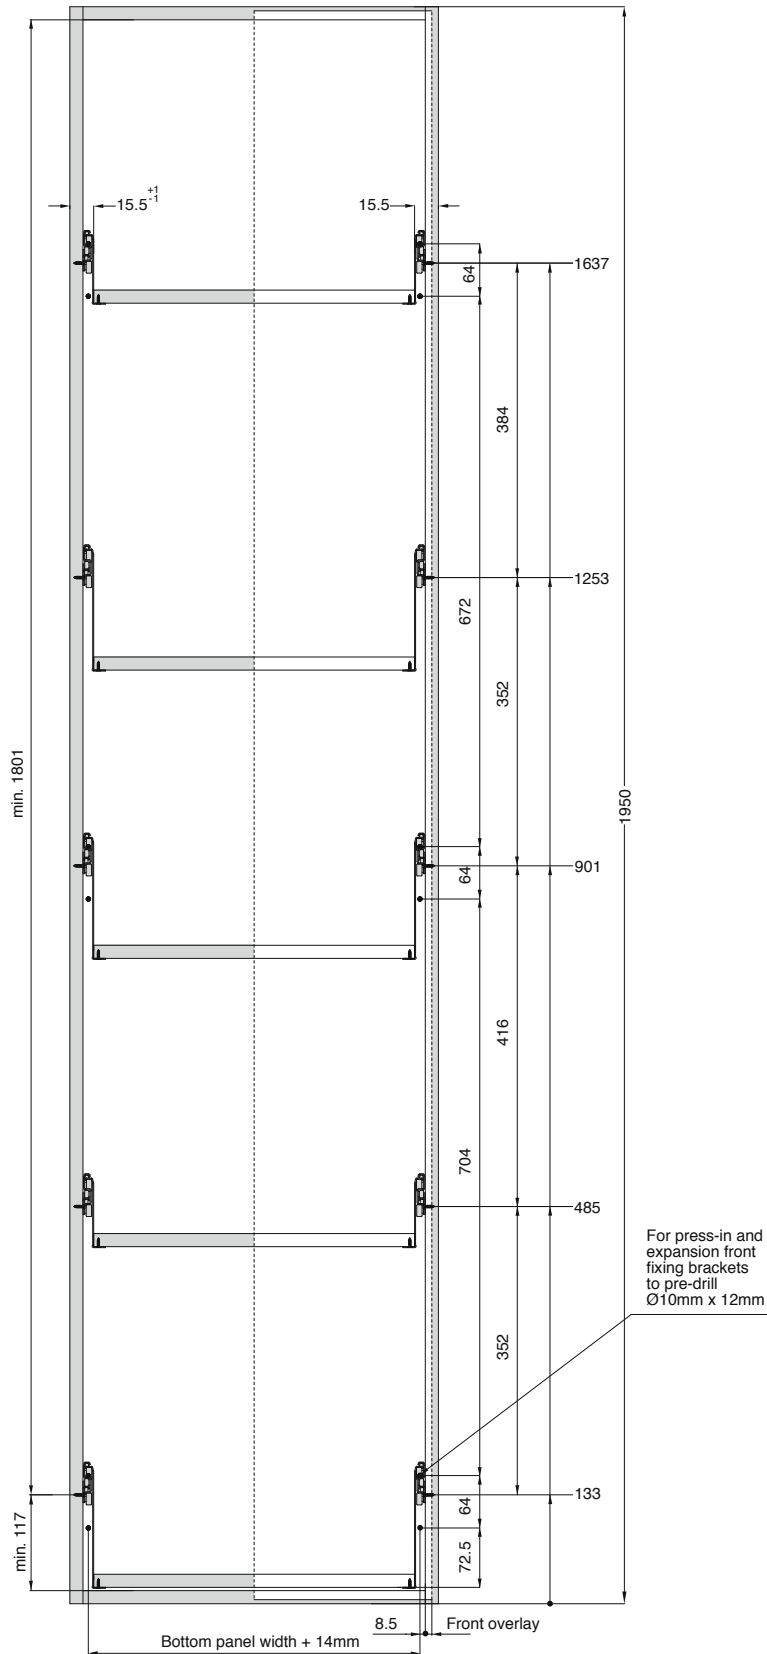


IMPAPZ

Accessories




Chipboard Screws

Length	
15.0mm	350.150
17.0mm	350.170




Special Euro Screws

Length	
10.0mm	361.100
11.5mm	361.115
13.0mm	361.130
14.5mm	361.145




Euro Screws

Length	
10.0mm	360.100
11.5mm	360.115
13.0mm	360.130
14.5mm	360.145
20.0mm	360.200




Dowels

501.115




Standard Drawer Front Locking Piece

Included 2 pan head screws 201.000



Inner Drawer Locking Piece

206.000







Impaz Sylent

Lite Grey

RSC.2530

Note :


- Drawer using only one RSC.2530 must install it on the right side of the cabinet.
- Drawer widths 800mm and above requires a RSC.2530 to be installed on each side of the cabinet.
- Add 5mm to mounting position of cabinet profile for space clearance of activator.
- All measurements are quoted in millimeter.

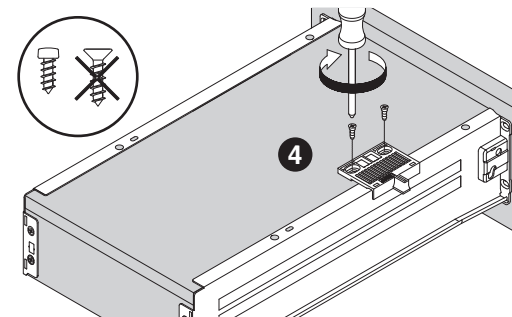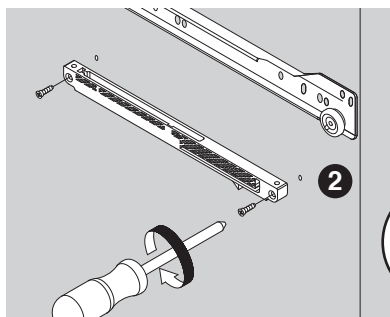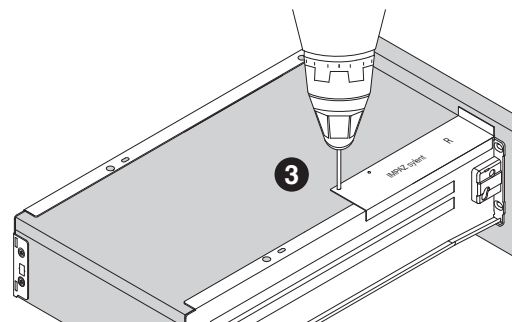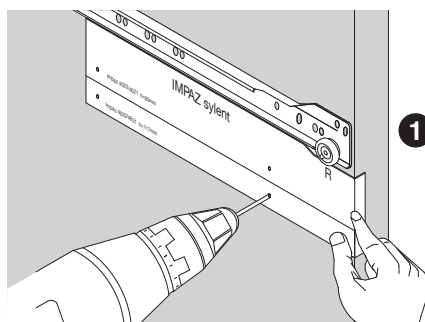

Single Extension

Fixing onto cabinet


- A Chipboard Screws
Ø4 x 15
- B Euro Screws
Article No. 360.145
- C Chipboard Screws
Article No. 350.150
For high loading

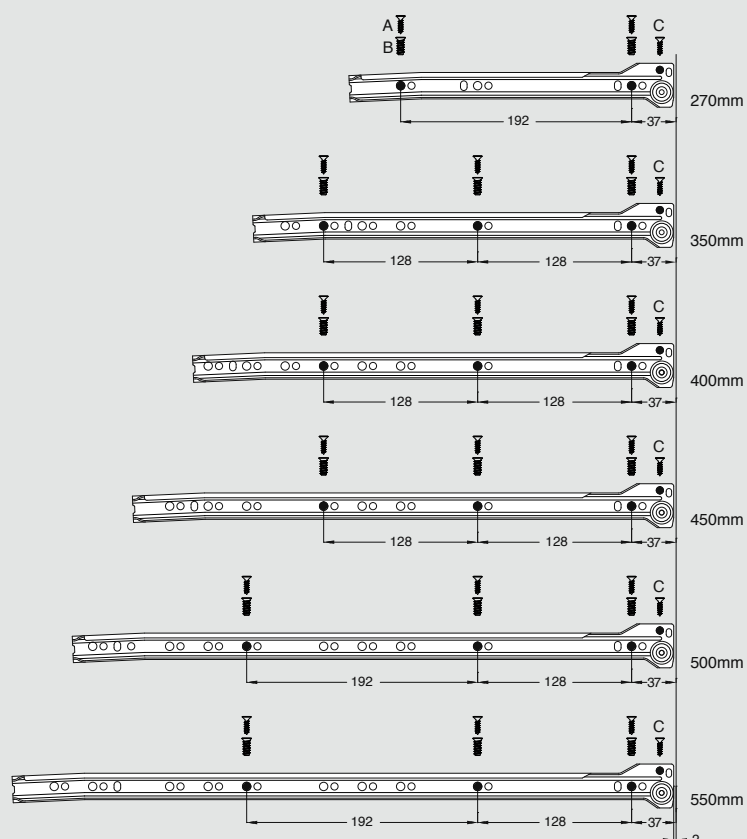

Full Extension

Fixing onto cabinet

- A Chipboard Screws
Ø4 x 15
- B Euro Screws
Article No. 360.145
- C Chipboard Screws
Article No. 350.150

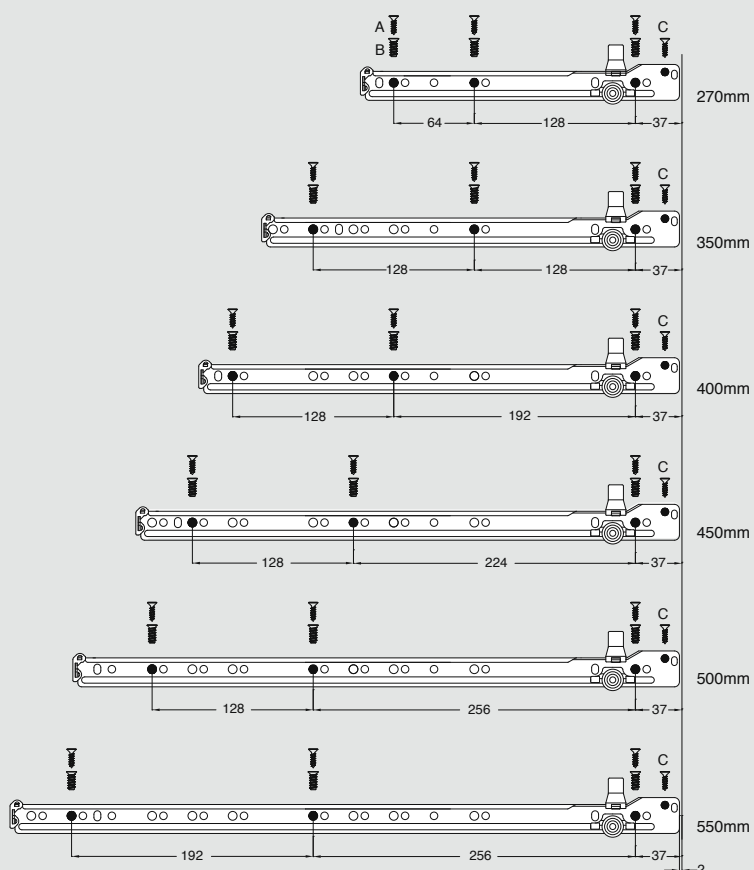


IMPAZ

Assembly, Removal and Adjustment


Drawer Assembly - Wooden Back

Screw-on

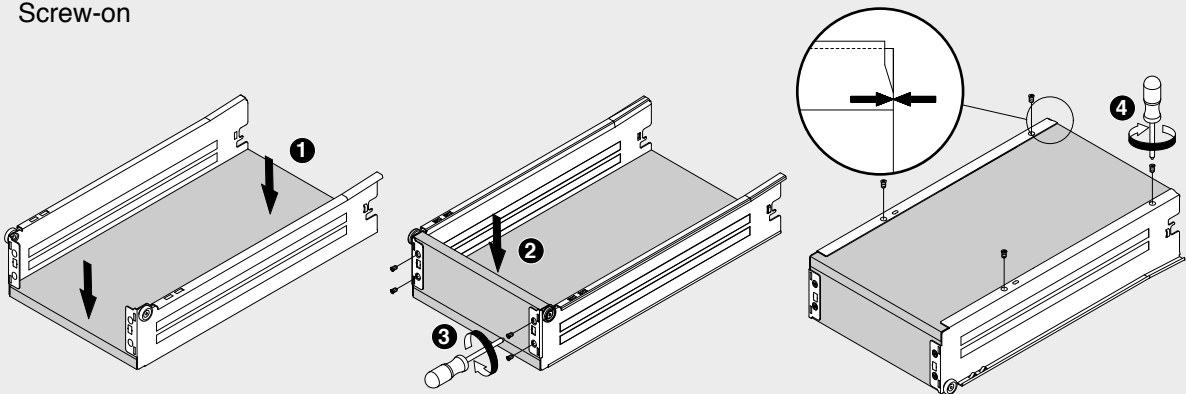


Drawer Assembly - Wooden Back

Plug-in

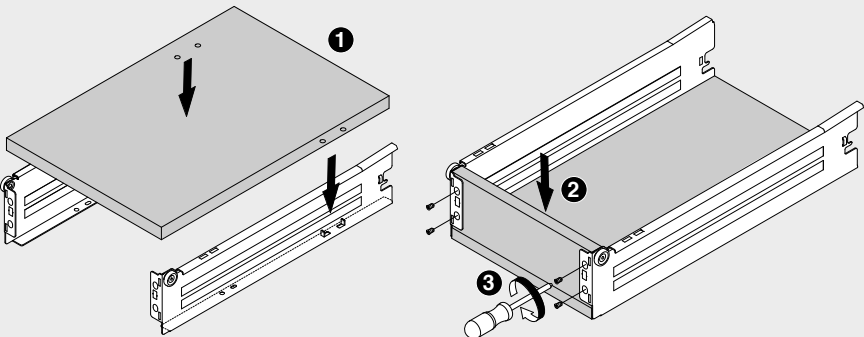


Drawer Assembly - Steel Back


Plug-in

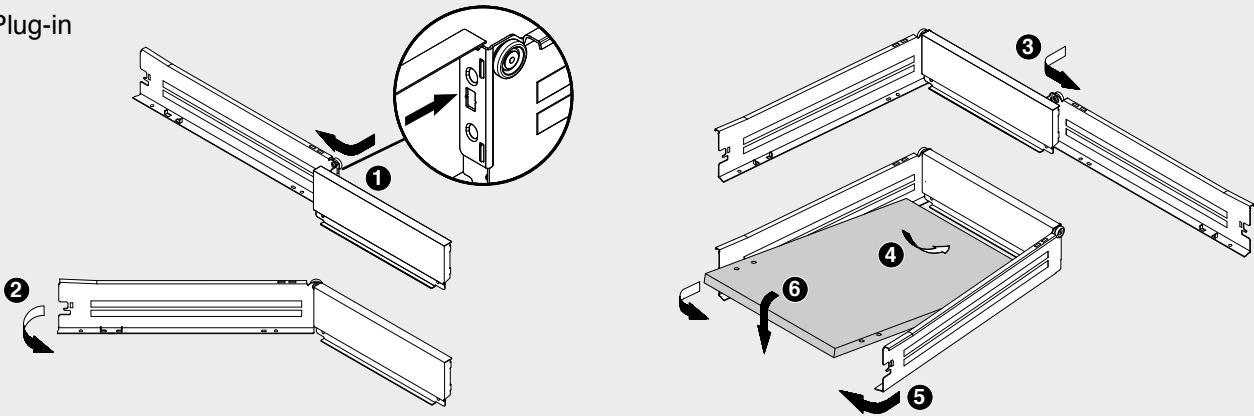


Drawer Front Assembly and Removal - Standard Bracket

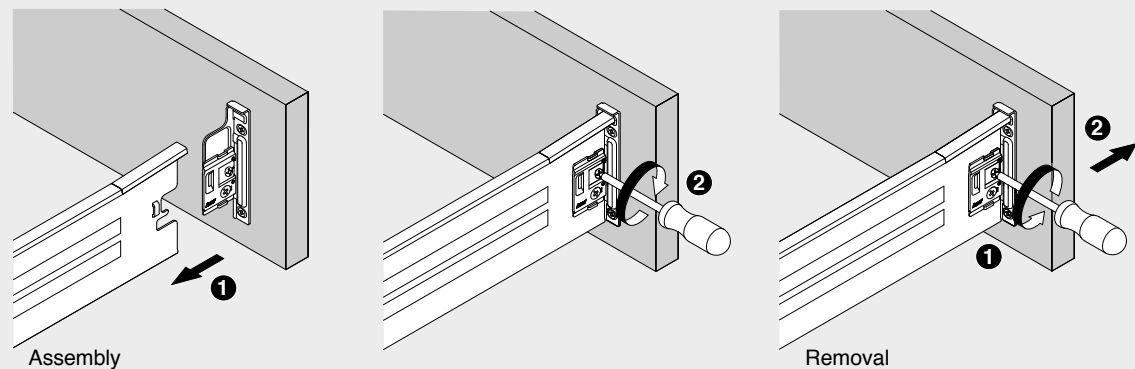


Drawer Front Assembly and Removal - Clip-on Bracket



Assembly




'Click'

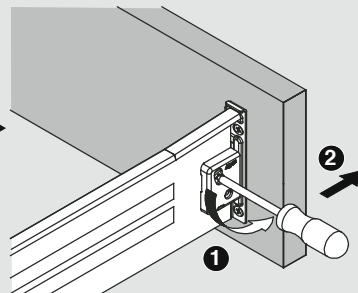


Removal

Inner Drawer Assembly and Removal




Assembly






Removal

Railing Assembly


Screw-on



Expansion




Drawer Insertion - Single Extension

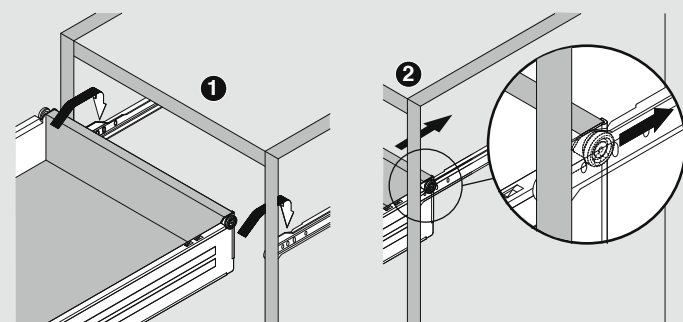


IMPAZ

Assembly, Removal and Adjustment


Drawer Insertion - Full Extension

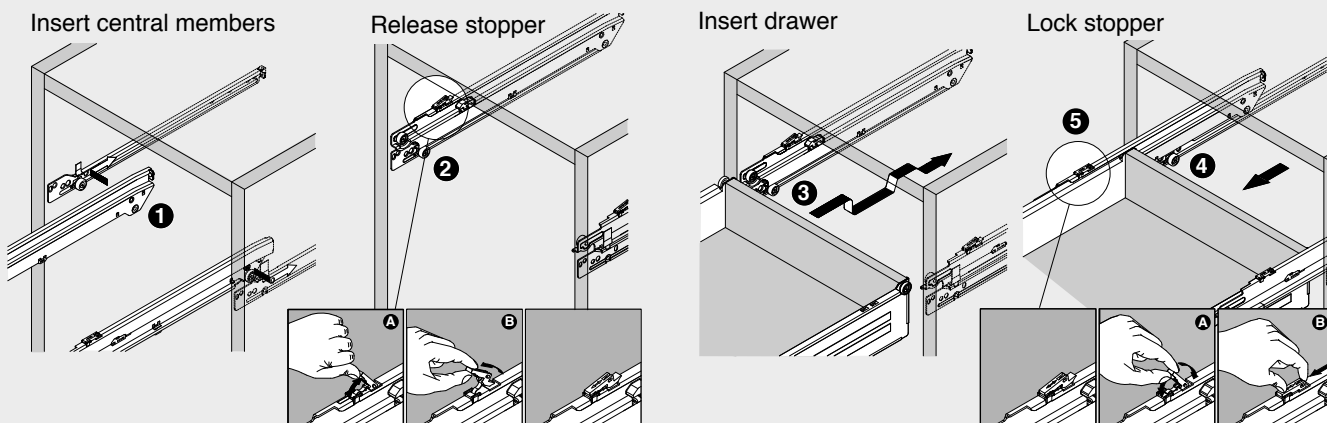


Drawer Removal - Full Extension

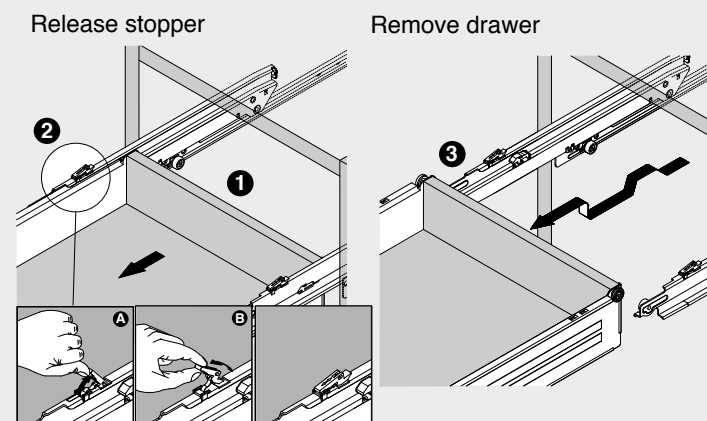


Drawer Front Side Adjustment - Standard Bracket

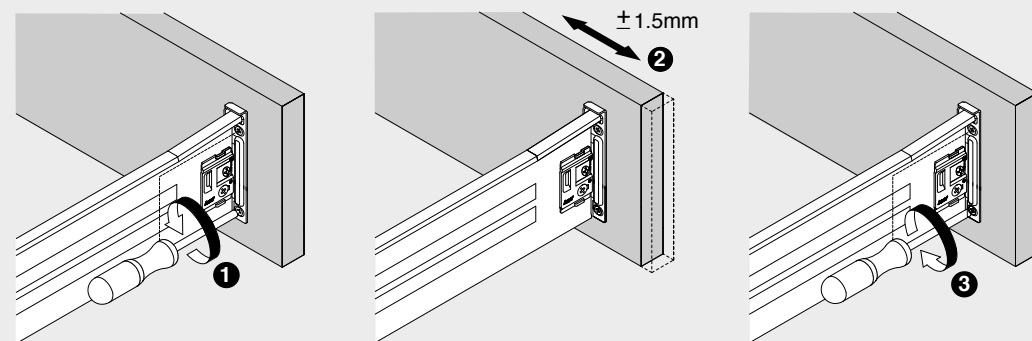


Drawer Front Side Adjustment - Clip-on Bracket

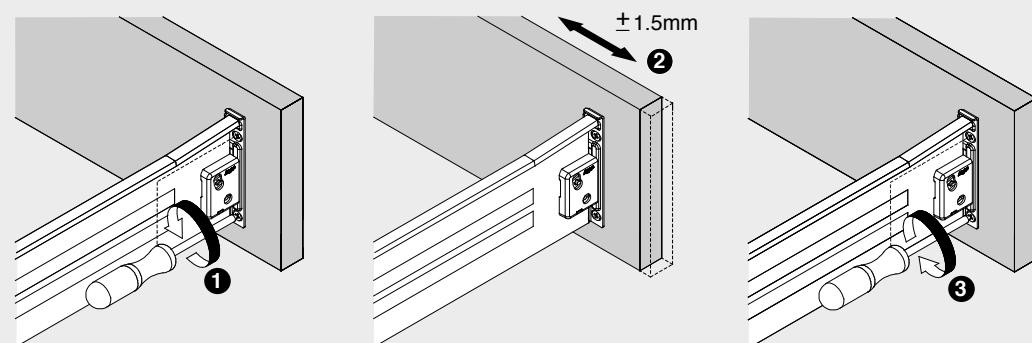


Drawer Front - Height Adjustment - Standard Bracket

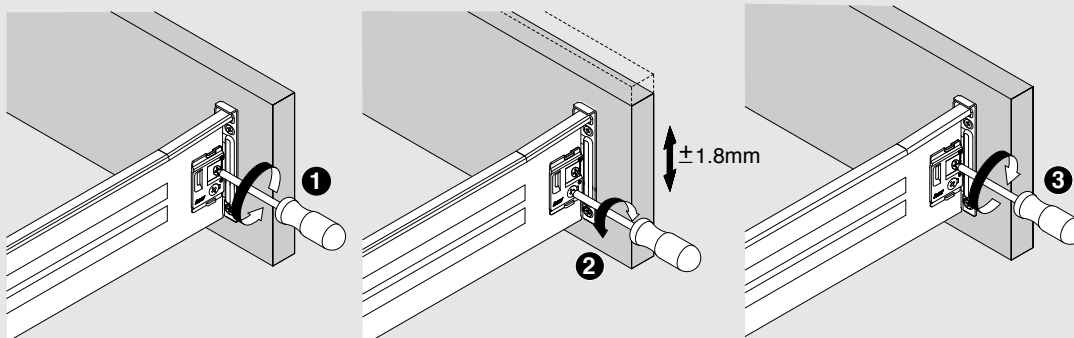


Drawer Front - Height Adjustment - Clip-on Bracket

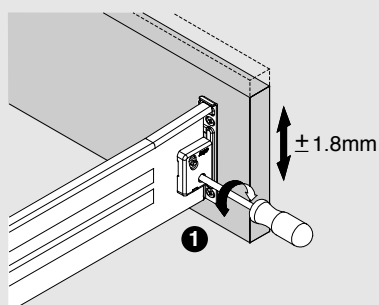


Drawer Front - Tilt Adjustment



Drawer Front Locking Piece

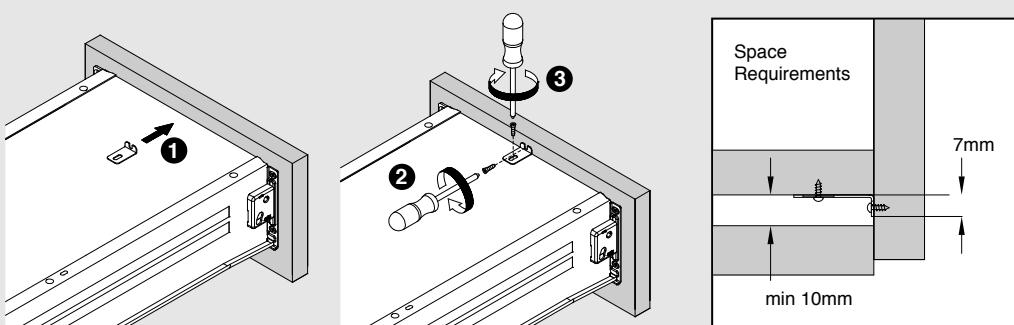


Drawer Locking Pin For Central Locking

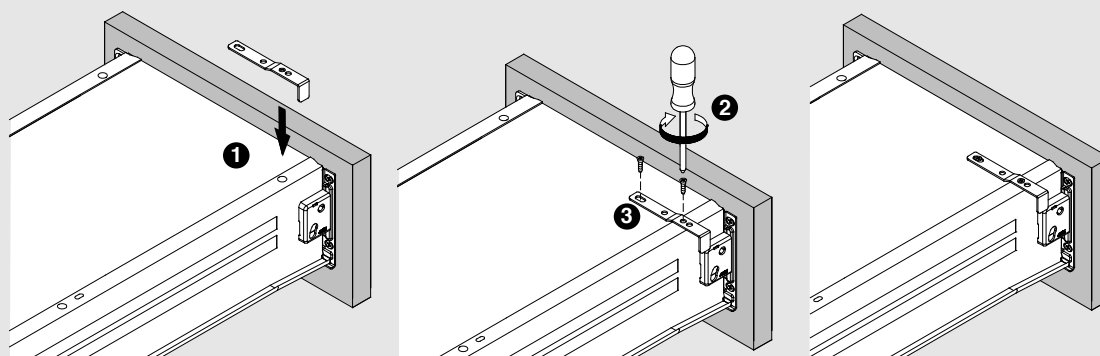


IMPAZ

Assembly, Removal and Adjustment


Side Extend Assembly

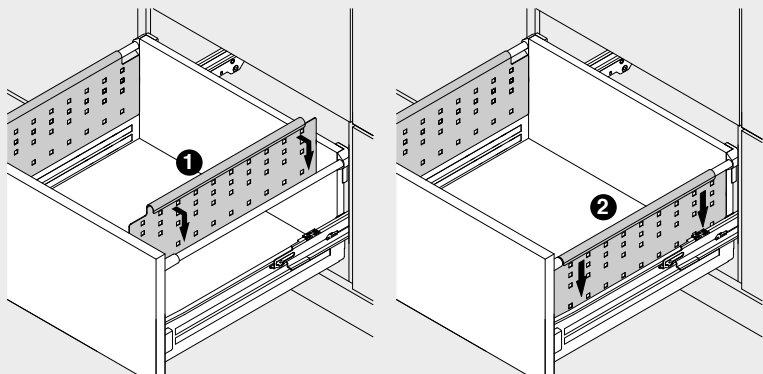

Divider Railing (Side Extend) Assembly

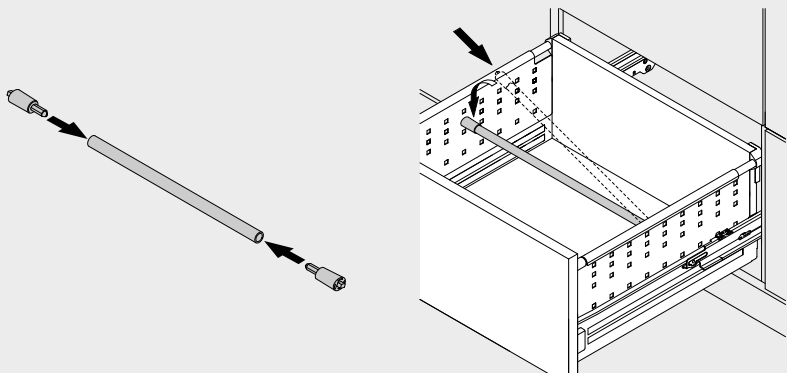

Divider Railing / Filling Cross Hanging Rail Assembly

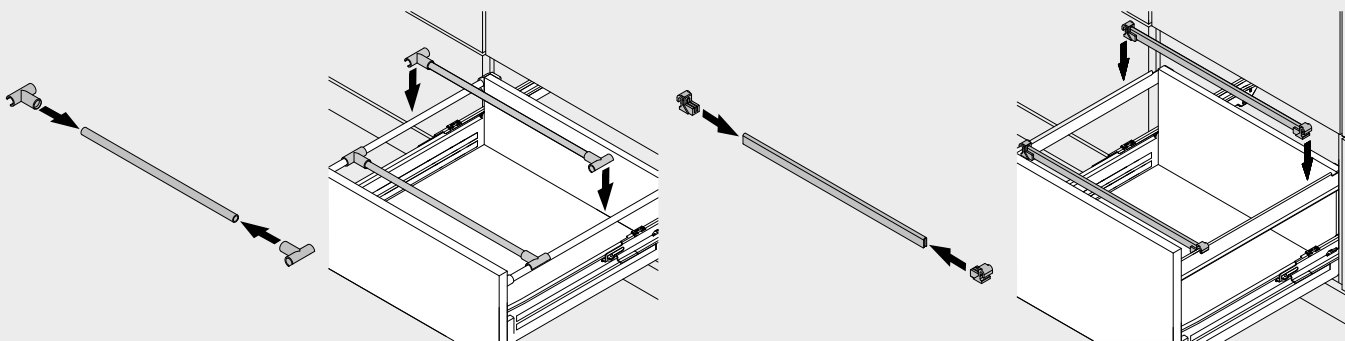





Drawer Front Marking Jigs Left / Right :

Article No.

RMD.91040.25

Included 6 Marking pins

Application

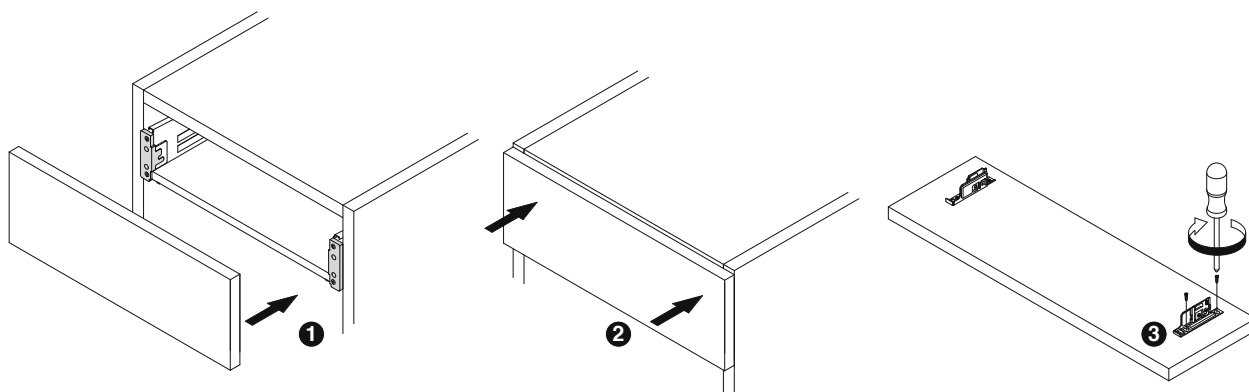

Railing Marking Template

For marking single and double railing

For Standard Brackets

Article No.

RMD.92240N.25

RBF.11240 / RBF.12240 / RBF.13240


For Clip-on Brackets

Article No.

RMD.92240N.25



RBF.16240 / RBF.17240 / RBF.18240

Application

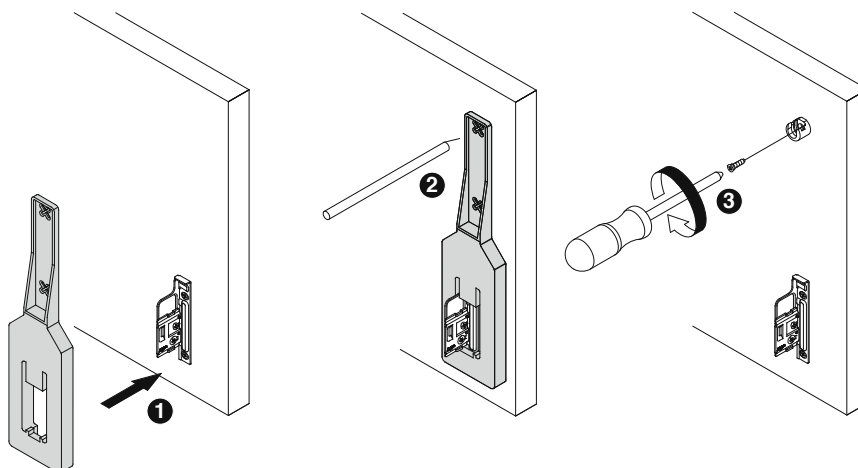

IMPAZ

Drilling Jig



Drilling Template

For drilling or marking bottom panel and back panel



Article No.

RMD.93300.25





Included one Ø5mm marking pin and one Ø5mm stop collar

Application

Bottom panel

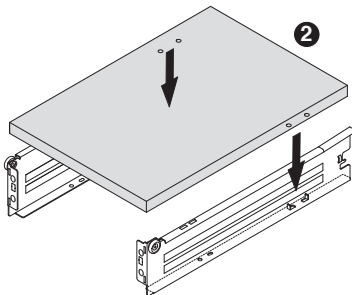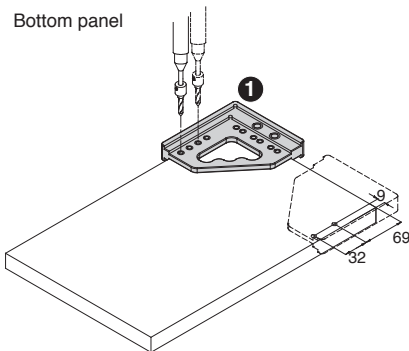

Back panel

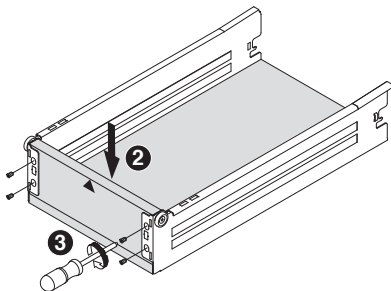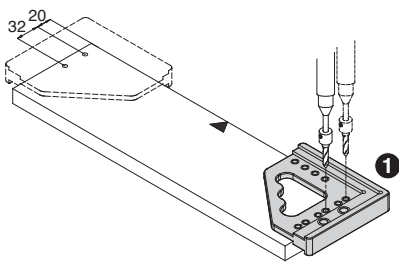

Insertion Ram

For insertion of press-in front fixing bracket

Machine Insertion Ram

for Bracket RBF.12240 / RBF.17240

Article No.

RME.95540.25

Hand Insertion Ram

for Bracket RBF.12240 / RBF.17240

Article No.


RME.95541.25

Assembly of drawers

Article No.


RMM.97040.AL

IMPAZ

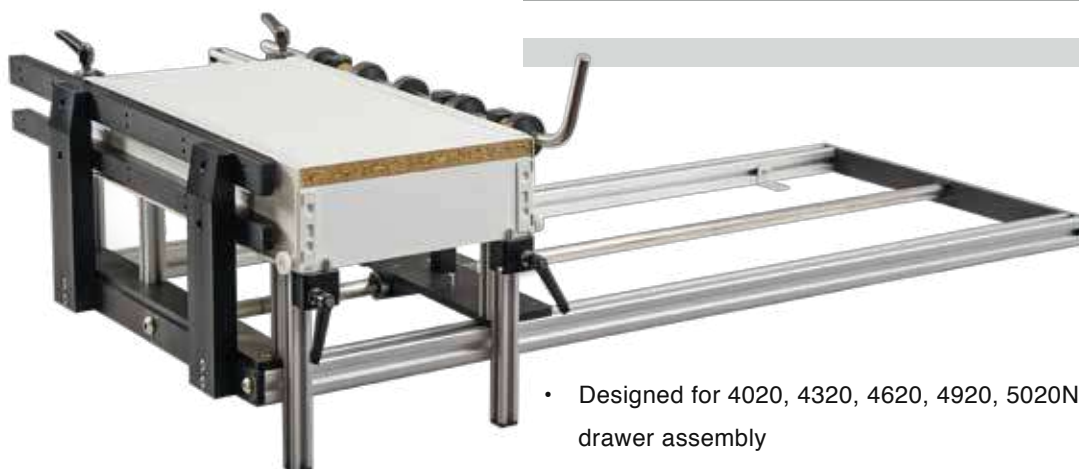


- Designed for 4020, 4320, 4620, 4920, 5020N, 5320N, 5620N & 5920N drawer assembly
- Drawer side lengths 250 to 550 mm
- Cabinet widths 300 to 900 mm
- Maximum back panel height of 199mm


Application

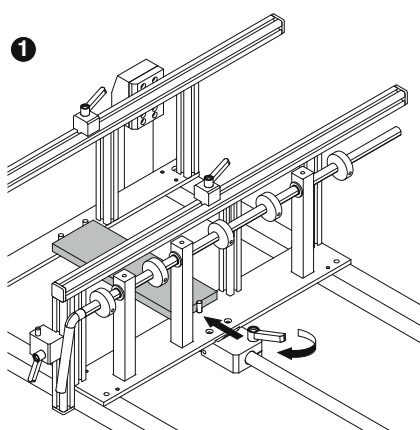


Setting desired drawer length and width.

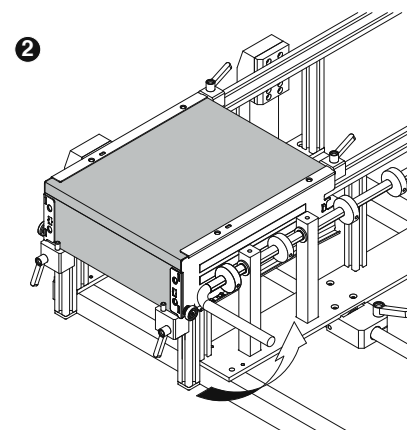

Insert back and bottom panels. Slide in drawer sides. Activate locking clamps to hold drawer together.

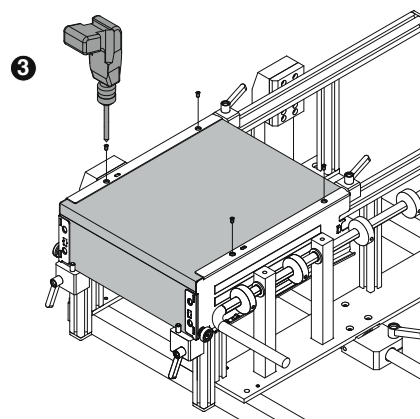

Secure bottom panel using screws.

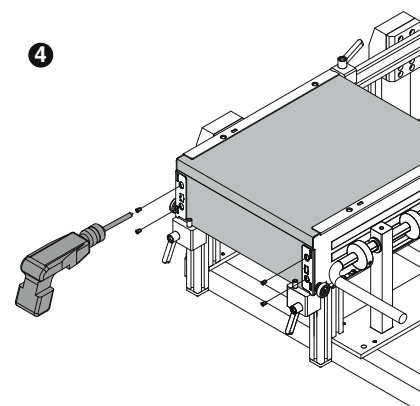

Secure back panel using screws.

Aksesori Setia Sdn.Bhd.

Company No. 326521-U

Plot 32, Lengkok Rishah 1,
Kawasan Perindustrian Silibin,
30100 Ipoh, Perak, Malaysia.

Tel : (60) 5 - 527 6055

Fax : (60) 5 - 527 6063

E-mail : info@harn.com

www.harn.com

harn[®]



harn[®] *moving innovations* ▶

RITMA  **cube**

product
assembly
installation

Drawer lengths to your requirements

270 mm - 650 mm

Drawer N

harn

Drawer S


harn

Drawer T


harn

270 mm


650 mm

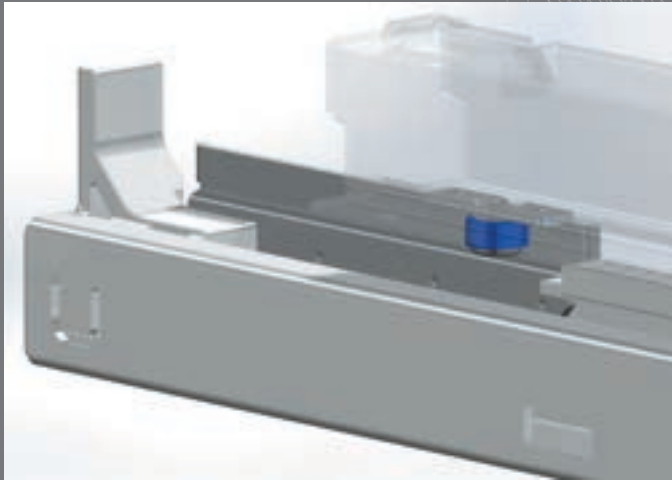

The Anti-tilt mechanism prevents the drawer from skewing during the pull out action.

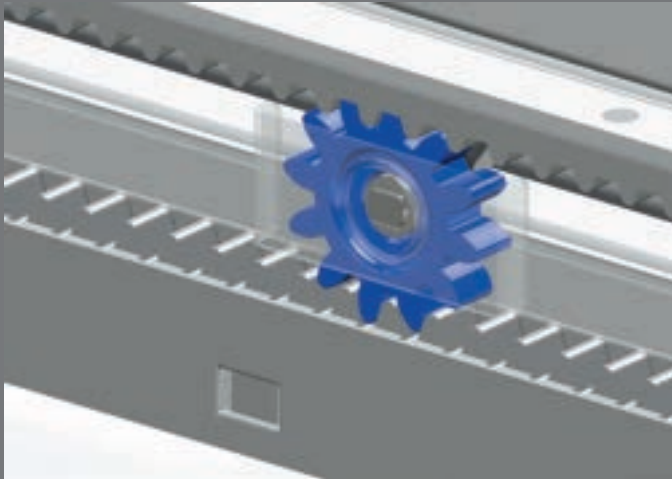



The cabinet profile's synchronise mechanism together with nests of low-friction roller bearings offer smooth and quiet sliding action.

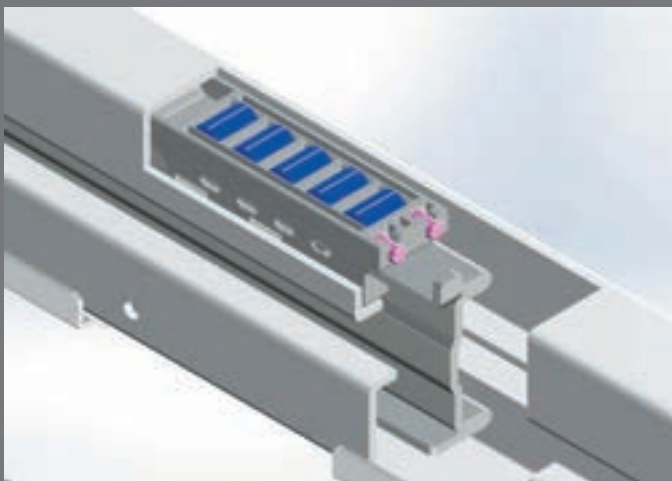

The I-Channel with nests of roller bearings offer smoother and quieter sliding performance on a full load.


Table of content



	Standard Drawer	Inner Drawer
Drawer N Drawer Height 68mm	 6	
Drawer S Drawer Height 83mm	 8	 10
Drawer T Drawer Height 115mm	 12	 14
Drawer - MS Rectangular Rail Drawer Height 140mm	 16	
Drawer - KS Rectangular Rail Drawer Height 172mm	 18	
Drawer - HS Rectangular Rail with Side Panel Drawer Height 204mm	 20	 22
Drawer - HS with Double Rectangular Rail Drawer Height 204mm	 24	 26
Drawer - HT Rectangular Rail Drawer Height 204mm	 28	 30
Drawer - MS Round Rail Drawer Height 140mm	 32	
Drawer - KS Round Rail Drawer Height 172mm	 34	

	Standard Drawer	Inner Drawer
Drawer - HS Round Rail with Side Extend Drawer Height 204mm	 36	 38
Drawer - HS with Double Round Rail Drawer Height 204mm	 40	 42
Organise^{plus}	 44	
Sink Cabinet Drawer - S Drawer Height 83mm	 54	
Sink Cabinet Drawer - HS Drawer Height 204mm	 56	
Larder Unit with Door		 58
Steel Back		60
Accessories		61
Cabinet Profile Fixing Position		62
Assembly, Removal and Adjustment		63
Marking Jigs		69
Knock In Tool		70





- Roller bearing concealed runners
- Full extension with synchro control
- Steel drawer side **68mm**
- Load capacity of **35kg**
- Quick assembly
- Flexible 2-dimensional front adjustment
- **Sylent** integrated cushioning system
- Integrated lateral stabiliser

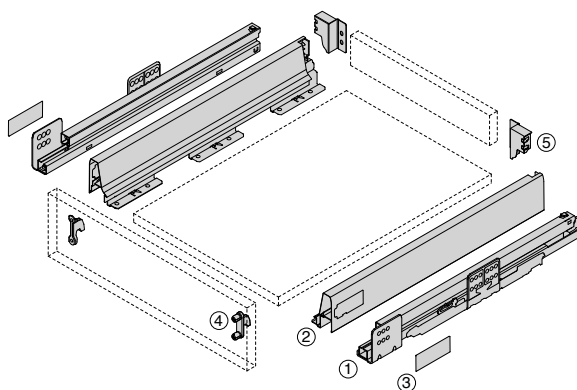

① 	Cabinet Profile Left / Right : galvanised	② 	Drawer Side Left / Right :
Drawer Length	35kg Left/Right to be ordered separately		Left/Right to be ordered separately
400mm	TM13S.40.GI		TD21.40.XX
450mm	TM13S.45.GI		TD21.45.XX
500mm	TM13S.50.GI		TD21.50.XX
550mm	TM13S.55.GI		TD21.55.XX
③ 	Cover Cap-harn Logo 2X RBC.62230-L1.XX		
④ 	Front Fixing Bracket  Screw-on 2X RBF.21130.GI  Press-in 2X RBF.22130.GI  Expansion 2X RBF.23130.GI		
⑤ 	Rear Fixing Bracket Left / Right : Left/Right to be ordered separately RBR.72130.XX Steel Back n/a		

Space Requirements and Front Installation Dimensions

Back Installation Dimensions

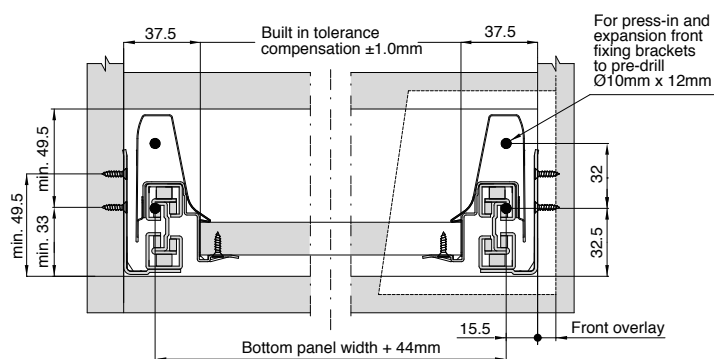

Cabinet Profile Screw Positions

TM13S


Drawer Length

Min. internal cabinet depth = drawer length + 3 mm
Actual loss of extension = 0 mm

400 mm

450 mm


500, 550 mm

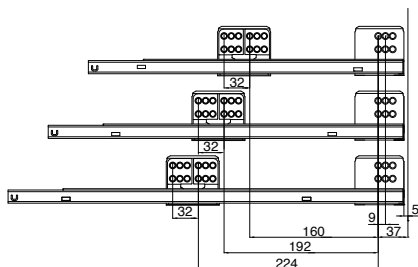

Cutting Dimensions for 16mm Chipboard

Back panel

Width = internal cabinet width - 87mm
Height = 69mm

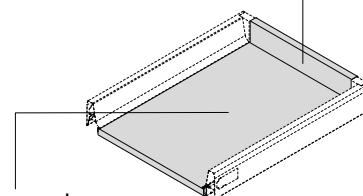




Bottom panel

Width = Internal cabinet width - 75mm
Length (Wooden Back) = drawer length - 24 mm
Length (Steel Back) = drawer length - 22 mm





- Roller bearing concealed runners
- Full extension with synchro control
- Steel drawer side **83mm**
- Load capacity of **35kg** or **60kg**
- Quick assembly
- Flexible 2-dimensional front adjustment
- **Sylent** integrated cushioning system
- Integrated lateral stabiliser

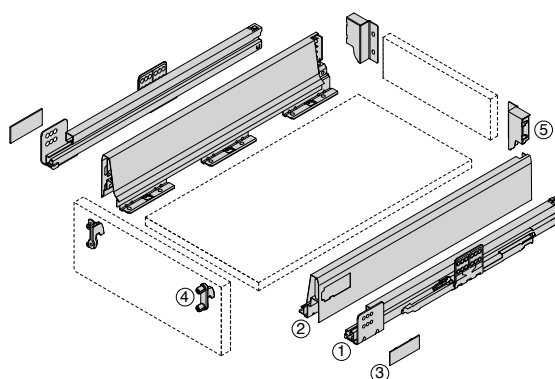

① 	Cabinet Profile Left / Right : galvanised		② 	Drawer Side Left / Right :
Drawer Length	35kg	60kg		
	Left/Right to be ordered separately		Left/Right to be ordered separately	
270mm	TM13S.27.GI		TD23.27.XX	
300mm	TM13S.30.GI		TD23.30.XX	
350mm	TM13S.35.GI		TD23.35.XX	
400mm	TM13S.40.GI	TM16S.40.GI	TD23.40.XX	
450mm	TM13S.45.GI	TM16S.45.GI	TD23.45.XX	
500mm	TM13S.50.GI	TM16S.50.GI	TD23.50.XX	
550mm	TM13S.55.GI	TM16S.55.GI	TD23.55.XX	
600mm		TM16S.60.GI	TD23.60.XX	
650mm		TM16S.65.GI	TD23.65.XX	
③ 	Cover Cap-harn Logo			
	2X	RBC.62230-L1.XX		
④ 	Front Fixing Bracket			
	 Screw-on	2X	RBF.21130.GI	
	 Press-in	2X	RBF.22130.GI	
	 Expansion	2X	RBF.23130.GI	
⑤ 	Rear Fixing Bracket Left / Right :			
	Left/Right to be ordered separately			
		RBR.72330.XX		
	Steel Back	see page 60		

Space Requirements and Front Installation Dimensions

Back Installation Dimensions

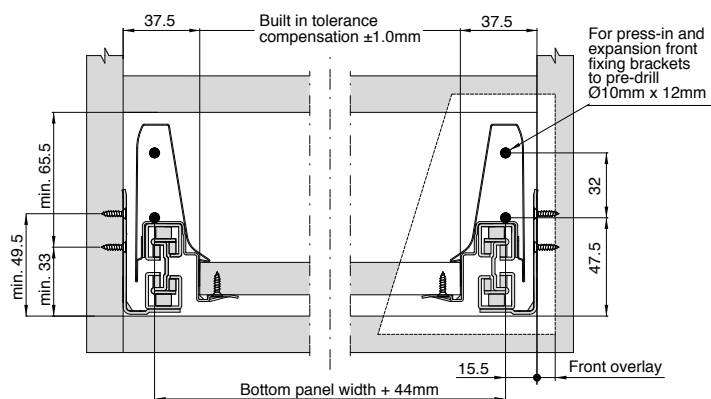

Cabinet Profile Screw Positions

TM13S

Drawer Length


Min. internal cabinet depth = drawer length + 3 mm
Actual loss of extension = 0 mm

270, 300, 350 mm

400 mm

450 mm

500, 550 mm

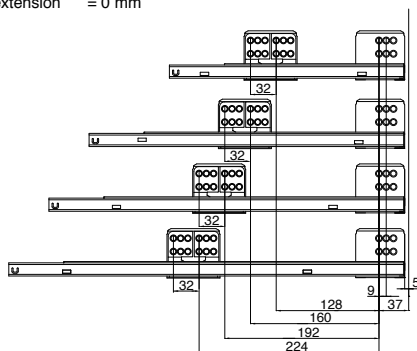

TM16S

Drawer Length


Min. internal cabinet depth = drawer length + 3 mm
Actual loss of extension = 0 mm

400 mm

450 mm

500, 550 mm


600, 650 mm

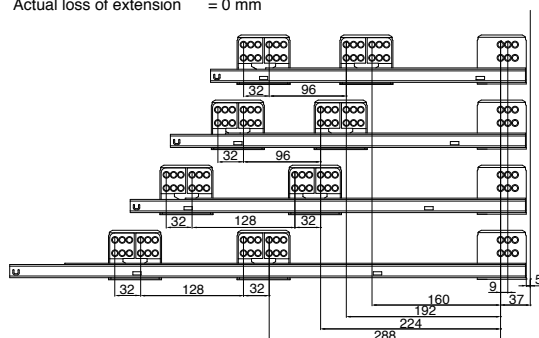

Cutting Dimensions for 16mm Chipboard

Back panel

Width = internal cabinet width - 87mm
Height = 84mm

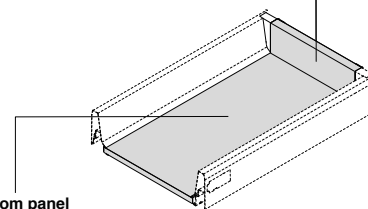




Bottom panel

Width = Internal cabinet width - 75mm
Length (Wooden Back) = drawer length - 24 mm
Length (Steel Back) = drawer length - 22 mm





- Roller bearing concealed runners
- Full extension with synchro control
- Steel drawer side **83mm**
- Load capacity of **35kg** or **60kg**
- Quick assembly
- **Sylent** integrated cushioning system
- Integrated lateral stabiliser

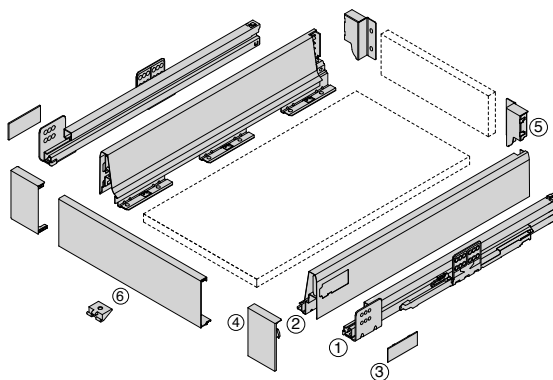

① 	Cabinet Profile Left / Right : galvanised		② 	Drawer Side Left / Right :
Drawer Length	35kg	60kg		
	Left/Right to be ordered separately		Left/Right to be ordered separately	
270mm	TM13S.27.GI		TD23.27.XX	
300mm	TM13S.30.GI		TD23.30.XX	
350mm	TM13S.35.GI		TD23.35.XX	
400mm	TM13S.40.GI	TM16S.40.GI	TD23.40.XX	
450mm	TM13S.45.GI	TM16S.45.GI	TD23.45.XX	
500mm	TM13S.50.GI	TM16S.50.GI	TD23.50.XX	
550mm	TM13S.55.GI	TM16S.55.GI	TD23.55.XX	
600mm		TM16S.60.GI	TD23.60.XX	
650mm		TM16S.65.GI	TD23.65.XX	
③ 	Cover Cap-harn Logo 2X RBC.62230-L1.XX		⑥ 	Front Panel
④ 	Front Fixing Bracket Left / Right : RBF.52330.XX Included one piece 208.000 & screws		⑥  Cabinet Width (16mm side panel) 1200mm	Cut to required width RPF870.1035.XX
⑤ 	Rear Fixing Bracket Left / Right : Left/Right to be ordered separately RBR.72330.XX Steel Back see page 60			

Space Requirements and Front Installation Dimensions

Back Installation Dimensions

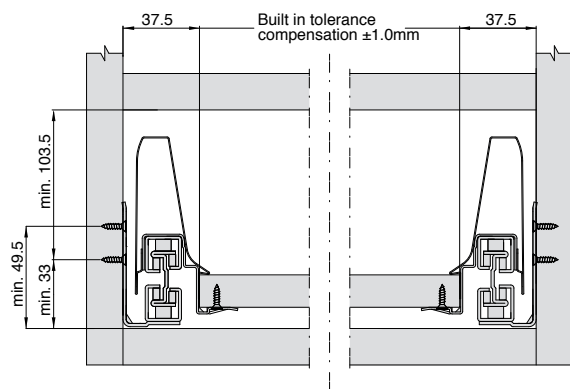

Cabinet Profile Screw Positions

TM13S

Drawer Length


Min. internal cabinet depth = drawer length + 3 mm
Actual loss of extension = 0 mm

270, 300, 350 mm

400 mm

450 mm

500, 550 mm

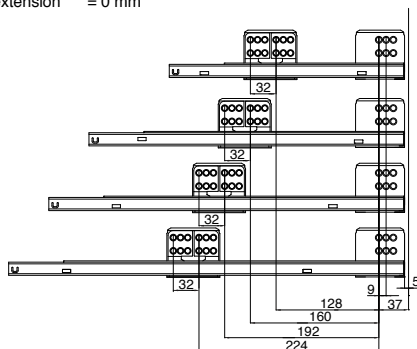

TM16S

Drawer Length


Min. internal cabinet depth = drawer length + 3 mm
Actual loss of extension = 0 mm

400 mm

450 mm

500, 550 mm


600, 650 mm

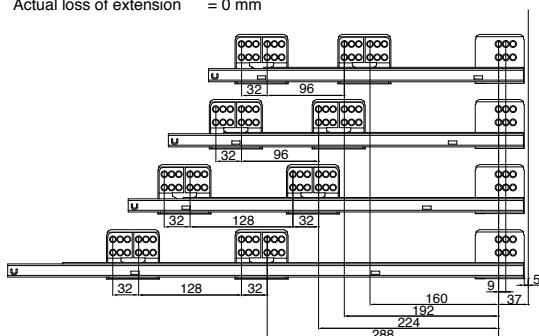

Cutting Dimensions for 16mm Chipboard

Back panel


Width = internal cabinet width - 87mm
Height = 84mm

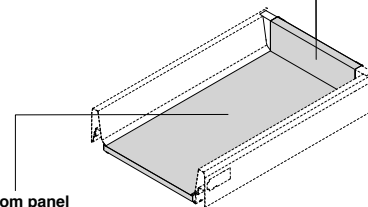

Bottom panel

Width = Internal cabinet width - 75mm
Length (Wooden Back) = drawer length - 24 mm
Length (Steel Back) = drawer length - 22 mm


Cutting Dimensions for Front Panel (RPF870)





Width = Internal cabinet width - 132mm




- Roller bearing concealed runners
- Full extension with synchro control
- Steel drawer side **115mm**
- Load capacity of **35kg** or **60kg**
- Quick assembly
- Flexible 2-dimensional front adjustment
- **Sylent** integrated cushioning system
- Integrated lateral stabiliser

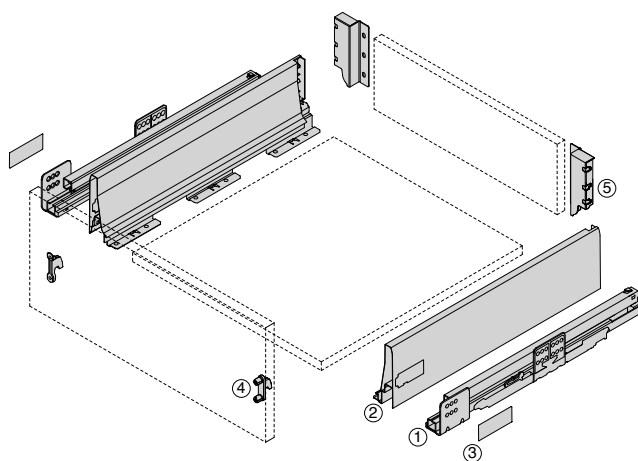


① 	Cabinet Profile Left / Right : galvanised		② 	Drawer Side Left / Right :
Drawer Length	35kg	60kg		
	Left/Right to be ordered separately		Left/Right to be ordered separately	
270mm	TM13S.27.GI		TD25.27.XX	
300mm	TM13S.30.GI		TD25.30.XX	
350mm	TM13S.35.GI		TD25.35.XX	
400mm	TM13S.40.GI	TM16S.40.GI	TD25.40.XX	
450mm	TM13S.45.GI	TM16S.45.GI	TD25.45.XX	
500mm	TM13S.50.GI	TM16S.50.GI	TD25.50.XX	
550mm	TM13S.55.GI	TM16S.55.GI	TD25.55.XX	
600mm		TM16S.60.GI	TD25.60.XX	
650mm		TM16S.65.GI	TD25.65.XX	
③ 	Cover Cap-harn Logo			
	2X	RBC.62230-L1.XX		
④ 	Front Fixing Bracket			
	 Screw-on	2X RBF.21130.GI		
	 Press-in	2X RBF.22130.GI		
	 Expansion	2X RBF.23130.GI		
⑤ 	Rear Fixing Bracket Left / Right :			
	Left/Right to be ordered separately			
		RBR.72530.XX		
	Steel Back	n/a		

Space Requirements and Front Installation Dimensions

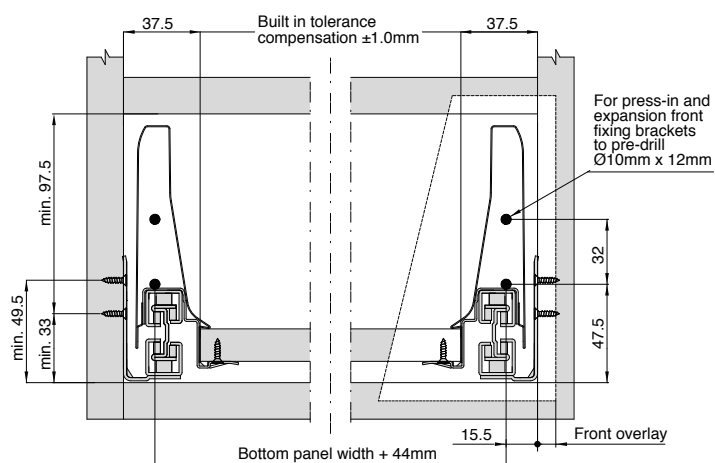

Back Installation Dimensions

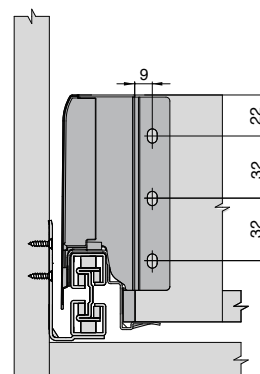

Cabinet Profile Screw Positions

TM13S

Drawer Length


Min. internal cabinet depth = drawer length + 3 mm
Actual loss of extension = 0 mm

270, 300, 350 mm

400 mm

450 mm

500, 550 mm

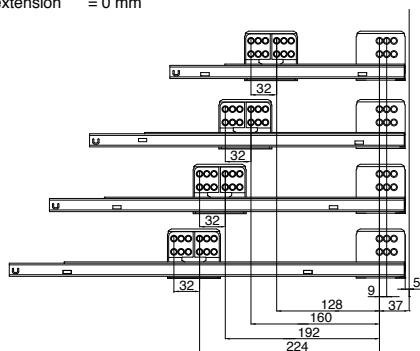

TM16S

Drawer Length


Min. internal cabinet depth = drawer length + 3 mm
Actual loss of extension = 0 mm

400 mm

450 mm

500, 550 mm


600, 650 mm

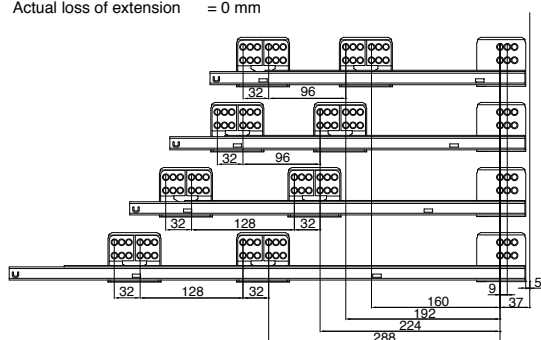

Cutting Dimensions for 16mm Chipboard

Back panel

Width = internal cabinet width - 87mm
Height = 116mm

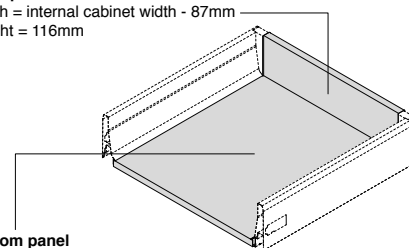





Bottom panel

Width = Internal cabinet width - 75mm
Length (Wooden Back) = drawer length - 24 mm
Length (Steel Back) = drawer length - 22 mm




- Roller bearing concealed runners
- Full extension with synchro control
- Steel drawer side **115mm**
- Load capacity of **35kg** or **60kg**
- Quick assembly
- **Sylent** integrated cushioning system
- Integrated lateral stabiliser

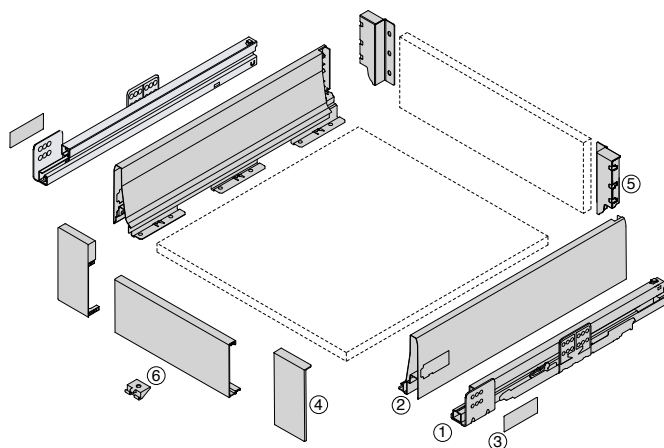


① 	Cabinet Profile Left / Right : galvanised		② 	
Drawer Length	35kg	60kg		
	Left/Right to be ordered separately		Left/Right to be ordered separately	
270mm	TM13S.27.GI		TD25.27.XX	
300mm	TM13S.30.GI		TD25.30.XX	
350mm	TM13S.35.GI		TD25.35.XX	
400mm	TM13S.40.GI	TM16S.40.GI	TD25.40.XX	
450mm	TM13S.45.GI	TM16S.45.GI	TD25.45.XX	
500mm	TM13S.50.GI	TM16S.50.GI	TD25.50.XX	
550mm	TM13S.55.GI	TM16S.55.GI	TD25.55.XX	
600mm		TM16S.60.GI	TD25.60.XX	
650mm		TM16S.65.GI	TD25.65.XX	
③ 	Cover Cap-harn Logo		⑥ 	
	2X	RBC.62230-L1.XX		
④ 	Front Fixing Bracket Left / Right :		⑥ 	
		RBF.52530.XX	Cabinet Width (16mm side panel)	Cut to required width
		Included one piece 208.000 & screws	1200mm	RPF870.1035.XX
⑤ 	Rear Fixing Bracket Left / Right :			
		Left/Right to be ordered separately		
		RBR.72530.XX		
	Steel Back	n/a		

Space Requirements and Front Installation Dimensions

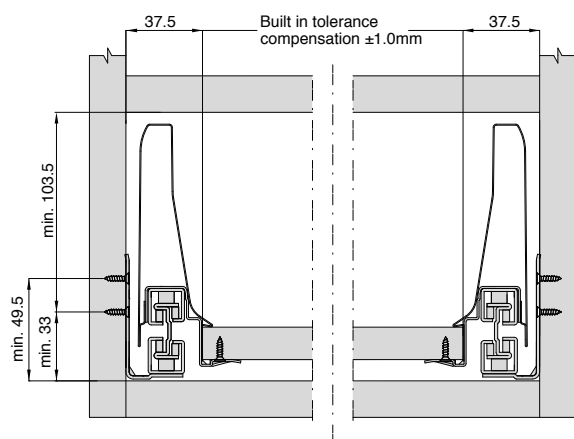

Back Installation Dimensions

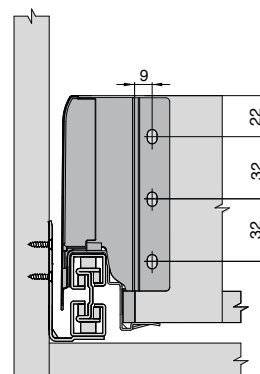

Cabinet Profile Screw Positions

TM13S

Drawer Length


Min. internal cabinet depth = drawer length + 3 mm
Actual loss of extension = 0 mm

270, 300, 350 mm

400 mm

450 mm

500, 550 mm

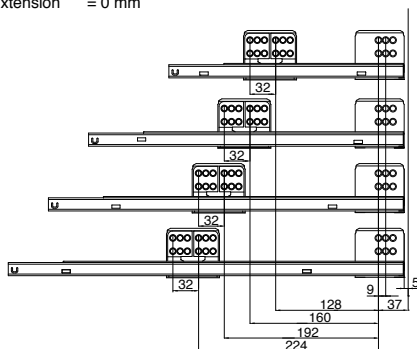

TM16S

Drawer Length


Min. internal cabinet depth = drawer length + 3 mm
Actual loss of extension = 0 mm

400 mm

450 mm

500, 550 mm


600, 650 mm

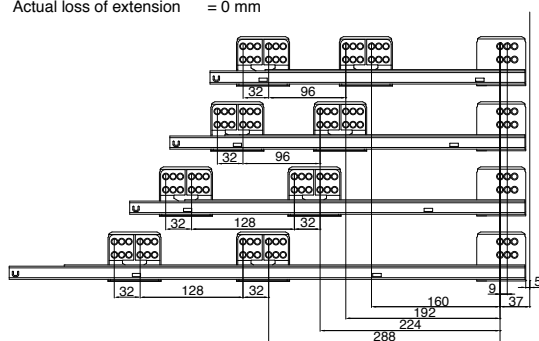

Cutting Dimensions for 16mm Chipboard

Back panel


Width = internal cabinet width - 87mm
Height = 116mm

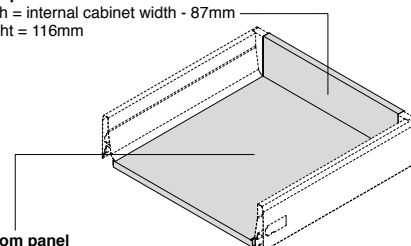

Bottom panel


Width = Internal cabinet width - 75mm
Length (Wooden Back) = drawer length - 24 mm
Length (Steel Back) = drawer length - 22 mm




Cutting Dimensions for Front Panel (RPF870)





- Roller bearing concealed runners
- Full extension with synchro control
- Steel drawer side **83mm**
- Load capacity of **35kg** or **60kg**
- Quick assembly
- Flexible 3-dimensional front adjustment
- **Sylent** integrated cushioning system
- Integrated lateral stabiliser

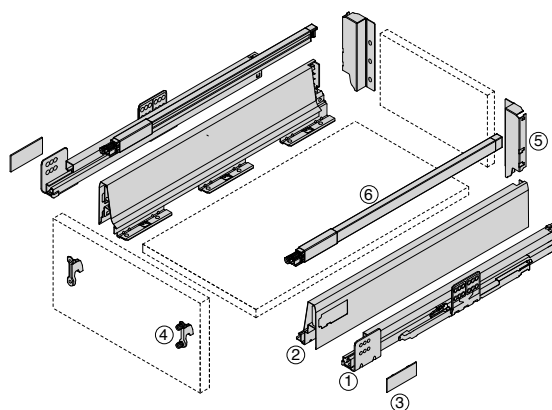


① 	Cabinet Profile Left / Right : galvanised		② 	Drawer Side Left / Right :	⑥ 	Railing Set Left / Right :
Drawer Length	35kg	60kg			Inclusive of Screw-on and Expansion railing adaptor	
	Left/Right to be ordered separately		Left/Right to be ordered separately			
270mm	TM13S.27.GI			TD23.27.XX		RRA3.172.XX
300mm	TM13S.30.GI			TD23.30.XX		RRA3.202.XX
350mm	TM13S.35.GI			TD23.35.XX		RRA3.252.XX
400mm	TM13S.40.GI	TM16S.40.GI		TD23.40.XX		RRA3.302.XX
450mm	TM13S.45.GI	TM16S.45.GI		TD23.45.XX		RRA3.352.XX
500mm	TM13S.50.GI	TM16S.50.GI		TD23.50.XX		RRA3.402.XX
550mm	TM13S.55.GI	TM16S.55.GI		TD23.55.XX		RRA3.452.XX
600mm		TM16S.60.GI		TD23.60.XX		RRA3.502.XX
650mm		TM16S.65.GI		TD23.65.XX		RRA3.552.XX

③ 	Cover Cap-harn Logo	
	2X	RBC.62230-L1.XX


④ 	Front Fixing Bracket	
	Screw- on	2X RBF.21130.GI
	Press-in	2X RBF.22130.GI
	Expansion	2X RBF.23130.GI

⑤ 	Rear Fixing Bracket Left / Right :	
	Left/Right to be ordered separately	
		RBR.73330.XX
	Steel Back	n/a

Space Requirements and Front Installation Dimensions

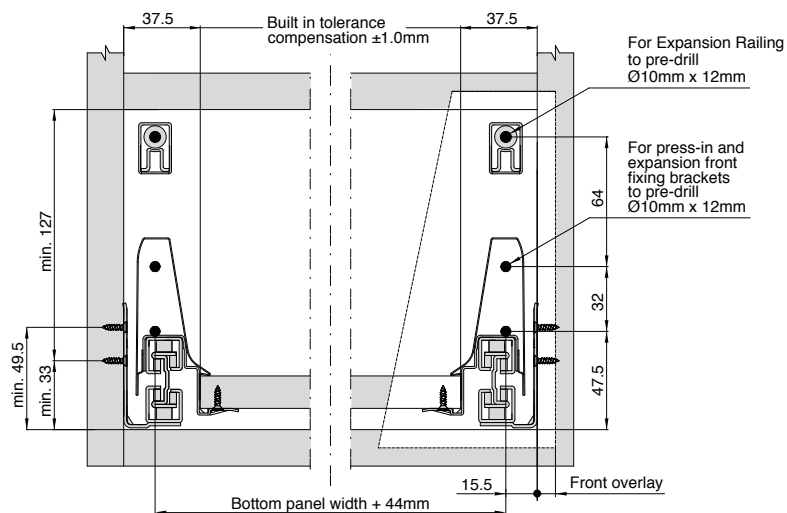

Back Installation Dimensions

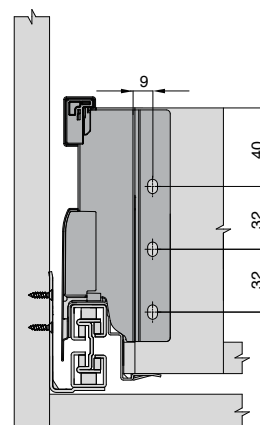

Cabinet Profile Screw Positions

TM13S

Drawer Length


Min. internal cabinet depth = drawer length + 3 mm
Actual loss of extension = 0 mm

270, 300, 350 mm

400 mm

450 mm

500, 550 mm

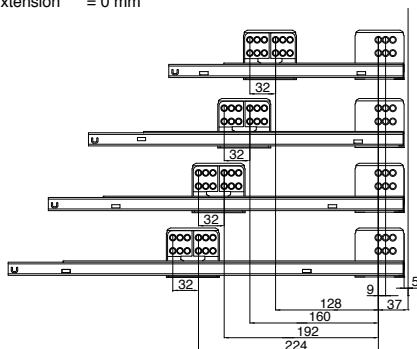

TM16S

Drawer Length


Min. internal cabinet depth = drawer length + 3 mm
Actual loss of extension = 0 mm

400 mm

450 mm

500, 550 mm


600, 650 mm

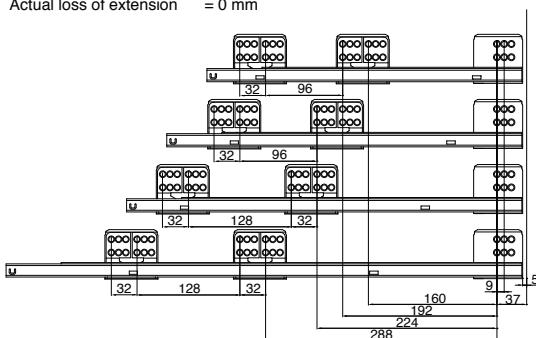

Cutting Dimensions for 16mm Chipboard

Back panel

Width = internal cabinet width - 87mm
Height = 135mm

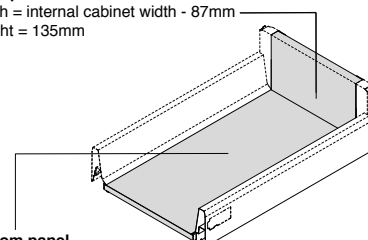





Bottom panel

Width = Internal cabinet width - 75mm
Length (Wooden Back) = drawer length - 24 mm
Length (Steel Back) = drawer length - 22 mm




- Roller bearing concealed runners
- Full extension with synchro control
- Steel drawer side **83mm**
- Load capacity of **35kg** or **60kg**
- Quick assembly
- Flexible 3-dimensional front adjustment
- **Sylent** integrated cushioning system
- Integrated lateral stabiliser

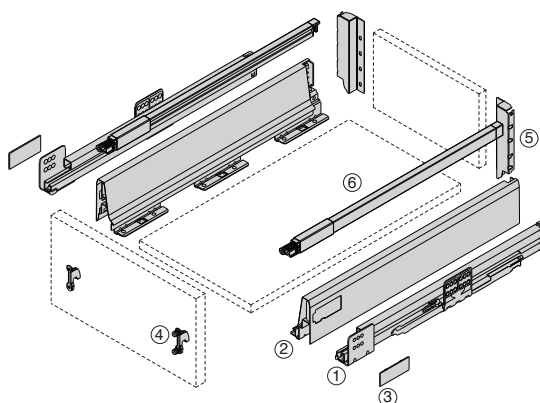


① 	Cabinet Profile Left / Right : galvanised		② 	Drawer Side Left / Right :	⑥ 	Railing Set Left / Right :
Drawer Length	35kg	60kg			Inclusive of Screw-on and Expansion railing adaptor	
	Left/Right to be ordered separately		Left/Right to be ordered separately			
270mm	TM13S.27.GI			TD23.27.XX		RRA3.172.XX
300mm	TM13S.30.GI			TD23.30.XX		RRA3.202.XX
350mm	TM13S.35.GI			TD23.35.XX		RRA3.252.XX
400mm	TM13S.40.GI	TM16S.40.GI		TD23.40.XX		RRA3.302.XX
450mm	TM13S.45.GI	TM16S.45.GI		TD23.45.XX		RRA3.352.XX
500mm	TM13S.50.GI	TM16S.50.GI		TD23.50.XX		RRA3.402.XX
550mm	TM13S.55.GI	TM16S.55.GI		TD23.55.XX		RRA3.452.XX
600mm		TM16S.60.GI		TD23.60.XX		RRA3.502.XX
650mm		TM16S.65.GI		TD23.65.XX		RRA3.552.XX

③ 	Cover Cap-harn Logo	
	2X	RBC.62230-L1.XX


④ 	Front Fixing Bracket	
	Screw- on	2X RBF.21130.GI
	Press-in	2X RBF.22130.GI
	Expansion	2X RBF.23130.GI

⑤ 	Rear Fixing Bracket Left / Right :	
	Left/Right to be ordered separately	
		RBR.74330.XX
Steel Back	n/a	

Space Requirements and Front Installation Dimensions

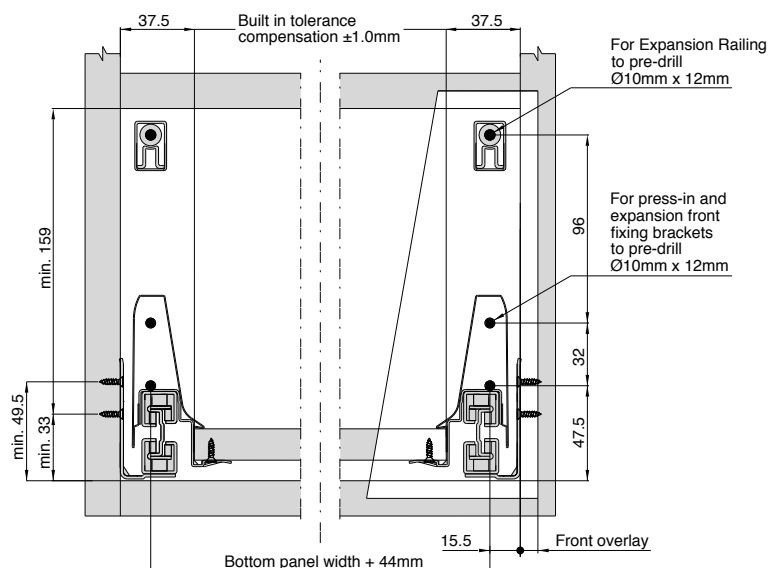

Back Installation Dimensions

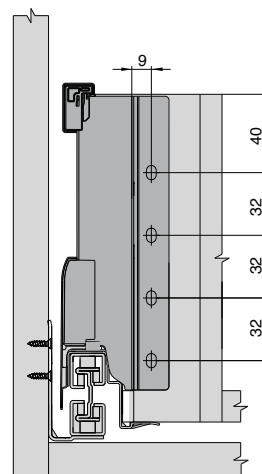

Cabinet Profile Screw Positions

TM13S

Drawer Length


Min. internal cabinet depth = drawer length + 3 mm
Actual loss of extension = 0 mm

270, 300, 350 mm

400 mm

450 mm

500, 550 mm

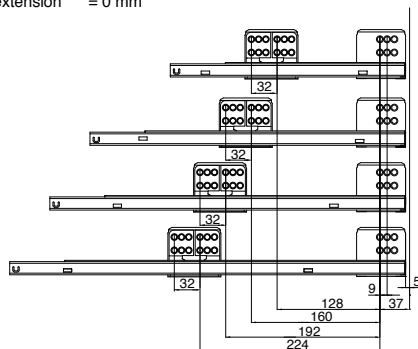

TM16S

Drawer Length


Min. internal cabinet depth = drawer length + 3 mm
Actual loss of extension = 0 mm

400 mm

450 mm

500, 550 mm


600, 650 mm

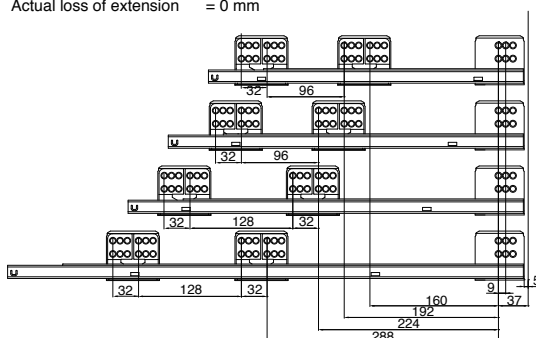

Cutting Dimensions for 16mm Chipboard

Back panel

Width = internal cabinet width - 87mm
Height = 167mm

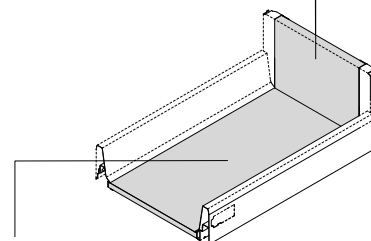







Bottom panel

Width = Internal cabinet width - 75mm
Length (Wooden Back) = drawer length - 24 mm
Length (Steel Back) = drawer length - 22 mm




- Roller bearing concealed runners
- Full extension with synchro control
- Steel drawer side **83mm**
- Load capacity of **35kg** or **60kg**
- Quick assembly
- Flexible 3-dimensional front adjustment
- **Sylent** integrated cushioning system
- Integrated lateral stabiliser

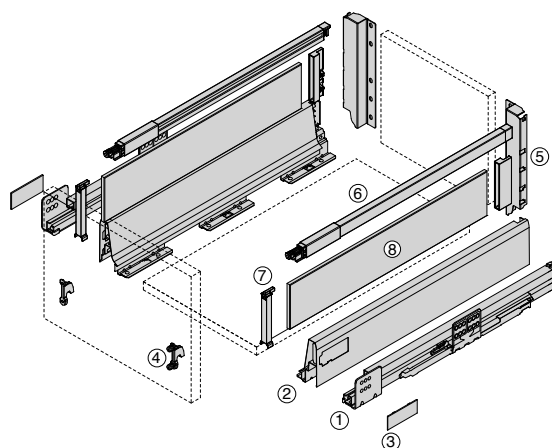


	Cabinet Profile Left / Right : galvanised			Drawer Side Left / Right :		Railing Set Left / Right :		
Drawer Length	35kg	60kg			Inclusive of Screw-on and Expansion railing adaptor			
	Left/Right to be ordered separately		Left/Right to be ordered separately					
270mm	TM13S.27.GI		TD23.27.XX		RRA3.172.XX			
300mm	TM13S.30.GI		TD23.30.XX		RRA3.202.XX			
350mm	TM13S.35.GI		TD23.35.XX		RRA3.252.XX			
400mm	TM13S.40.GI	TM16S.40.GI	TD23.40.XX		RRA3.302.XX			
450mm	TM13S.45.GI	TM16S.45.GI	TD23.45.XX		RRA3.352.XX			
500mm	TM13S.50.GI	TM16S.50.GI	TD23.50.XX		RRA3.402.XX			
550mm	TM13S.55.GI	TM16S.55.GI	TD23.55.XX		RRA3.452.XX			
600mm		TM16S.60.GI	TD23.60.XX		RRA3.502.XX			
650mm		TM16S.65.GI	TD23.65.XX		RRA3.552.XX			
	Cover Cap-harn Logo			Side Extend Adaptor Left / Right :				
	2X	RBC.62230-L1.XX		RSE2-HG.000.XX				
	Front Fixing Bracket			Side Extend Panel				
	 Screw-on	2X		RBF.21130.GI	Drawer Length	Aluminium	Glass	
	 Press-in	2X		RBF.22130.GI	270mm	2X RSP-HA.237.XX	2X RSP-HG.237.NA	
	 Expansion	2X		RBF.23130.GI	300mm	2X RSP-HA.267.XX	2X RSP-HG.267.NA	
	Rear Fixing Bracket Left / Right :		350mm				2X RSP-HA.317.XX	2X RSP-HG.317.NA
	Left/Right to be ordered separately		400mm				2X RSP-HA.367.XX	2X RSP-HG.367.NA
			450mm				2X RSP-HA.417.XX	2X RSP-HG.417.NA
			500mm				2X RSP-HA.467.XX	2X RSP-HG.467.NA
			550mm				2X RSP-HA.517.XX	2X RSP-HG.517.NA
		600mm				2X RSP-HA.567.XX	2X RSP-HG.567.NA	
		650mm				2X RSP-HA.617.XX	2X RSP-HG.617.NA	
Steel Back		see page 60						

Colour Code XX
Standard : 01 - R9010 White 22 - R9006 Grey Metallic 25 - Lite Grey

Space Requirements and Front Installation Dimensions

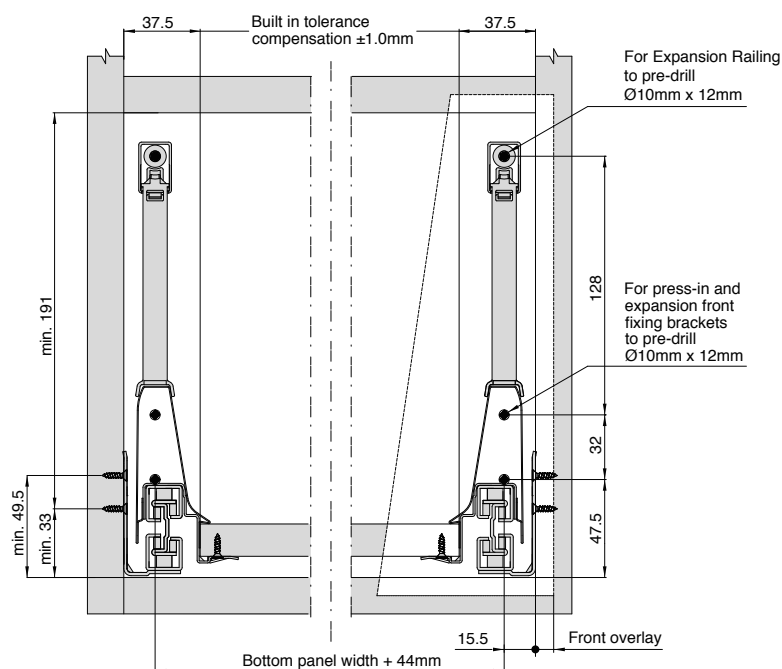

Back Installation Dimensions

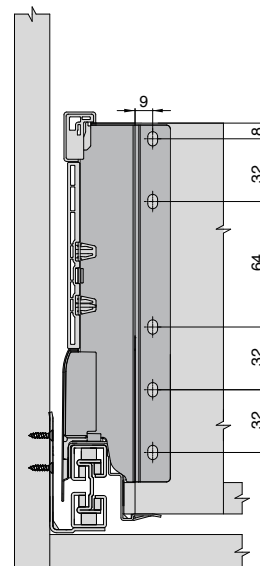

Cabinet Profile Screw Positions

TM13S

Drawer Length


Min. internal cabinet depth = drawer length + 3 mm
Actual loss of extension = 0 mm

270, 300, 350 mm

400 mm

450 mm

500, 550 mm

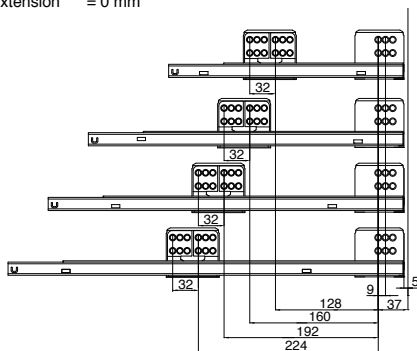

TM16S

Drawer Length


Min. internal cabinet depth = drawer length + 3 mm
Actual loss of extension = 0 mm

400 mm

450 mm

500, 550 mm


600, 650 mm

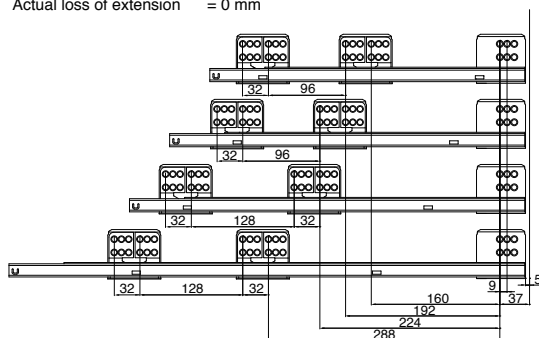

Cutting Dimensions for 16mm Chipboard

Back panel


Width = internal cabinet width - 87mm
Height = 199mm

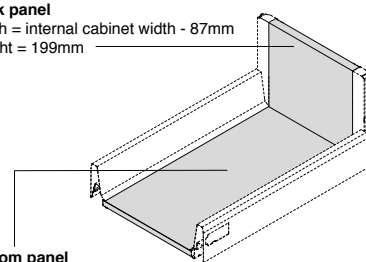

Bottom panel

Width = Internal cabinet width - 75mm
Length (Wooden Back) = drawer length - 24 mm
Length (Steel Back) = drawer length - 22 mm

Cutting Dimension for Side Extend Panel







For norm compliance
no safety glass is required.

The edge is a polished flat ended
edge with a 1mm ± 0.5mm bevel.




- Roller bearing concealed runners
- Full extension with synchro control
- Steel drawer side **83mm**
- Load capacity of **35kg** or **60kg**
- Quick assembly
- **Sylent** integrated cushioning system
- Integrated lateral stabiliser

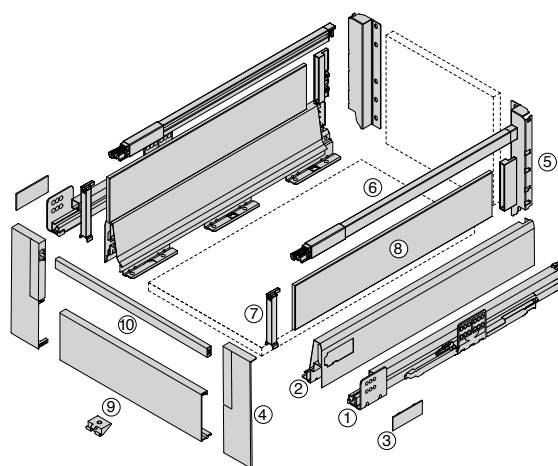


 	Cabinet Profile Left / Right : galvanised		 	Drawer Side Left / Right :	 	Railing Set Left / Right :
Drawer Length	35kg	60kg			Inclusive of Screw-on and Expansion railing adaptor	
	Left/Right to be ordered separately		Left/Right to be ordered separately			
270mm	TM13S.27.GI			TD23.27.XX		RRA3.172.XX
300mm	TM13S.30.GI			TD23.30.XX		RRA3.202.XX
350mm	TM13S.35.GI			TD23.35.XX		RRA3.252.XX
400mm	TM13S.40.GI	TM16S.40.GI		TD23.40.XX		RRA3.302.XX
450mm	TM13S.45.GI	TM16S.45.GI		TD23.45.XX		RRA3.352.XX
500mm	TM13S.50.GI	TM16S.50.GI		TD23.50.XX		RRA3.402.XX
550mm	TM13S.55.GI	TM16S.55.GI		TD23.55.XX		RRA3.452.XX
600mm		TM16S.60.GI		TD23.60.XX		RRA3.502.XX
650mm		TM16S.65.GI		TD23.65.XX		RRA3.552.XX
 	Cover Cap-harn Logo		 	Front Fixing Bracket Left / Right :	 	Rear Fixing Bracket Left / Right :
	2X	RBC.62230-L1.XX				
 	Side Extend Adaptor Left / Right :			RBF.55330.XX	Left/Right to be ordered separately	RBR.75330.XX
		RSE2-HG.000.XX		Included one piece 208.000 & screws	Steel Back	see page 60
 	Front Panel		 	Side Extend Panel		
	Cabinet Width (16mm side panel)	Cut to required width		Drawer Length	Aluminium	Glass
	1200mm	RPF870.1035.XX		270mm	2X RSP-HA.237.XX	2X RSP-HG.237.NA
				300mm	2X RSP-HA.267.XX	2X RSP-HG.267.NA
				350mm	2X RSP-HA.317.XX	2X RSP-HG.317.NA
				400mm	2X RSP-HA.367.XX	2X RSP-HG.367.NA
				450mm	2X RSP-HA.417.XX	2X RSP-HG.417.NA
				500mm	2X RSP-HA.467.XX	2X RSP-HG.467.NA
				550mm	2X RSP-HA.517.XX	2X RSP-HG.517.NA
 	Rectangular Cross Railing			600mm	2X RSP-HA.567.XX	2X RSP-HG.567.NA
	Cabinet Width (16mm side panel)	Cut to required width		650mm	2X RSP-HA.617.XX	2X RSP-HG.617.NA
	1200mm	RRF2.1045.XX				
Colour Code XX Standard : 01 - R9010 White 22 - R9006 Grey Metallic 25 - Lite Grey						

Space Requirements and Front Installation Dimensions

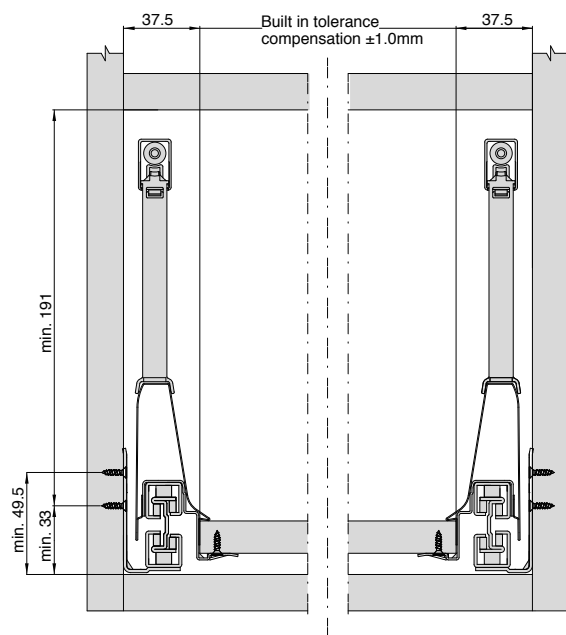

Back Installation Dimensions

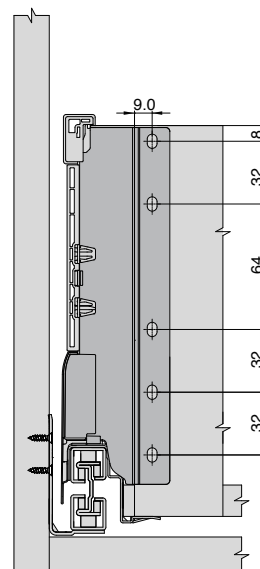

Cabinet Profile Screw Positions

TM13S

Drawer Length


Min. internal cabinet depth = drawer length + 3 mm
Actual loss of extension = 0 mm

270, 300, 350 mm

400 mm

450 mm

500, 550 mm

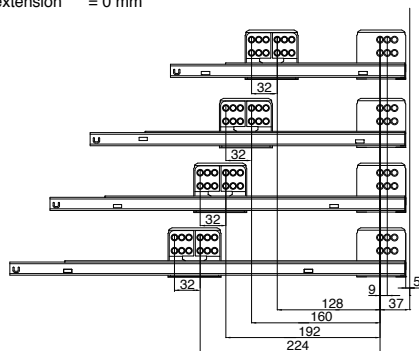

TM16S

Drawer Length


Min. internal cabinet depth = drawer length + 3 mm
Actual loss of extension = 0 mm

400 mm

450 mm

500, 550 mm


600, 650 mm

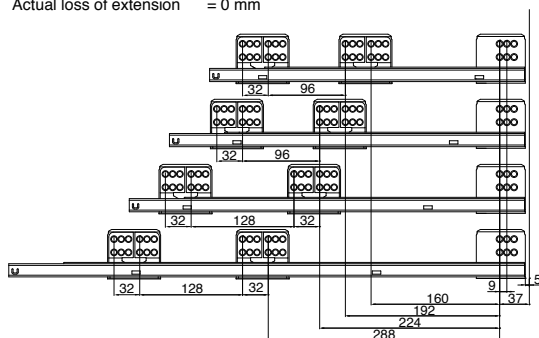

Cutting Dimensions for 16mm Chipboard

Back panel


Width = internal cabinet width - 87mm
Height = 199mm

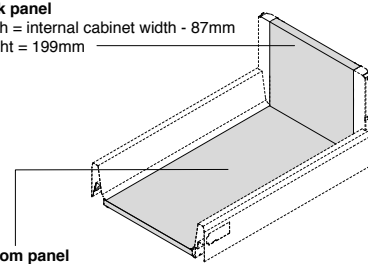


Bottom panel

Width = Internal cabinet width - 75mm
Length (Wooden Back) = drawer length - 24 mm
Length (Steel Back) = drawer length - 22 mm


Cutting Dimensions for Front Panel (RPF870)



Cutting Dimensions for Rectangular Cross Railing



Cutting Dimension for Side Extend Panel











For norm compliance
no safety glass is required.

The edge is a polished flat ended edge
with a 1mm ± 0.5mm bevel.




- Roller bearing concealed runners
- Full extension with synchro control
- Steel drawer side **83mm**
- Load capacity of **35kg** or **60kg**
- Quick assembly
- Flexible 3-dimensional front adjustment
- **Sylent** integrated cushioning system
- Integrated lateral stabiliser

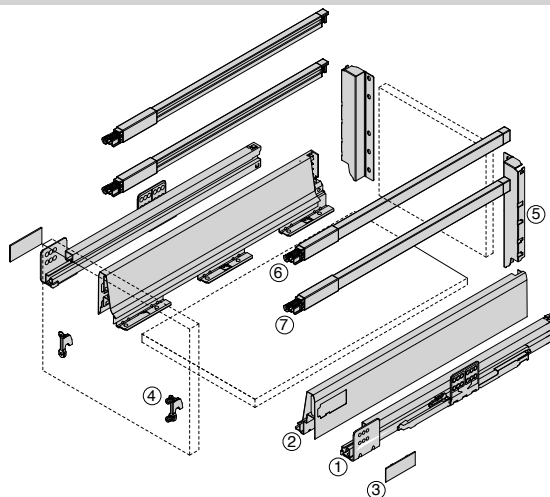


	Cabinet Profile Left / Right : galvanised			Drawer Side Left / Right :		Railing Set Left / Right :
Drawer Length	35kg	60kg			Inclusive of Screw-on and Expansion railing adaptor	
	Left/Right to be ordered separately					
270mm	TM13S.27.GI		TD23.27.XX		RRA3.172.XX	
300mm	TM13S.30.GI		TD23.30.XX		RRA3.202.XX	
350mm	TM13S.35.GI		TD23.35.XX		RRA3.252.XX	
400mm	TM13S.40.GI	TM16S.40.GI	TD23.40.XX		RRA3.302.XX	
450mm	TM13S.45.GI	TM16S.45.GI	TD23.45.XX		RRA3.352.XX	
500mm	TM13S.50.GI	TM16S.50.GI	TD23.50.XX		RRA3.402.XX	
550mm	TM13S.55.GI	TM16S.55.GI	TD23.55.XX		RRA3.452.XX	
600mm		TM16S.60.GI	TD23.60.XX		RRA3.502.XX	
650mm		TM16S.65.GI	TD23.65.XX		RRA3.552.XX	
	Cover Cap-harn Logo			Double Railing Left / Right :		
	2X	RBC.62230-L1.XX		Inclusive of Screw-on and Expansion railing adaptor		
	Front Fixing Bracket		270mm	RRA5.172.XX		
	 Screw- on	2X RBF.21130.GI	300mm	RRA5.202.XX		
	 Press-in	2X RBF.22130.GI	350mm	RRA5.252.XX		
	 Expansion	2X RBF.23130.GI	400mm	RRA5.302.XX		
	Rear Fixing Bracket Left / Right :		450mm	RRA5.352.XX		
			500mm	RRA5.402.XX		
	Left/Right to be ordered separately		550mm	RRA5.452.XX		
			600mm	RRA5.502.XX		
		RBR.75330.XX	650mm	RRA5.552.XX		
	Steel Back	see page 60				

Space Requirements and Front Installation Dimensions

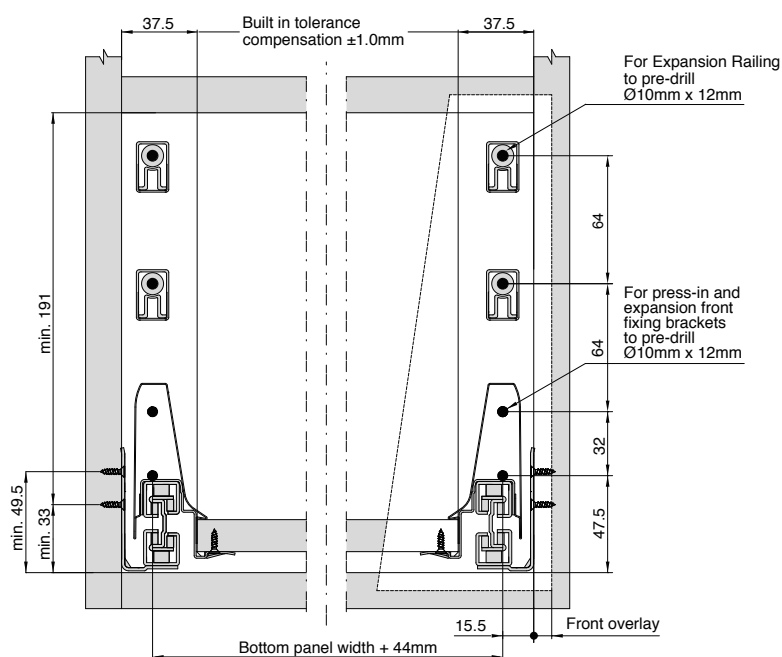

Back Installation Dimensions

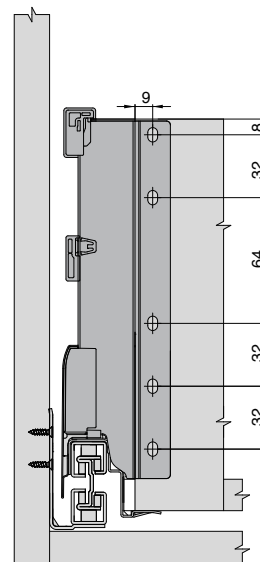

Cabinet Profile Screw Positions

TM13S

Drawer Length


Min. internal cabinet depth = drawer length + 3 mm
Actual loss of extension = 0 mm

270, 300, 350 mm

400 mm

450 mm

500, 550 mm

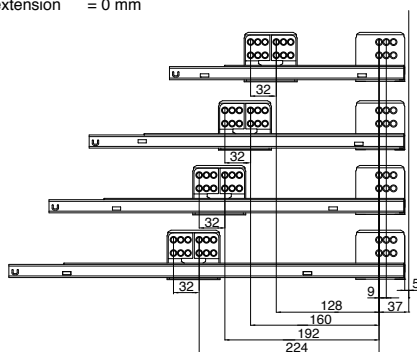

TM16S

Drawer Length


Min. internal cabinet depth = drawer length + 3 mm
Actual loss of extension = 0 mm

400 mm

450 mm

500, 550 mm


600, 650 mm

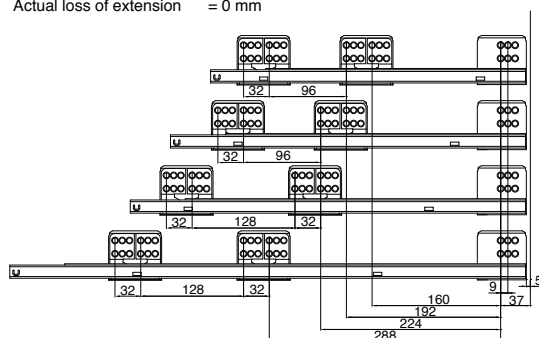

Cutting Dimensions for 16mm Chipboard

Back panel

Width = internal cabinet width - 87mm
Height = 199mm

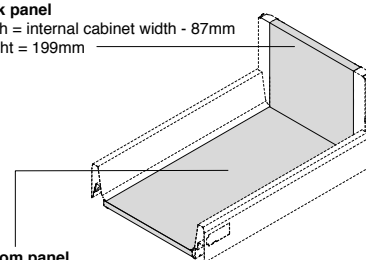






Bottom panel

Width = Internal cabinet width - 75mm
Length (Wooden Back) = drawer length - 24 mm
Length (Steel Back) = drawer length - 22 mm




- Roller bearing concealed runners
- Full extension with synchro control
- Steel drawer side **83mm**
- Load capacity of **35kg** or **60kg**
- Quick assembly
- **Sylent** integrated cushioning system
- Integrated lateral stabiliser

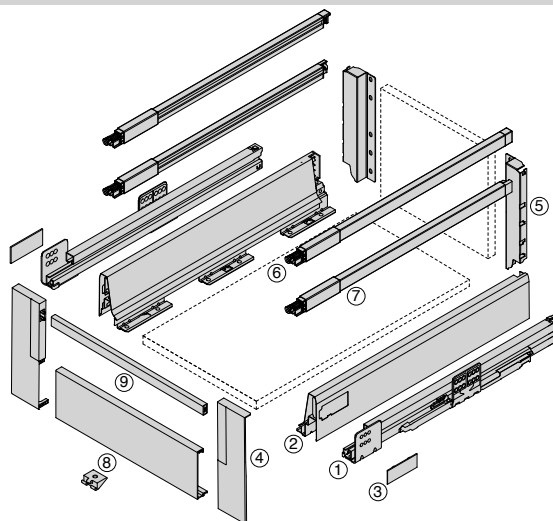


	Cabinet Profile Left / Right : galvanised		Drawer Side Left / Right :	Railing Set Left / Right :
Drawer Length	35kg	60kg		
	Left/Right to be ordered separately		Left/Right to be ordered separately	
270mm	TM13S.27.GI		TD23.27.XX	RRA3.172.XX
300mm	TM13S.30.GI		TD23.30.XX	RRA3.202.XX
350mm	TM13S.35.GI		TD23.35.XX	RRA3.252.XX
400mm	TM13S.40.GI	TM16S.40.GI	TD23.40.XX	RRA3.302.XX
450mm	TM13S.45.GI	TM16S.45.GI	TD23.45.XX	RRA3.352.XX
500mm	TM13S.50.GI	TM16S.50.GI	TD23.50.XX	RRA3.402.XX
550mm	TM13S.55.GI	TM16S.55.GI	TD23.55.XX	RRA3.452.XX
600mm		TM16S.60.GI	TD23.60.XX	RRA3.502.XX
650mm		TM16S.65.GI	TD23.65.XX	RRA3.552.XX
	Cover Cap-harn Logo		Rear Fixing Bracket Left / Right :	
	2X	RBC.62230-L1.XX	Left/Right to be ordered separately	
				RBR.75330.XX
Front Fixing Bracket Left / Right :	Double Railing Left / Right :	Inclusive of Screw-on and Expansion railing adaptor		
	RBF.55330.XX			
		Included one piece 208.000 & screws		
	Front Panel			
	Cabinet Width (16mm side panel)	Cut to required width		
	1200mm	RPF870.1035.XX		
	Rectangular Cross Railing			
	Cabinet Width (16mm side panel)	Cut to required width		
	1200mm	RRF2.1045.XX		

Space Requirements and Front Installation Dimensions

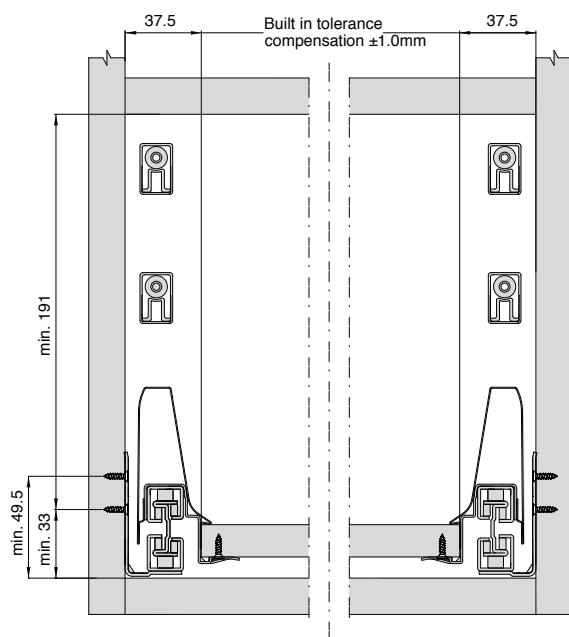

Back Installation Dimensions

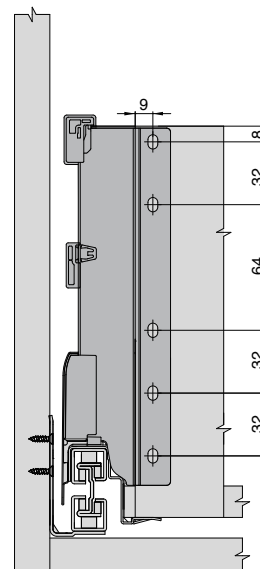

Cabinet Profile Screw Positions

TM13S

Drawer Length


Min. internal cabinet depth = drawer length + 3 mm
Actual loss of extension = 0 mm

270, 300, 350 mm

400 mm

450 mm

500, 550 mm

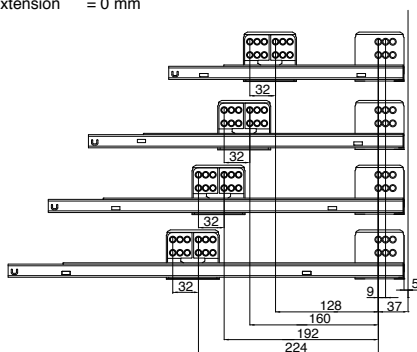

TM16S

Drawer Length


Min. internal cabinet depth = drawer length + 3 mm
Actual loss of extension = 0 mm

400 mm

450 mm

500, 550 mm


600, 650 mm

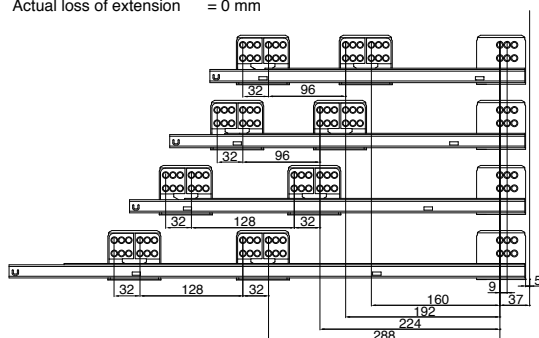

Cutting Dimensions for 16mm Chipboard

Back panel


Width = internal cabinet width - 87mm
Height = 199mm

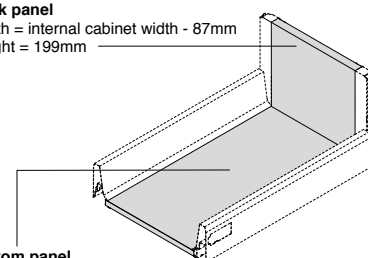


Bottom panel

Width = Internal cabinet width - 75mm
Length (Wooden Back) = drawer length - 24 mm
Length (Steel Back) = drawer length - 22 mm

Cutting Dimensions for Front Panel (RPF870)








Cutting Dimensions for Rectangular Cross Railing






- Roller bearing concealed runners
- Full extension with synchro control
- Steel drawer side **115mm**
- Load capacity of **35kg** or **60kg**
- Quick assembly
- Flexible 3-dimensional front adjustment
- **Sylent** integrated cushioning system
- Integrated lateral stabiliser

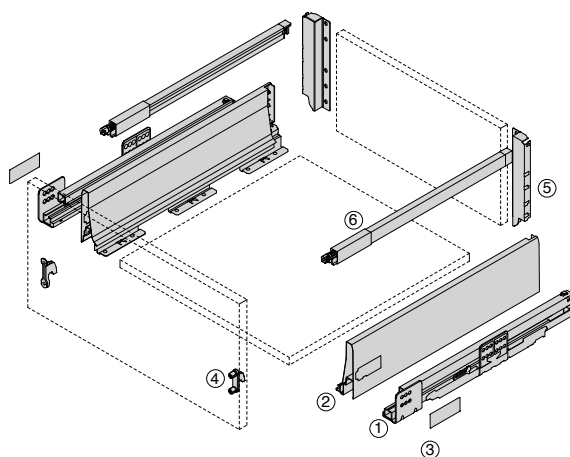


 	Cabinet Profile Left / Right : galvanised		 	Drawer Side Left / Right :	 	Railing Set Left / Right :
Drawer Length	35kg	60kg			Inclusive of Screw-on and Expansion railing adaptor	
	Left/Right to be ordered separately					
270mm	TM13S.27.GI		TD25.27.XX		RRA3.172.XX	
300mm	TM13S.30.GI		TD25.30.XX		RRA3.202.XX	
350mm	TM13S.35.GI		TD25.35.XX		RRA3.252.XX	
400mm	TM13S.40.GI	TM16S.40.GI	TD25.40.XX		RRA3.302.XX	
450mm	TM13S.45.GI	TM16S.45.GI	TD25.45.XX		RRA3.352.XX	
500mm	TM13S.50.GI	TM16S.50.GI	TD25.50.XX		RRA3.402.XX	
550mm	TM13S.55.GI	TM16S.55.GI	TD25.55.XX		RRA3.452.XX	
600mm		TM16S.60.GI	TD25.60.XX		RRA3.502.XX	
650mm		TM16S.65.GI	TD25.65.XX		RRA3.552.XX	
 	Cover Cap-harn Logo					
	2X	RBC.62230-L1.XX				
 	Front Fixing Bracket					
	 Screw-on	2X RBF.21130.GI				
	 Press-in	2X RBF.22130.GI				
	 Expansion	2X RBF.23130.GI				
 	Rear Fixing Bracket Left / Right :					
	Left/Right to be ordered separately					
		RBR.75330.XX				
	Steel Back	see page 60				

Space Requirements and Front Installation Dimensions

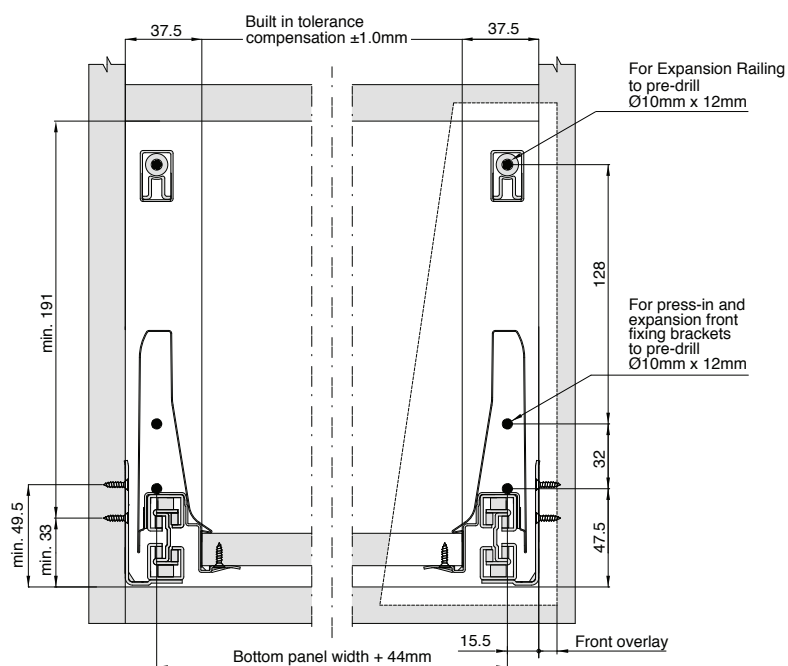

Back Installation Dimensions

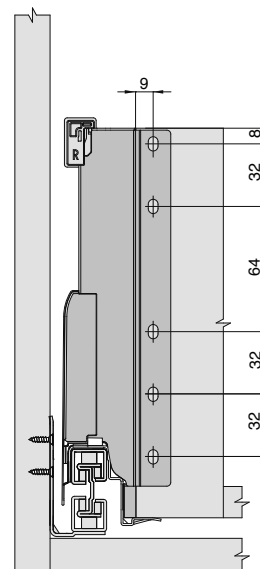

Cabinet Profile Screw Positions

TM13S

Drawer Length


Min. internal cabinet depth = drawer length + 3 mm
Actual loss of extension = 0 mm

270, 300, 350 mm

400 mm

450 mm

500, 550 mm

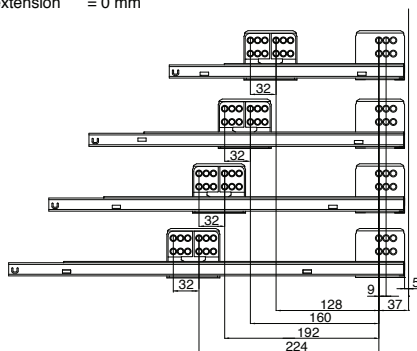

TM16S

Drawer Length


Min. internal cabinet depth = drawer length + 3 mm
Actual loss of extension = 0 mm

400 mm

450 mm

500, 550 mm


600, 650 mm

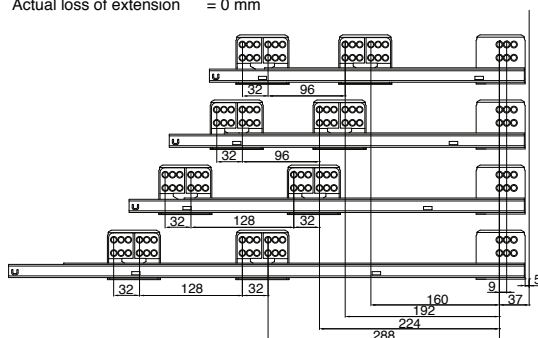

Cutting Dimensions for 16mm Chipboard

Back panel

Width = internal cabinet width - 87mm
Height = 199mm

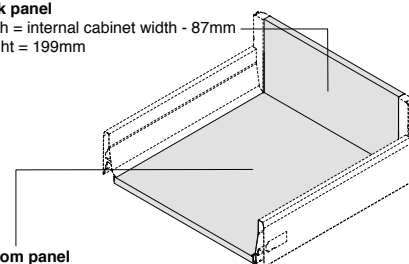


Bottom panel

Width = Internal cabinet width - 75mm
Length (Wooden Back) = drawer length - 24 mm
Length (Steel Back) = drawer length - 22 mm




- Roller bearing concealed runners
- Full extension with synchro control
- Steel drawer side **115mm**
- Load capacity of **35kg** or **60kg**
- Quick assembly
- **Sylent** integrated cushioning system
- Integrated lateral stabiliser

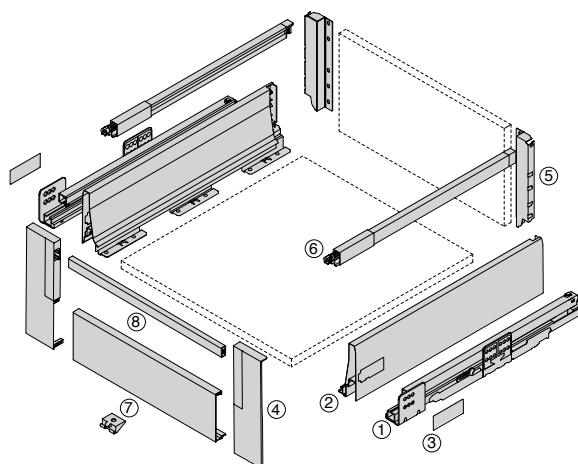


①	Cabinet Profile Left / Right : galvanised		②	Drawer Side Left / Right :	⑥	Railing Set Left / Right :
Drawer Length	35kg	60kg			Inclusive of Screw-on and Expansion railing adaptor	
	Left/Right to be ordered separately		Left/Right to be ordered separately			
270mm	TM13S.27.GI			TD25.27.XX		RRA3.172.XX
300mm	TM13S.30.GI			TD25.30.XX		RRA3.202.XX
350mm	TM13S.35.GI			TD25.35.XX		RRA3.252.XX
400mm	TM13S.40.GI	TM16S.40.GI		TD25.40.XX		RRA3.302.XX
450mm	TM13S.45.GI	TM16S.45.GI		TD25.45.XX		RRA3.352.XX
500mm	TM13S.50.GI	TM16S.50.GI		TD25.50.XX		RRA3.402.XX
550mm	TM13S.55.GI	TM16S.55.GI		TD25.55.XX		RRA3.452.XX
600mm		TM16S.60.GI		TD25.60.XX		RRA3.502.XX
650mm		TM16S.65.GI		TD25.65.XX		RRA3.552.XX
③	Cover Cap-harn Logo 2X RBC.62230-L1.XX		⑦	Front Panel	⑧	Rectangular Cross Railing
④	Front Fixing Bracket Left / Right :		Cabinet Width (16mm side panel)	Cut to required width	Cabinet Width (16mm side panel)	Cut to required width
		RBF.55330.XX	1200mm	RPF870.1035.XX	1200mm	RRF2.1045.XX
		Included one piece 208.000 & screws				
⑤	Rear Fixing Bracket Left / Right :					
	Left/Right to be ordered separately					
		RBR.75330.XX				
	Steel Back	see page 60				

Space Requirements and Front Installation Dimensions

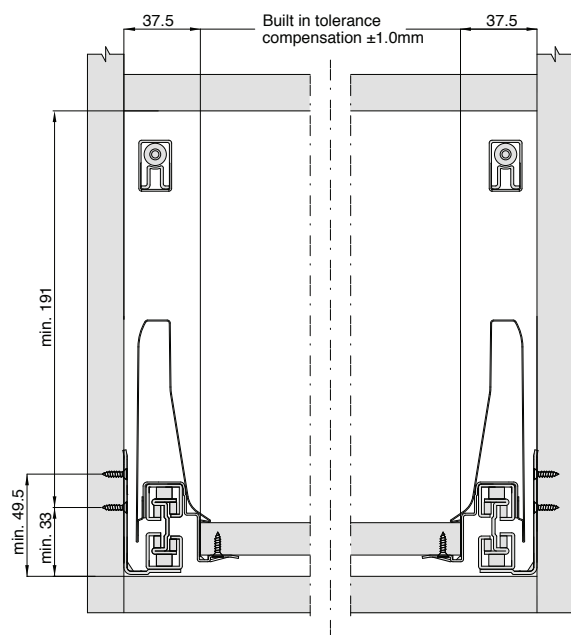

Back Installation Dimensions

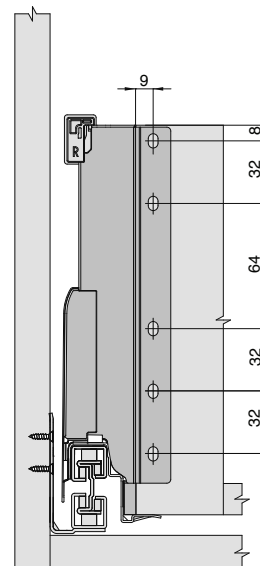

Cabinet Profile Screw Positions

TM13S

Drawer Length


Min. internal cabinet depth = drawer length + 3 mm
Actual loss of extension = 0 mm

270, 300, 350 mm

400 mm

450 mm

500, 550 mm

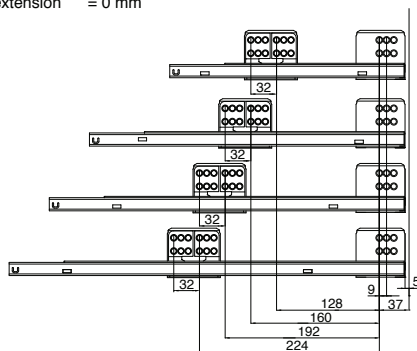

TM16S

Drawer Length


Min. internal cabinet depth = drawer length + 3 mm
Actual loss of extension = 0 mm

400 mm

450 mm

500, 550 mm


600, 650 mm

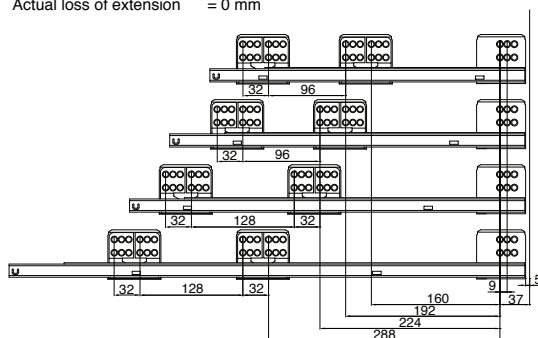

Cutting Dimensions for 16mm Chipboard

Back panel


Width = internal cabinet width - 87mm
Height = 199mm

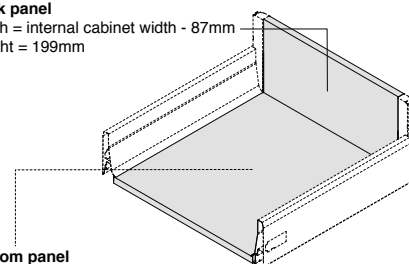


Bottom panel

Width = Internal cabinet width - 75mm
Length (Wooden Back) = drawer length - 24 mm
Length (Steel Back) = drawer length - 22 mm

Cutting Dimensions for Front Panel (RPF870)







Cutting Dimensions for Rectangular Cross Railing






- Roller bearing concealed runners
- Full extension with synchro control
- Steel drawer side **83mm**
- Load capacity of **35kg** or **60kg**
- Quick assembly
- Flexible 3-dimensional front adjustment
- **Sylent** integrated cushioning system
- Integrated lateral stabiliser

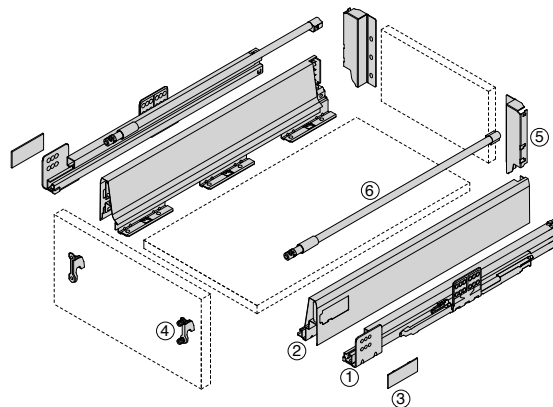


① 	Cabinet Profile Left / Right : galvanised		② 	Drawer Side Left / Right :	⑥ 	Railing Set Left / Right :
Drawer Length	35kg	60kg			Inclusive of Screw-on and Expansion railing adaptor	
	Left/Right to be ordered separately		Left/Right to be ordered separately			
270mm	TM13S.27.GI			TD23.27.XX		RRA2.222.XX
300mm	TM13S.30.GI			TD23.30.XX		RRA2.252.XX
350mm	TM13S.35.GI			TD23.35.XX		RRA2.302.XX
400mm	TM13S.40.GI	TM16S.40.GI		TD23.40.XX		RRA2.352.XX
450mm	TM13S.45.GI	TM16S.45.GI		TD23.45.XX		RRA2.402.XX
500mm	TM13S.50.GI	TM16S.50.GI		TD23.50.XX		RRA2.452.XX
550mm	TM13S.55.GI	TM16S.55.GI		TD23.55.XX		RRA2.502.XX
600mm		TM16S.60.GI		TD23.60.XX		RRA2.552.XX
650mm		TM16S.65.GI		TD23.65.XX		RRA2.602.XX
③ 	Cover Cap-harn Logo					
	2X	RBC.62230-L1.XX				
④ 	Front Fixing Bracket					
	 Screw-on	2X RBF.21130.GI				
	 Press-in	2X RBF.22130.GI				
	 Expansion	2X RBF.23130.GI				
⑤ 	Rear Fixing Bracket Left / Right :					
	Left/Right to be ordered separately					
		RBR.73330.XX				
	Steel Back	n/a				

Space Requirements and Front Installation Dimensions

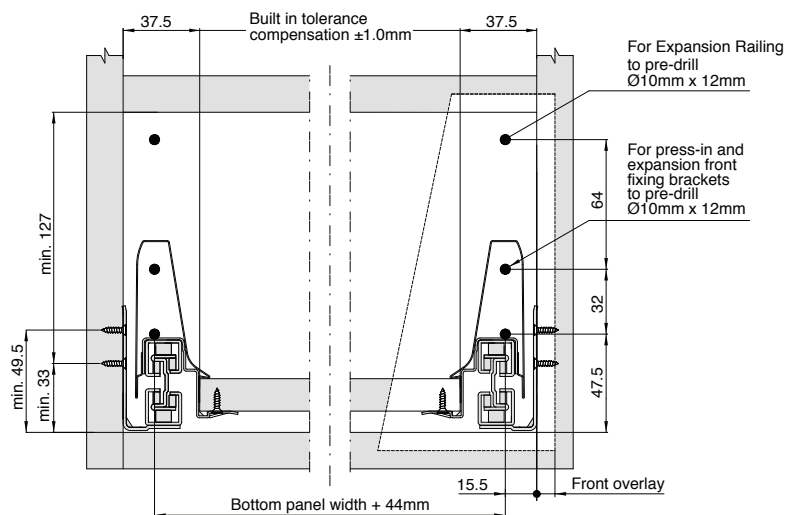

Back Installation Dimensions

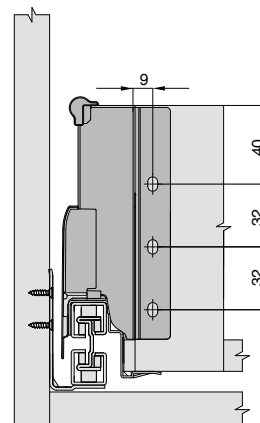

Cabinet Profile Screw Positions

TM13S

Drawer Length


Min. internal cabinet depth = drawer length + 3 mm
Actual loss of extension = 0 mm

270, 300, 350 mm

400 mm

450 mm

500, 550 mm

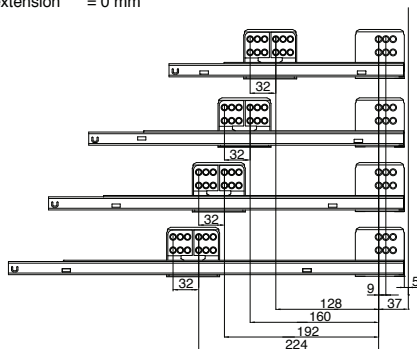

TM16S

Drawer Length


Min. internal cabinet depth = drawer length + 3 mm
Actual loss of extension = 0 mm

400 mm

450 mm

500, 550 mm


600, 650 mm

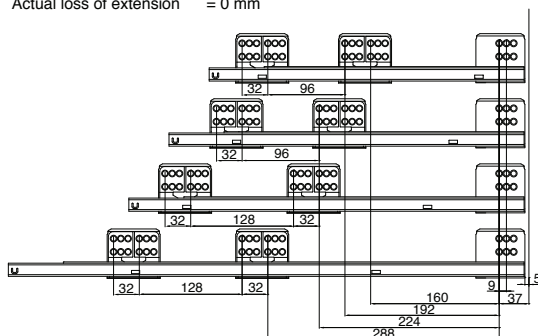

Cutting Dimensions for 16mm Chipboard

Back panel

Width = internal cabinet width - 87mm
Height = 135mm

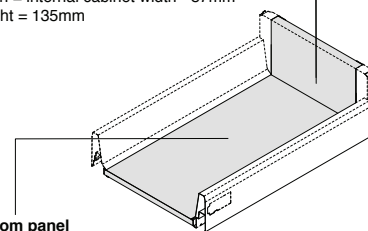






Bottom panel

Width = Internal cabinet width - 75mm
Length (Wooden Back) = drawer length - 24 mm
Length (Steel Back) = drawer length - 22 mm




- Roller bearing concealed runners
- Full extension with synchro control
- Steel drawer side **83mm**
- Load capacity of **35kg** or **60kg**
- Quick assembly
- Flexible 3-dimensional front adjustment
- **Sylent** integrated cushioning system
- Integrated lateral stabiliser

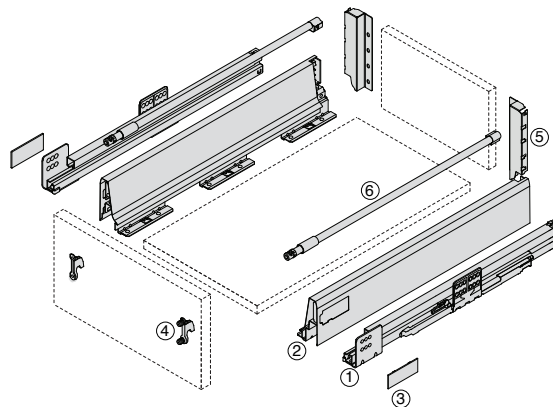


 	Cabinet Profile Left / Right : galvanised		 	Drawer Side Left / Right :	 	Railing Set Left / Right :
Drawer Length	35kg	60kg			Inclusive of Screw-on and Expansion railing adaptor	
	Left/Right to be ordered separately		Left/Right to be ordered separately			
	270mm	TM13S.27.GI		TD23.27.XX	RRA2.222.XX	
	300mm	TM13S.30.GI		TD23.30.XX	RRA2.252.XX	
	350mm	TM13S.35.GI		TD23.35.XX	RRA2.302.XX	
	400mm	TM13S.40.GI	TM16S.40.GI	TD23.40.XX	RRA2.352.XX	
	450mm	TM13S.45.GI	TM16S.45.GI	TD23.45.XX	RRA2.402.XX	
	500mm	TM13S.50.GI	TM16S.50.GI	TD23.50.XX	RRA2.452.XX	
	550mm	TM13S.55.GI	TM16S.55.GI	TD23.55.XX	RRA2.502.XX	
	600mm		TM16S.60.GI	TD23.60.XX	RRA2.552.XX	
650mm		TM16S.65.GI	TD23.65.XX	RRA2.602.XX		
 	Cover Cap-harn Logo					
	2X	RBC.62230-L1.XX				
 	Front Fixing Bracket					
	 Screw-on	2X	RBF.21130.GI			
	 Press-in	2X	RBF.22130.GI			
	 Expansion	2X	RBF.23130.GI			
 	Rear Fixing Bracket Left / Right :					
	Left/Right to be ordered separately					
		RBR.74330.XX				
	Steel Back	n/a				

Space Requirements and Front Installation Dimensions

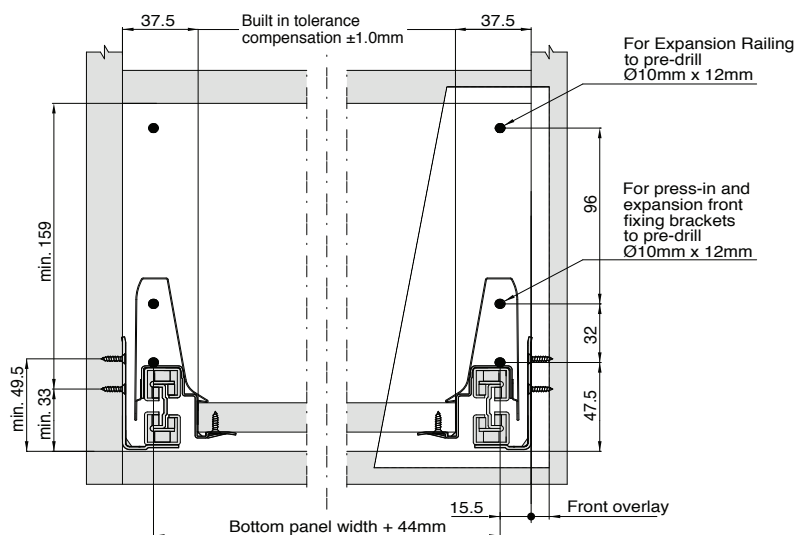

Back Installation Dimensions

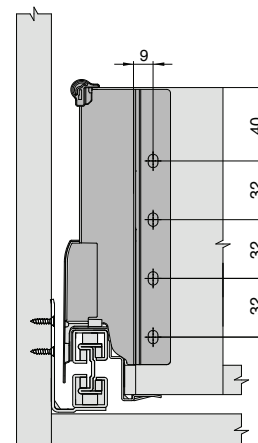

Cabinet Profile Screw Positions

TM13S

Drawer Length


Min. internal cabinet depth = drawer length + 3 mm
Actual loss of extension = 0 mm

270, 300, 350 mm

400 mm

450 mm

500, 550 mm

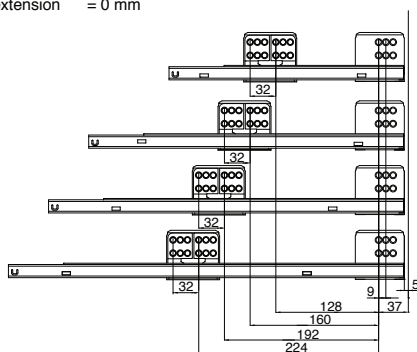

TM16S

Drawer Length


Min. internal cabinet depth = drawer length + 3 mm
Actual loss of extension = 0 mm

400 mm

450 mm

500, 550 mm


600, 650 mm

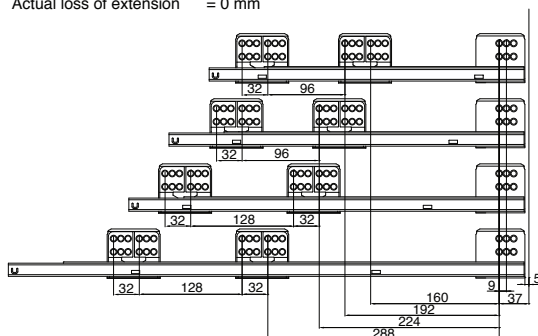

Cutting Dimensions for 16mm Chipboard

Back panel

Width = internal cabinet width - 87mm
Height = 167mm

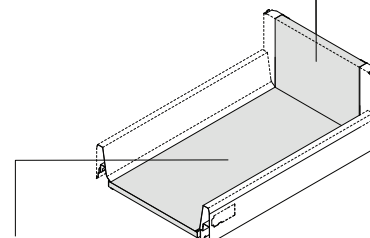








Bottom panel

Width = Internal cabinet width - 75mm
Length (Wooden Back) = drawer length - 24 mm
Length (Steel Back) = drawer length - 22 mm




- Roller bearing concealed runners
- Full extension with synchro control
- Steel drawer side **83mm**
- Load capacity of **35kg & 60kg**
- Quick assembly
- Flexible 3-dimensional front adjustment
- **Sylent** integrated cushioning system
- Integrated lateral stabiliser

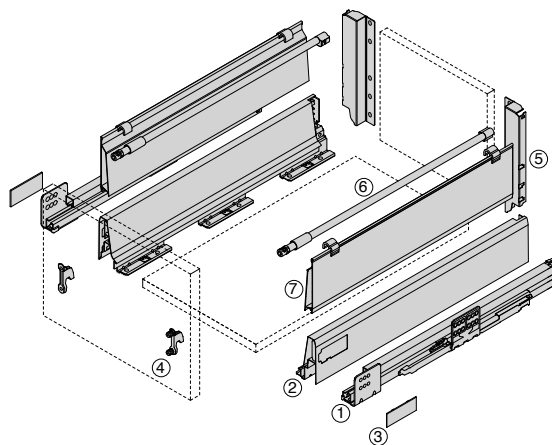


	Cabinet Profile Left / Right : galvanised			Drawer Side Left / Right :		Railing Set Left / Right :
Drawer Length	35kg	60kg			Inclusive of Screw-on and Expansion railing adaptor	
	Left/Right to be ordered separately		Left/Right to be ordered separately			
270mm	TM13S.27.GI			TD23.27.XX		RRA2.222.XX
300mm	TM13S.30.GI			TD23.30.XX		RRA2.252.XX
350mm	TM13S.35.GI			TD23.35.XX		RRA2.302.XX
400mm	TM13S.40.GI	TM16S.40.GI		TD23.40.XX		RRA2.352.XX
450mm	TM13S.45.GI	TM16S.45.GI		TD23.45.XX		RRA2.402.XX
500mm	TM13S.50.GI	TM16S.50.GI		TD23.50.XX		RRA2.452.XX
550mm	TM13S.55.GI	TM16S.55.GI		TD23.55.XX		RRA2.502.XX
600mm		TM16S.60.GI		TD23.60.XX		RRA2.552.XX
650mm		TM16S.65.GI		TD23.65.XX		RRA2.602.XX
	Cover Cap-harn Logo			Side Extend Left / Right :		
	2X	RBC.62230-L1.XX				
	Front Fixing Bracket		Drawer Length	Double-wall		
	 Screw-on	2X RBF.21130.GI	270mm	RSE2-HD.243.XX		
	 Press-in	2X RBF.22130.GI	300mm	RSE2-HD.273.XX		
	 Expansion	2X RBF.23130.GI	350mm	RSE2-HD.323.XX		
			400mm	RSE2-HD.373.XX		
			450mm	RSE2-HD.423.XX		
			500mm	RSE2-HD.473.XX		
			550mm	RSE2-HD.523.XX		
			600mm	RSE2-HD.573.XX		
			650mm	RSE2-HD.623.XX		
	Rear Fixing Bracket Left / Right :					
	Left/Right to be ordered separately					
		RBR.75330.XX				
	Steel Back	see page 60				

Space Requirements and Front Installation Dimensions

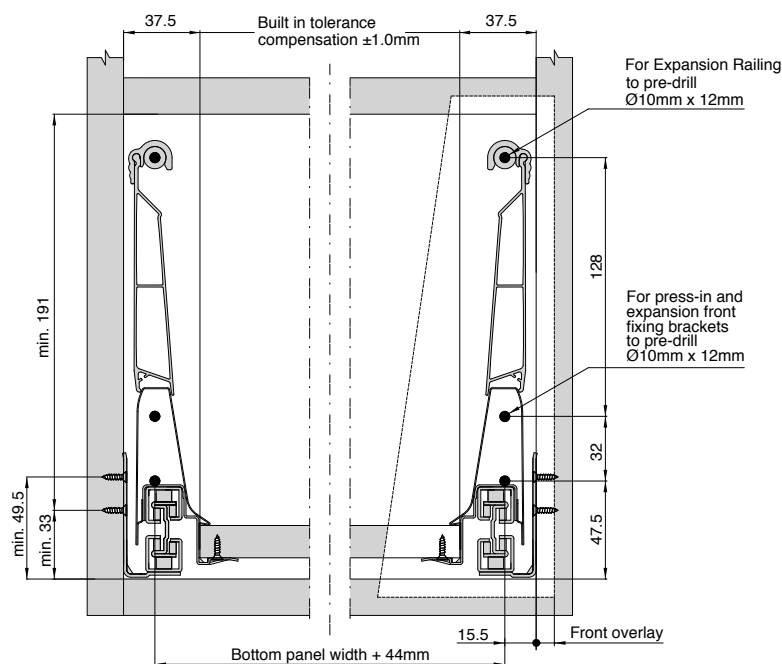

Back Installation Dimensions

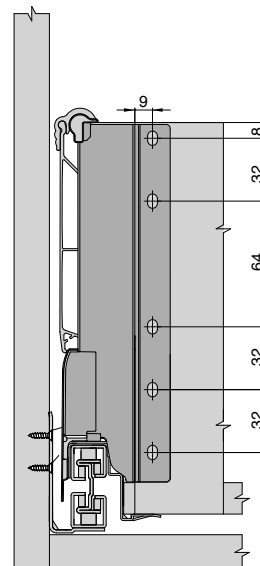

Cabinet Profile Screw Positions

TM13S

Drawer Length


Min. internal cabinet depth = drawer length + 3 mm
Actual loss of extension = 0 mm

270, 300, 350 mm

400 mm

450 mm

500, 550 mm

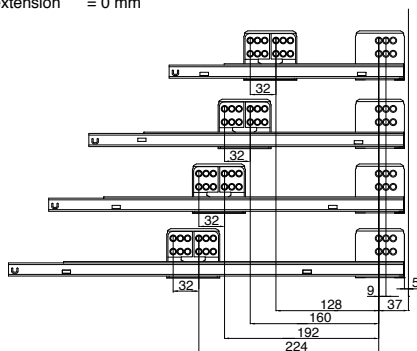

TM16S

Drawer Length


Min. internal cabinet depth = drawer length + 3 mm
Actual loss of extension = 0 mm

400 mm

450 mm

500, 550 mm


600, 650 mm

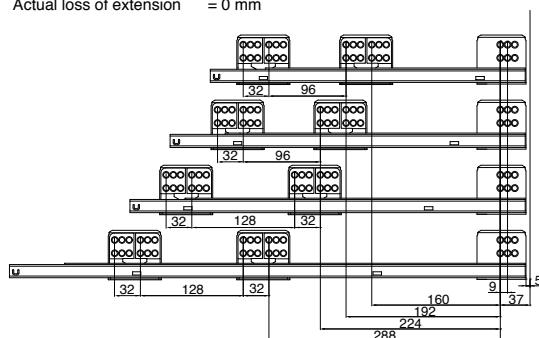

Cutting Dimensions for 16mm Chipboard

Back panel

Width = internal cabinet width - 87mm
Height = 199mm

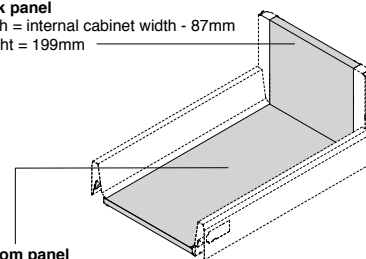











Bottom panel

Width = Internal cabinet width - 75mm
Length (Wooden Back) = drawer length - 24 mm
Length (Steel Back) = drawer length - 22 mm




- Roller bearing concealed runners
- Full extension with synchro control
- Steel drawer side **83mm**
- Load capacity of **35kg** or **60kg**
- Quick assembly
- **Sylent** integrated cushioning system
- Integrated lateral stabiliser

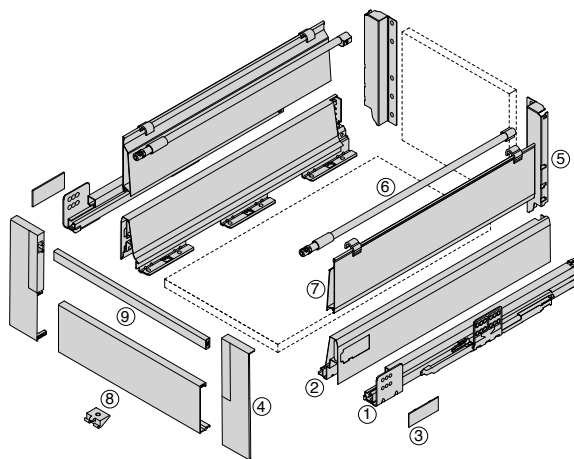


	Cabinet Profile Left / Right : galvanised			Drawer Side Left / Right :		Railing Set Left / Right :
Drawer Length	35kg	60kg			Inclusive of Screw-on and Expansion railing adaptor	
	Left/Right to be ordered separately		Left/Right to be ordered separately			
	270mm	TM13S.27.GI		TD23.27.XX		RRA2.222.XX
	300mm	TM13S.30.GI		TD23.30.XX		RRA2.252.XX
	350mm	TM13S.35.GI		TD23.35.XX		RRA2.302.XX
	400mm	TM13S.40.GI	TM16S.40.GI	TD23.40.XX		RRA2.352.XX
	450mm	TM13S.45.GI	TM16S.45.GI	TD23.45.XX		RRA2.402.XX
	500mm	TM13S.50.GI	TM16S.50.GI	TD23.50.XX		RRA2.452.XX
	550mm	TM13S.55.GI	TM16S.55.GI	TD23.55.XX		RRA2.502.XX
	600mm		TM16S.60.GI	TD23.60.XX		RRA2.552.XX
650mm		TM16S.65.GI	TD23.65.XX		RRA2.602.XX	
	Cover Cap-harn Logo			Side Extend Left / Right :		Front Panel
	2X	RBC.62230-L1.XX				
	Front Fixing Bracket Left / Right :		Drawer Length	Double-wall	Cabinet Width (16mm side panel)	Cut to required width
		RBF.55330.XX	270mm	RSE2-HD.243.XX	1200mm	RPF870.1035.XX
		Included one piece 208.000 & screws	300mm	RSE2-HD.273.XX		Rectangular Cross Railing
			350mm	RSE2-HD.323.XX		
			400mm	RSE2-HD.373.XX		
			450mm	RSE2-HD.423.XX		
			500mm	RSE2-HD.473.XX		
	Rear Fixing Bracket Left / Right :		550mm	RSE2-HD.523.XX	Cabinet Width (16mm side panel)	Cut to required width
	Left/Right to be ordered separately		600mm	RSE2-HD.573.XX	1200mm	RRF2.1045.XX
		RBR.75330.XX	650mm	RSE2-HD.623.XX		
	Steel Back	see page 60				

Space Requirements and Front Installation Dimensions

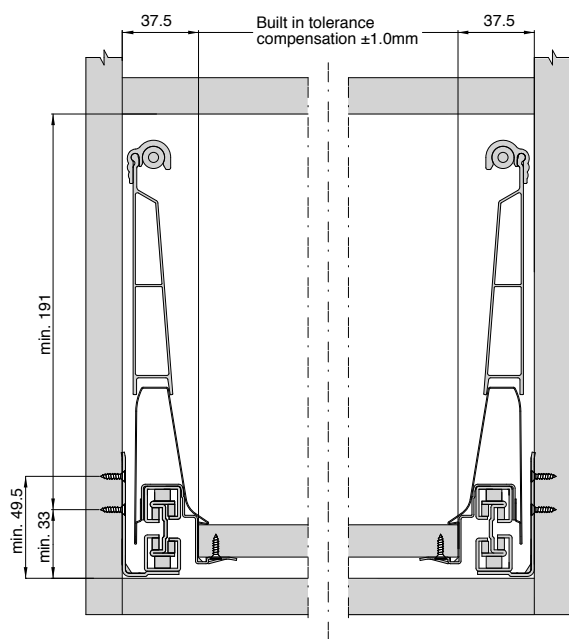

Back Installation Dimensions

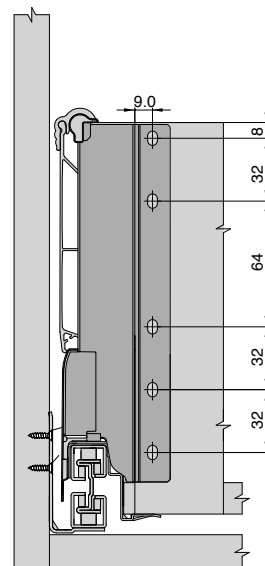

Cabinet Profile Screw Positions

TM13S

Drawer Length


Min. internal cabinet depth = drawer length + 3 mm
Actual loss of extension = 0 mm

270, 300, 350 mm

400 mm

450 mm

500, 550 mm

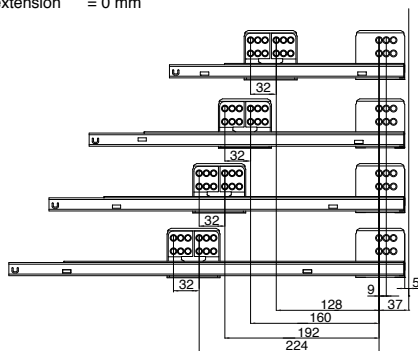

TM16S

Drawer Length


Min. internal cabinet depth = drawer length + 3 mm
Actual loss of extension = 0 mm

400 mm

450 mm

500, 550 mm


600, 650 mm

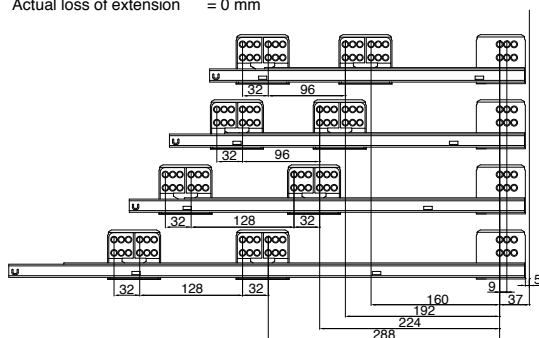

Cutting Dimensions for 16mm Chipboard

Back panel


Width = internal cabinet width - 87mm
Height = 199mm

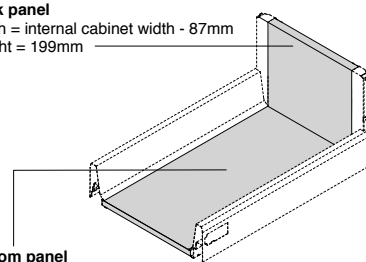


Bottom panel

Width = Internal cabinet width - 75mm
Length (Wooden Back) = drawer length - 24 mm
Length (Steel Back) = drawer length - 22 mm

Cutting Dimensions for Front Panel (RPF870)










Cutting Dimensions for Rectangular Cross Railing






- Roller bearing concealed runners
- Full extension with synchro control
- Steel drawer side **83mm**
- Load capacity of **35kg** or **60kg**
- Quick assembly
- Flexible 3-dimensional front adjustment
- **Sylent** integrated cushioning system
- Integrated lateral stabiliser

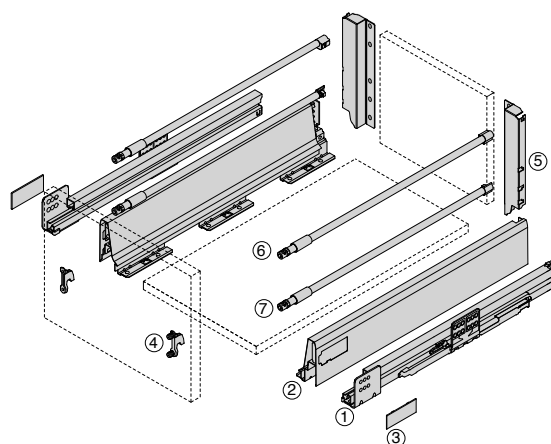


	Cabinet Profile Left / Right : galvanised			Drawer Side Left / Right :		Railing Set Left / Right :
Drawer Length	35kg	60kg			Inclusive of Screw-on and Expansion railing adaptor	
	Left/Right to be ordered separately					
270mm	TM13S.27.GI		TD23.27.XX		RRA2.222.XX	
300mm	TM13S.30.GI		TD23.30.XX		RRA2.252.XX	
350mm	TM13S.35.GI		TD23.35.XX		RRA2.302.XX	
400mm	TM13S.40.GI	TM16S.40.GI	TD23.40.XX		RRA2.352.XX	
450mm	TM13S.45.GI	TM16S.45.GI	TD23.45.XX		RRA2.402.XX	
500mm	TM13S.50.GI	TM16S.50.GI	TD23.50.XX		RRA2.452.XX	
550mm	TM13S.55.GI	TM16S.55.GI	TD23.55.XX		RRA2.502.XX	
600mm		TM16S.60.GI	TD23.60.XX		RRA2.552.XX	
650mm		TM16S.65.GI	TD23.65.XX		RRA2.602.XX	
	Cover Cap-harn Logo			Double Railing Left / Right :		
	2X	RBC.62230-L1.XX		Inclusive of Screw-on and Expansion railing adaptor		
	Front Fixing Bracket		270mm	RRA4.222.XX		
	 Screw- on	2X RBF.21130.GI	300mm	RRA4.252.XX		
	 Press-in	2X RBF.22130.GI	350mm	RRA4.302.XX		
	 Expansion	2X RBF.23130.GI	400mm	RRA4.352.XX		
	Rear Fixing Bracket Left / Right :		450mm	RRA4.402.XX		
	Left/Right to be ordered separately		500mm	RRA4.452.XX		
			550mm	RRA4.502.XX		
			600mm	RRA4.552.XX		
			650mm	RRA4.602.XX		
	Steel Back see page 60					

Space Requirements and Front Installation Dimensions

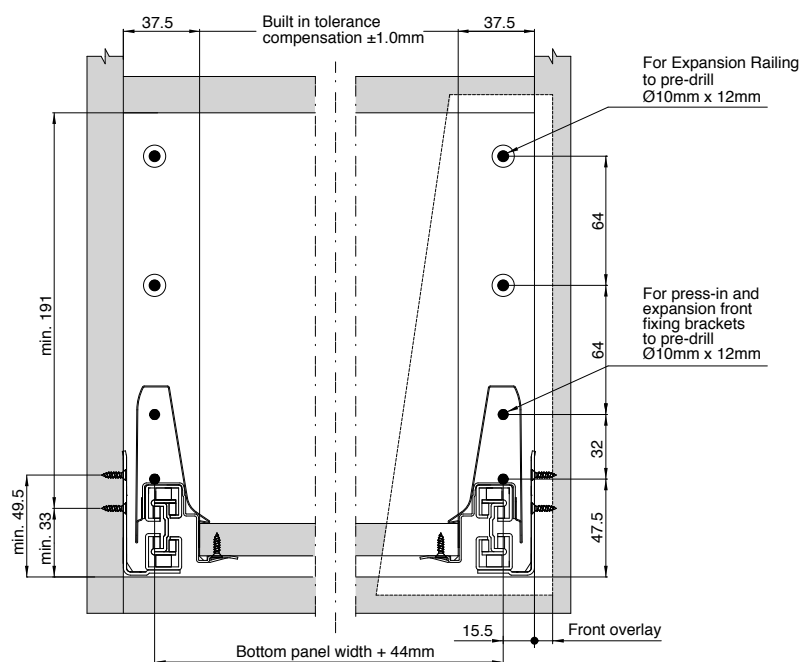

Back Installation Dimensions

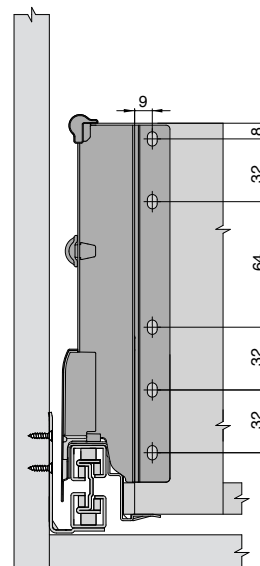

Cabinet Profile Screw Positions

TM13S

Drawer Length


Min. internal cabinet depth = drawer length + 3 mm
Actual loss of extension = 0 mm

270, 300, 350 mm

400 mm

450 mm

500, 550 mm

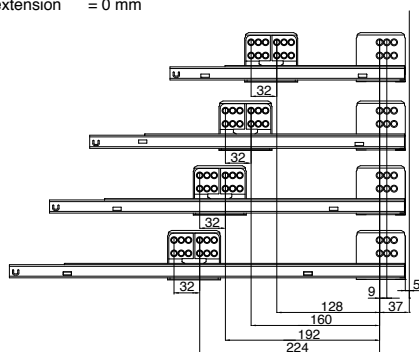

TM16S

Drawer Length


Min. internal cabinet depth = drawer length + 3 mm
Actual loss of extension = 0 mm

400 mm

450 mm

500, 550 mm


600, 650 mm

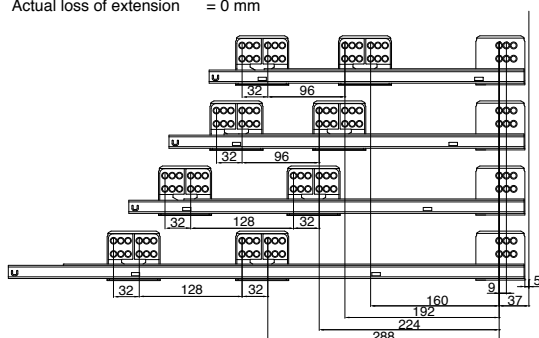

Cutting Dimensions for 16mm Chipboard

Back panel

Width = internal cabinet width - 87mm
Height = 199mm

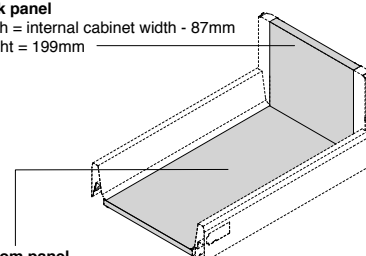










Bottom panel

Width = Internal cabinet width - 75mm
Length (Wooden Back) = drawer length - 24 mm
Length (Steel Back) = drawer length - 22 mm




- Roller bearing concealed runners
- Full extension with synchro control
- Steel drawer side **83mm**
- Load capacity of **35kg** or **60kg**
- Quick assembly
- **Sylent** integrated cushioning system
- Integrated lateral stabiliser

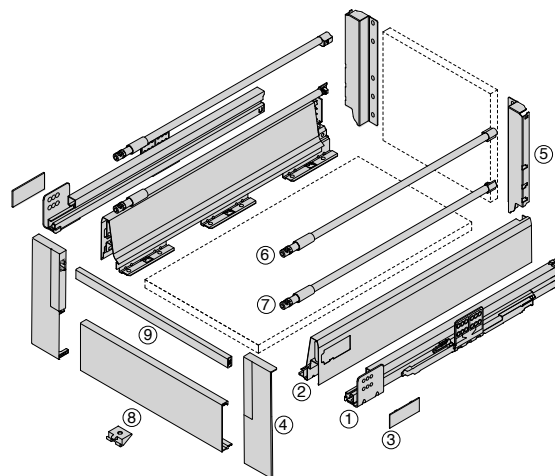


	Cabinet Profile Left / Right : galvanised			Drawer Side Left / Right :		Railing Set Left / Right :	
Drawer Length	35kg	60kg			Inclusive of Screw-on and Expansion railing adaptor		
	Left/Right to be ordered separately		Left/Right to be ordered separately				
	270mm	TM13S.27.GI		TD23.27.XX	RRA2.222.XX		
	300mm	TM13S.30.GI		TD23.30.XX	RRA2.252.XX		
	350mm	TM13S.35.GI		TD23.35.XX	RRA2.302.XX		
	400mm	TM13S.40.GI	TM16S.40.GI	TD23.40.XX	RRA2.352.XX		
	450mm	TM13S.45.GI	TM16S.45.GI	TD23.45.XX	RRA2.402.XX		
	500mm	TM13S.50.GI	TM16S.50.GI	TD23.50.XX	RRA2.452.XX		
	550mm	TM13S.55.GI	TM16S.55.GI	TD23.55.XX	RRA2.502.XX		
	600mm		TM16S.60.GI	TD23.60.XX	RRA2.552.XX		
	650mm		TM16S.65.GI	TD23.65.XX	RRA2.602.XX		
		Cover Cap-harn Logo			Front Panel		Railing Set Left / Right :
	2X	RBC.62230-L1.XX					
	Front Fixing Bracket Left / Right :		Cabinet Width (16mm side panel)	Cut to required width	Inclusive of Screw-on and Expansion railing adaptor		
		RBF.55330.XX	1200mm	RPF870.1035.XX	270mm	RRA4.222.XX	
		Included one piece 208.000 & screws		Rectangular Cross Railing	300mm	RRA4.252.XX	
			350mm		RRA4.302.XX		
			400mm		RRA4.352.XX		
			450mm		RRA4.402.XX		
			500mm		RRA4.452.XX		
	Rear Fixing Bracket Left / Right :		Cabinet Width (16mm side panel)	Cut to required width	550mm	RRA4.502.XX	
	Left/Right to be ordered separately		1200mm	RRF2.1045.XX	600mm	RRA4.552.XX	
		RBR.75330.XX			650mm	RRA4.602.XX	
	Steel Back	see page 60					

Space Requirements and Front Installation Dimensions

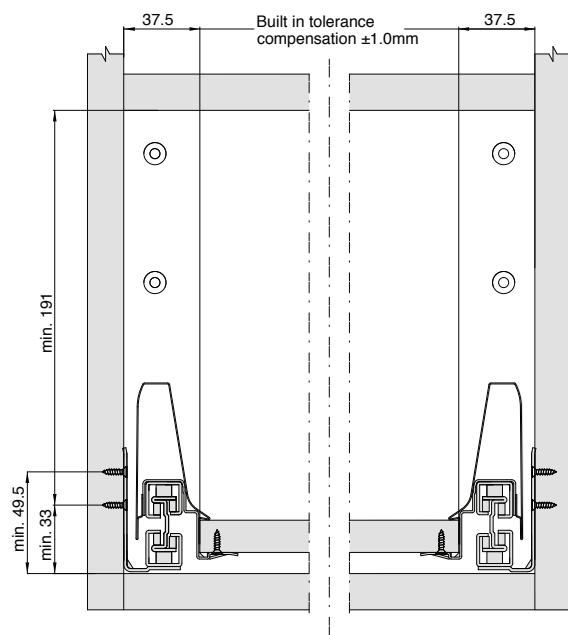

Back Installation Dimensions

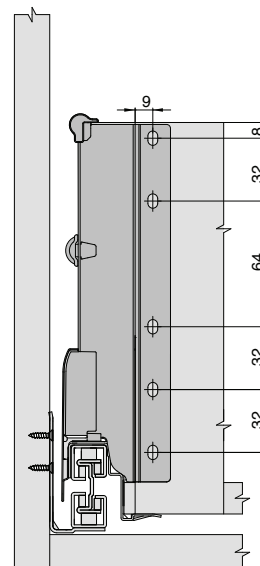

Cabinet Profile Screw Positions

TM13S

Drawer Length


Min. internal cabinet depth = drawer length + 3 mm
Actual loss of extension = 0 mm

270, 300, 350 mm

400 mm

450 mm

500, 550 mm

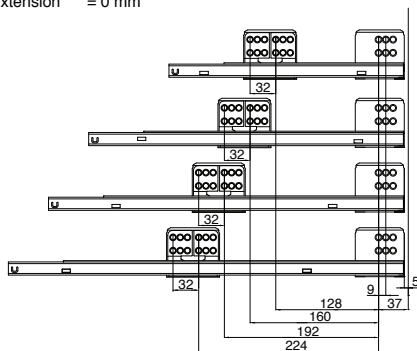

TM16S

Drawer Length


Min. internal cabinet depth = drawer length + 3 mm
Actual loss of extension = 0 mm

400 mm

450 mm

500, 550 mm


600, 650 mm

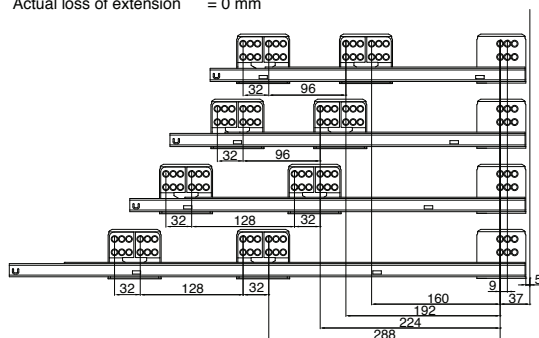

Cutting Dimensions for 16mm Chipboard

Back panel


Width = internal cabinet width - 87mm
Height = 199mm

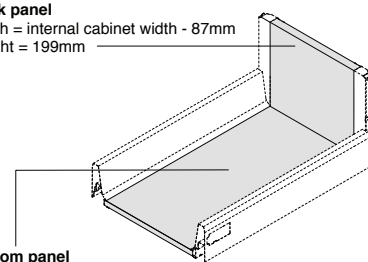


Bottom panel


Width = Internal cabinet width - 75mm
Length (Wooden Back) = drawer length - 24 mm
Length (Steel Back) = drawer length - 22 mm

Cutting Dimensions for Front Panel (RPF870)




Cutting Dimensions for Rectangular Cross Railing




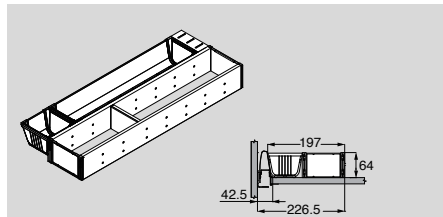


Drawer Length	
450mm	RCI.45S2.SS
500mm	RCI.50S2.SS
550mm	RCI.55S2.SS

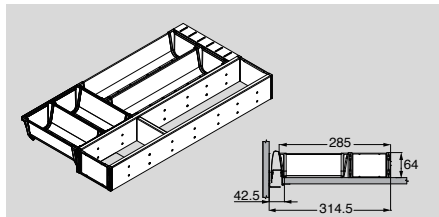


Drawer Length	
450mm	RCI.45D3.SS
500mm	RCI.50D3.SS
550mm	RCI.55D3.SS

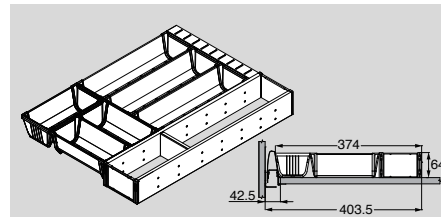


Drawer Length	
450mm	RCI.45T4.SS
500mm	RCI.50T4.SS
550mm	RCI.55T4.SS

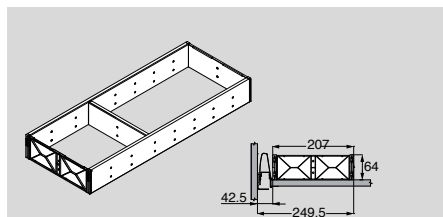


Drawer Length	
450mm	RCI.45U2.SS
500mm	RCI.50U2.SS
550mm	RCI.55U2.SS

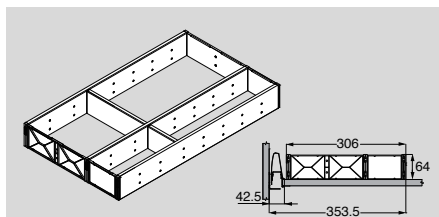


Drawer Length	
450mm	RCI.45U3.SS
500mm	RCI.50U3.SS
550mm	RCI.55U3.SS

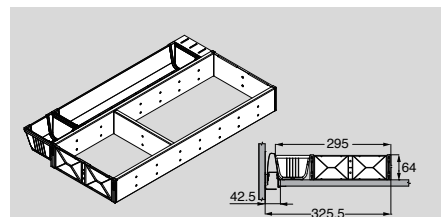


Drawer Length	
450mm	RCI.45S3U.SS
500mm	RCI.50S3U.SS
550mm	RCI.55S3U.SS

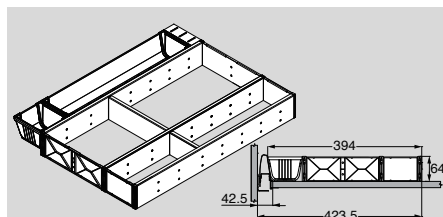


Drawer Length	
450mm	RCI.45S4U.SS
500mm	RCI.50S4U.SS
550mm	RCI.55S4U.SS

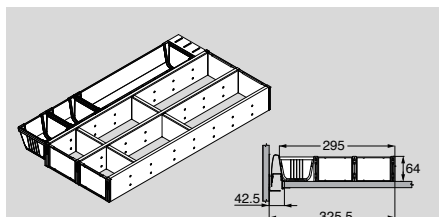

Drawer Length	
450mm	RCI.45S3M.SS
500mm	RCI.50S3M.SS
550mm	RCI.55S3M.SS

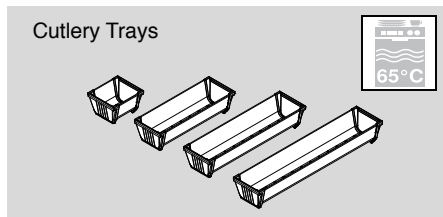


Length	
88x88mm	RCI.110.A2
88x176mm	RCI.110.A3
88x264mm	RCI.110.A4
88x352mm	RCI.110.A5

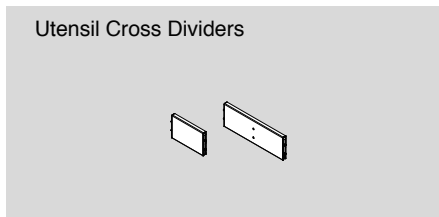













Width	
88mm	RCI.110.A9
187mm	RCI.110.A10














Dimensions for Utensil Dividers











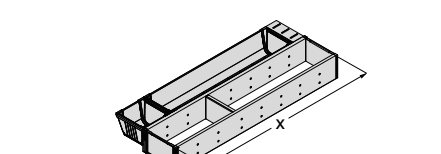















$X = \text{Drawer Length} - 26\text{mm}$











Cutlery


Cabinet width	Drawer Length					
		RCI.XXS2.SS	RCI.XXD3.SS	RCI.XXT4.SS	RCI.XXU2.SS	
 300-400	450mm	RCI.45S2.SS x1				
	500mm	RCI.50S2.SS x1				
	550mm	RCI.55S2.SS x1				
 450-500	450mm		RCI.45D3.SS x1			
	500mm		RCI.50D3.SS x1			
	550mm		RCI.55D3.SS x1			
 550-600	450mm			RCI.45T4.SS x1		
	500mm			RCI.50T4.SS x1		
	550mm			RCI.55T4.SS x1		
 700	450mm	RCI.45S2.SS x1	RCI.45D3.SS x1			
	500mm	RCI.50S2.SS x1	RCI.50D3.SS x1			
	550mm	RCI.55S2.SS x1	RCI.55D3.SS x1			
 800	450mm		RCI.45D3.SS x2			
	500mm		RCI.50D3.SS x2			
	550mm		RCI.55D3.SS x2			
 900	450mm		RCI.45D3.SS x1	RCI.45T4.SS x1		
	500mm		RCI.50D3.SS x1	RCI.50T4.SS x1		
	550mm		RCI.55D3.SS x1	RCI.55T4.SS x1		
 1000	450mm			RCI.45T4.SS x2		
	500mm			RCI.50T4.SS x2		
	550mm			RCI.55T4.SS x2		
 1200	450mm		RCI.45D3.SS x1	RCI.45T4.SS x1	RCI.45U2.SS x1	
	500mm		RCI.50D3.SS x1	RCI.50T4.SS x1	RCI.50U2.SS x1	
	550mm		RCI.55D3.SS x1	RCI.55T4.SS x1	RCI.55U2.SS x1	

Miscellaneous						
Cabinet width	Drawer Length					
						
		RCI.XXS2.SS	RCI.XXU2.SS	RCI.XXU3.SS	RCI.XX4U.SS	RCI.XXS3M.SS
300-400 	450mm	RCI.45S2.SS x1				
	500mm	RCI.50S2.SS x1				
	550mm	RCI.55S2.SS x1				
450-500 	450mm					RCI.45S3M.SS x1
	500mm					RCI.50S3M.SS x1
	550mm					RCI.55S3M.SS x1
550-600 	450mm	RCI.45S2.SS x2				
	500mm	RCI.50S2.SS x2				
	550mm	RCI.55S2.SS x2				
700 	450mm	RCI.45S2.SS x1				RCI.45S3M.SS x1
	500mm	RCI.50S2.SS x1				RCI.50S3M.SS x1
	550mm	RCI.55S2.SS x1				RCI.55S3M.SS x1
800 	450mm					RCI.45S3M.SS x2
	500mm					RCI.50S3M.SS x2
	550mm					RCI.55S3M.SS x2
900 	450mm				RCI.45S4U.SS x1	RCI.45S3M.SS x1
	500mm				RCI.50S4U.SS x1	RCI.50S3M.SS x1
	550mm				RCI.55S4U.SS x1	RCI.55S3M.SS x1
1000 	450mm	RCI.45S2.SS x1	RCI.45U2.SS x1			RCI.45S3M.SS x1
	500mm	RCI.50S2.SS x1	RCI.50U2.SS x1			RCI.50S3M.SS x1
	550mm	RCI.55S2.SS x1	RCI.55U2.SS x1			RCI.55S3M.SS x1
1200 	450mm			RCI.45U3.SS x1		RCI.45S3M.SS x2
	500mm			RCI.50U3.SS x1		RCI.50S3M.SS x2
	550mm			RCI.55U3.SS x1		RCI.55S3M.SS x2

Cleaning						
Cabinet width	Drawer Length					
		RCI.XXS2.SS	RCI.XXU2.SS	RCI.XXU3.SS	RCI.XXS3U.SS	RCI.XX4U.SS
600 	450mm					RCI.45S4U.SS x1
	500mm					RCI.50S4U.SS x1
	550mm					RCI.55S4U.SS x1
700 	450mm	RCI.45S2.SS x1			RCI.45S3U.SS x1	
	500mm	RCI.50S2.SS x1			RCI.50S3U.SS x1	
	550mm	RCI.55S2.SS x1			RCI.55S3U.SS x1	
800 	450mm				RCI.45S3U.SS x2	
	500mm				RCI.50S3U.SS x2	
	550mm				RCI.55S3U.SS x2	
900 	450mm				RCI.45S3U.SS x1	RCI.45S4U.SS x1
	500mm				RCI.50S3U.SS x1	RCI.50S4U.SS x1
	550mm				RCI.55S3U.SS x1	RCI.55S4U.SS x1
1000 	450mm	RCI.45S2.SS x1	RCI.45U2.SS x1		RCI.45S3U.SS x1	
	500mm	RCI.50S2.SS x1	RCI.50U2.SS x1		RCI.50S3U.SS x1	
	550mm	RCI.55S2.SS x1	RCI.55U2.SS x1		RCI.55S3U.SS x1	
1200 	450mm			RCI.45U3.SS x1	RCI.45S3U.SS x2	
	500mm			RCI.50U3.SS x1	RCI.50S3U.SS x2	
	550mm			RCI.55U3.SS x1	RCI.55S3U.SS x2	


Preparation						
Cabinet width	Drawer Length					
		RCI.XXS2.SS	RCI.XXU2.SS	RCI.XXU3.SS	RCI.XXS3U.SS	RCI.XX4U.SS
300 	450mm	RCI.45S2.SS x1				
	500mm	RCI.50S2.SS x1				
	550mm	RCI.55S2.SS x1				
400-500 	450mm		RCI.45U2.SS x1			
	500mm		RCI.50U2.SS x1			
	550mm		RCI.55U2.SS x1			
550 	450mm				RCI.45S3U.SS x1	
	500mm				RCI.50S3U.SS x1	
	550mm				RCI.55S3U.SS x1	
600-700 	450mm					RCI.45S4U.SS x1
	500mm					RCI.50S4U.SS x1
	550mm					RCI.55S4U.SS x1
800 	450mm				RCI.45S3U.SS x2	
	500mm				RCI.50S3U.SS x2	
	550mm				RCI.55S3U.SS x2	
900 	450mm				RCI.45S3U.SS x1	RCI.45S4U.SS x1
	500mm				RCI.50S3U.SS x1	RCI.50S4U.SS x1
	550mm				RCI.55S3U.SS x1	RCI.55S4U.SS x1
1000 	450mm	RCI.45S2.SS x1	RCI.45U2.SS x1		RCI.45S3U.SS x1	
	500mm	RCI.50S2.SS x1	RCI.50U2.SS x1		RCI.50S3U.SS x1	
	550mm	RCI.55S2.SS x1	RCI.55U2.SS x1		RCI.55S3U.SS x1	
1200 	450mm			RCI.45U3.SS x1	RCI.45S3U.SS x2	
	500mm			RCI.50U3.SS x1	RCI.50S3U.SS x2	
	550mm			RCI.55U3.SS x1	RCI.55S3U.SS x2	


Cooking Utensil						
Cabinet width	Drawer Length					
		RCI.XXS2.SS	RCI.XXU2.SS	RCI.XXU3.SS	RCI.XXS3U.SS	RCI.XX4U.SS
600-700 	450mm					RCI.45S4U.SS x1
	500mm					RCI.50S4U.SS x1
	550mm					RCI.55S4U.SS x1
800 	450mm				RCI.45S3U.SS x2	
	500mm				RCI.50S3U.SS x2	
	550mm				RCI.55S3U.SS x2	
900 	450mm				RCI.45S3U.SS x1	RCI.45S4U.SS x1
	500mm				RCI.50S3U.SS x1	RCI.50S4U.SS x1
	550mm				RCI.55S3U.SS x1	RCI.55S4U.SS x1
1000 	450mm	RCI.45S2.SS x1	RCI.45U2.SS x1		RCI.45S3U.SS x1	
	500mm	RCI.50S2.SS x1	RCI.50U2.SS x1		RCI.50S3U.SS x1	
	550mm	RCI.55S2.SS x1	RCI.55U2.SS x1		RCI.55S3U.SS x1	
1200 	450mm			RCI.45U3.SS x1	RCI.45S3U.SS x2	
	500mm			RCI.50U3.SS x1	RCI.50S3U.SS x2	
	550mm			RCI.55U3.SS x1	RCI.55S3U.SS x2	

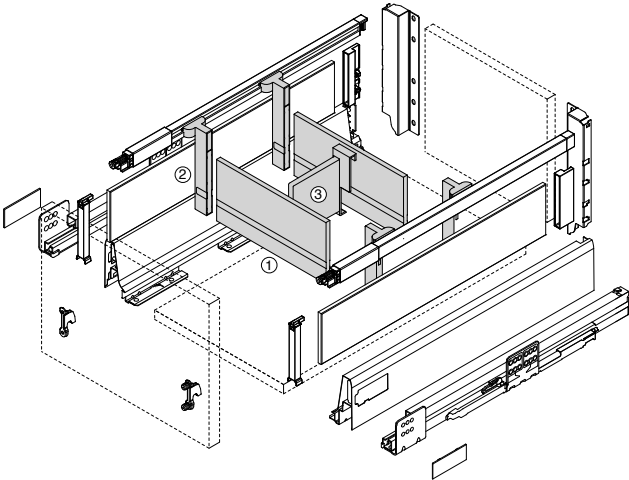

①		Divider Panel	②		Divider Panel Connector Left / Right :	③		Lateral Divider
	Cabinet Width (16mm side panel)	Cut to required width			RPC.6200.XX			RLD.6700.XX
	1200mm	RPD2.1092.XX						


Cutting Dimensions for Divider Panel



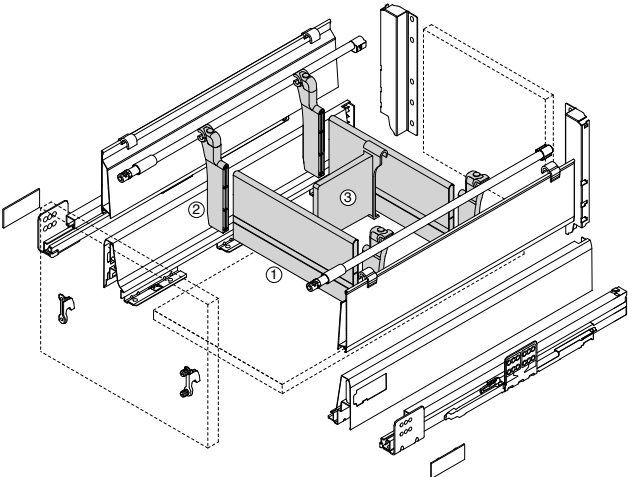



①		Divider Panel	②		Divider Panel Connector Left / Right :	③		Lateral Divider
Cabinet Width (16mm side panel)		Cut to required width	RPC.6100N.XX			RLD.6600.XX		
1200mm		RPD.1081.XX						

Cutting Dimensions for Divider Panel




Divider Panel


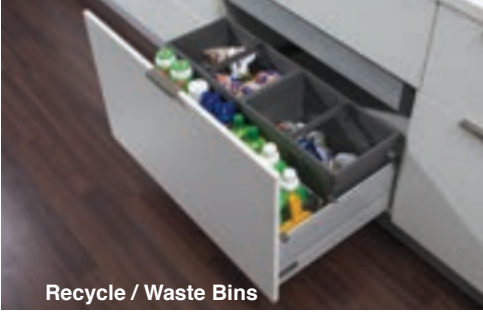
	Drawer Length	Cabinet width			
			Divider Panel	Divider Panel Connector	Lateral Divider
 Provisions	450	300-400	x 1	x 1	
	450	450-600	x 1	x 1	x 2
	450	800-1200	x 1	x 1	x 3
	500,550	300-400	x 2	x 2	
	500,550	450-600	x 2	x 2	x 3
	500,550	800-1200	x 2	x 2	x 6
 Crockery	450,500,550	400-550	x 1	x 1	
	450,500,550	600-800	x 1	x 1	x 2
	450,500,550	900-1000	x 1	x 1	x 4
 Plastic Containers	450,500,550	300-400	x 1	x 1	
	450,500,550	450-600	x 1	x 1	x 2
	450,500,550	800-1200	x 1	x 1	x 3
 Cleaning	450,500,550	900-1200	x 2	x 2	
 Recycle / Waste Bins	450,500,550	900-1200	x 2	x 2	x 5

Divider Panel					
	Drawer Length	Cabinet width			
			Divider Panel	Divider Panel Connector	Lateral Divider
 Open Provisions	450	300-400	x 1	x 1	
	450	450-600	x 1	x 1	x 2
	450	800-1200	x 1	x 1	x 3
	500,550	300-400	x 2	x 2	
	500,550	450-600	x 2	x 2	x 3
	500,550	800-1200	x 2	x 2	x 6
 Bottles	450	275-300	x 3	x 3	x 2
	500,550	275-300	x 4	x 4	x 4
 Cooking Utensils	450	600	x 1	x 1	x 2
	450	800-1200	x 1	x 1	x 3
	500,550	600	x 2	x 2	x 3
	500,550	800-1200	x 2	x 2	x 6
 Baking / Ingredients	450	300-400	x 1	x 1	
	450	450-600	x 1	x 1	x 2
	450	800-1200	x 1	x 1	x 3
	500,550	300-400	x 2	x 2	
	500,550	450-600	x 2	x 2	x 3
	500,550	800-1200	x 2	x 2	x 6
					





- Roller bearing concealed runners
- Full extension with synchro control
- Steel drawer side **83mm**
- Load capacity of **35kg** or **60kg**
- Quick assembly
- Flexible 2-dimensional front adjustment
- **Sylent** integrated cushioning system
- Integrated lateral stabiliser

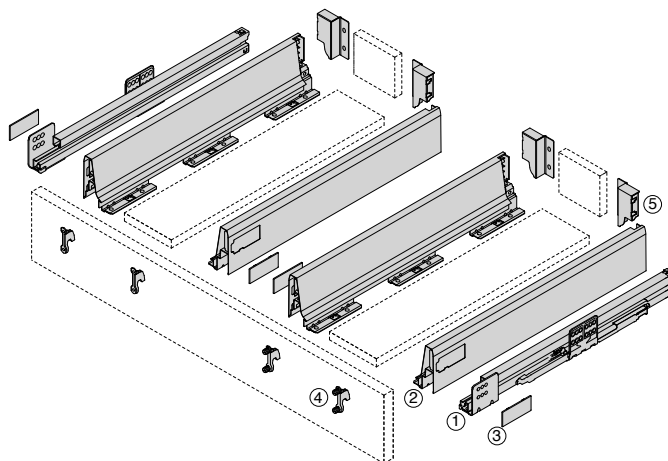

① 	Cabinet Profile Left / Right : galvanised		② 	Drawer Side Left / Right :	
	Drawer Length	35kg 60kg		Left/Right to be ordered separately	
	450mm	TM13S.45.GI TM16S.45.GI		2X	TD23.45.XX
	500mm	TM13S.50.GI TM16S.50.GI		2X	TD23.50.XX
	550mm	TM13S.55.GI TM16S.55.GI		2X	TD23.55.XX
	600mm	TM16S.60.GI		2X	TD23.60.XX
	650mm	TM16S.65.GI		2X	TD23.65.XX
③ 	Cover Cap-harn Logo				
		4X RBC.62230-L1.XX			
④ 	Front Fixing Bracket				
	 Screw-on	4X RBF.21130.GI			
	 Press-in	4X RBF.22130.GI			
	 Expansion	4X RBF.23130.GI			
⑤ 	Rear Fixing Bracket Left / Right :				
	Left/Right to be ordered separately				
		2X RBR.72330.XX			
	Steel Back	see page 60			

Space Requirements and Front Installation Dimensions

Back Installation Dimensions

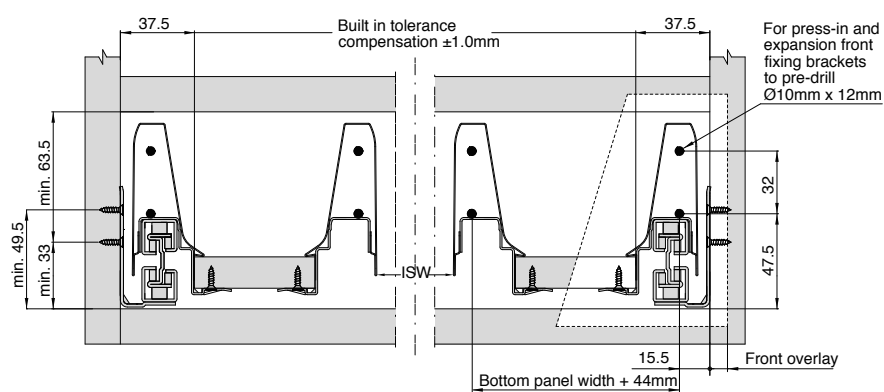

Cabinet Profile Screw Positions


TM13S

Drawer Length

Min. internal cabinet depth = drawer length + 3 mm
Actual loss of extension = 0 mm

450 mm

500, 550 mm

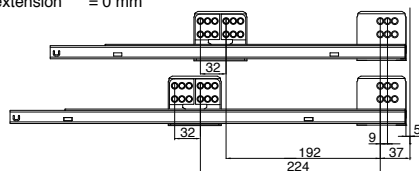

TM16S


Drawer Length

Min. internal cabinet depth = drawer length + 3 mm
Actual loss of extension = 0 mm


450 mm

500, 550 mm


600, 650 mm

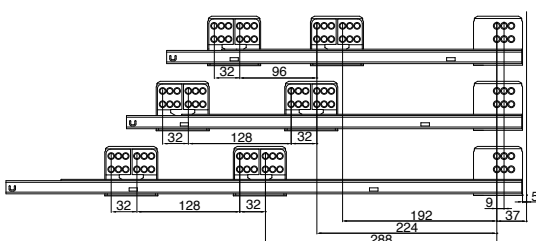

Cutting Dimension for 16mm Chipboard




Back Panel



Bottom Panel

(Wooden Back)
Drawer Length - 24mm
(Steel Back)
Drawer Length - 22mm

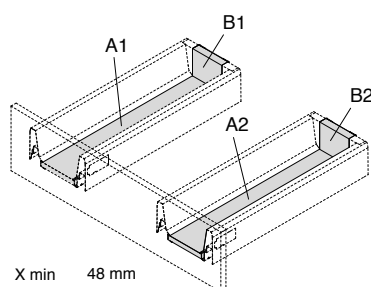





X min 48 mm
X max 127 mm

ICW	Internal cabinet width
ISW	Internal width between sink drawer sides



- Roller bearing concealed runners
- Full extension with synchro control
- Steel drawer side **83mm**
- Load capacity of **35kg** or **60kg**
- Quick assembly
- Flexible 3-dimensional front adjustment
- **Sylent** integrated cushioning system
- Integrated lateral stabiliser

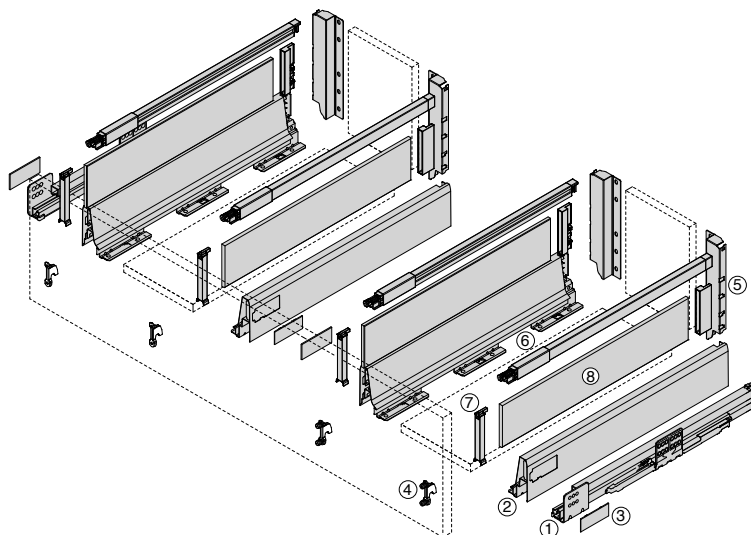


①	Cabinet Profile Left / Right : galvanised		②	Drawer Side Left / Right :		⑥	Railing Set Left / Right :	
Drawer Length	35kg		60kg		Inclusive of Screw-on and Expansion railing adaptor			
	Left/Right to be ordered separately		Left/Right to be ordered separately					
	450mm	TM13S.45.GI	TM16S.45.GI	2X	TD23.45.XX	2X	RRA3.352.XX	
	500mm	TM13S.50.GI	TM16S.50.GI	2X	TD23.50.XX	2X	RRA3.402.XX	
	550mm	TM13S.55.GI	TM16S.55.GI	2X	TD23.55.XX	2X	RRA3.452.XX	
600mm		TM16S.60.GI	2X	TD23.60.XX	2X	RRA3.502.XX		
650mm		TM16S.65.GI	2X	TD23.65.XX	2X	RRA3.552.XX		
③	Cover Cap-harn Logo		⑦	Side Extend Adaptor Left / Right :				
	4X	RBC.62230-L1.XX		2X	RSE2-HG.000.XX			
④	Front Fixing Bracket		⑧	Side Extend Panel				
	 Screw-on	4X RBF.21130.GI		Drawer Length				
	 Press-in	4X RBF.22130.GI		Aluminium				
	 Expansion	4X RBF.23130.GI		Glass				
⑤	Rear Fixing Bracket Left / Right :			450mm				
	Left/Right to be ordered separately			500mm				
	2X	RBR.75330.XX		550mm				
	Steel Back	see page 60		600mm				
				650mm				



Drawer Length

450 mm

500, 550 mm

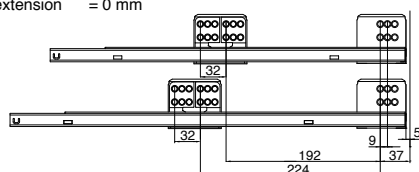


Drawer Length


450 mm

500, 550 mm


600, 650 mm

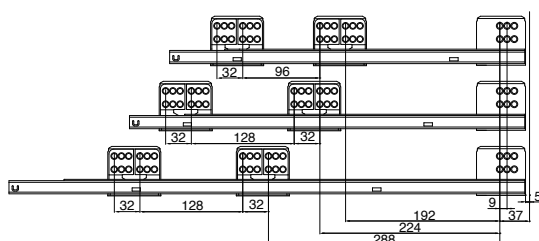


Cutting Dimension for Side Extend Panel

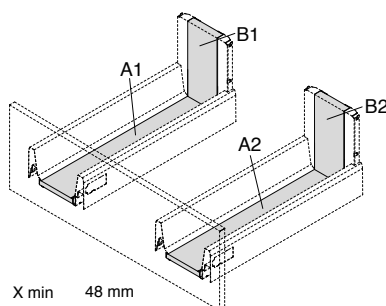

X min	48 mm
X max	127 mm
ICW	Internal cabinet width
ISW	Internal width between sink drawer sides




The edge is a polished flat ended edge with a $1\text{mm} \pm 0.5\text{mm}$ bevel.

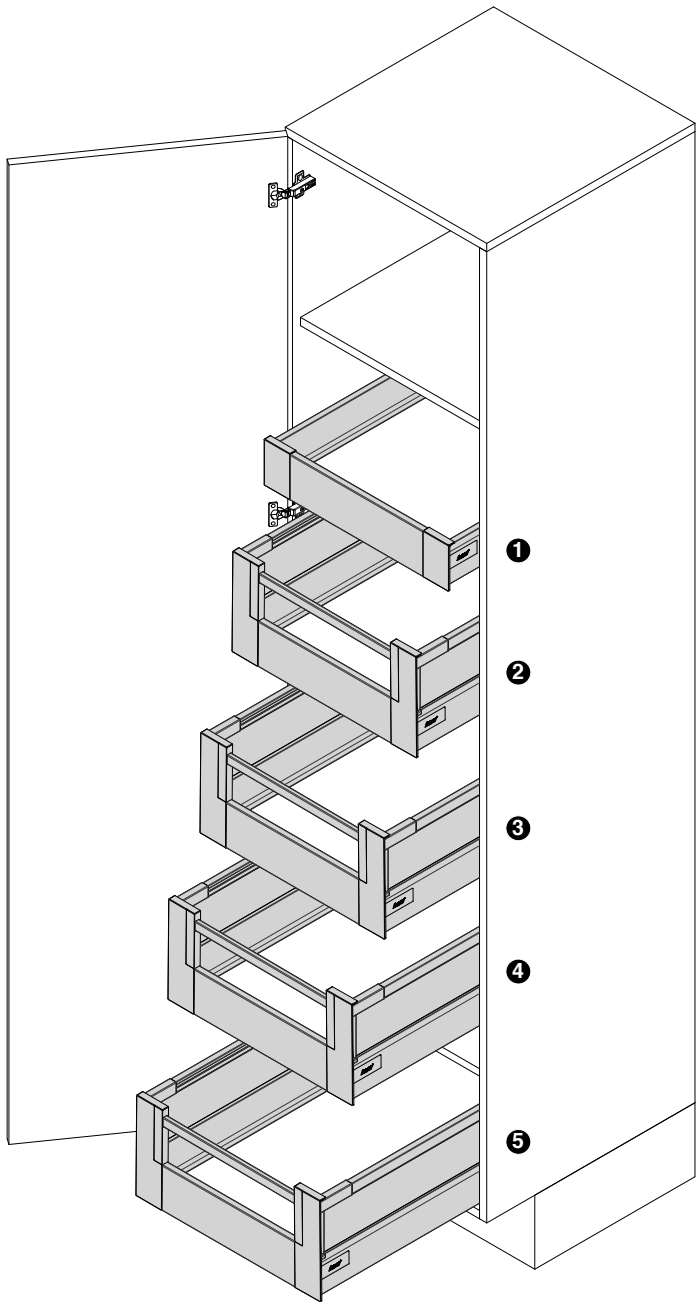


❶	Inner Drawer-S	See page 10
❷	Inner Drawer-HS Rectangular Rail with Side Panel	See page 22
❸	Inner Drawer-HS Rectangular Rail with Side Panel	See page 22
❹	Inner Drawer-HS Rectangular Rail with Side Panel	See page 22
❺	Inner Drawer-HS Rectangular Rail with Side Panel	See page 22

Drawer Locations

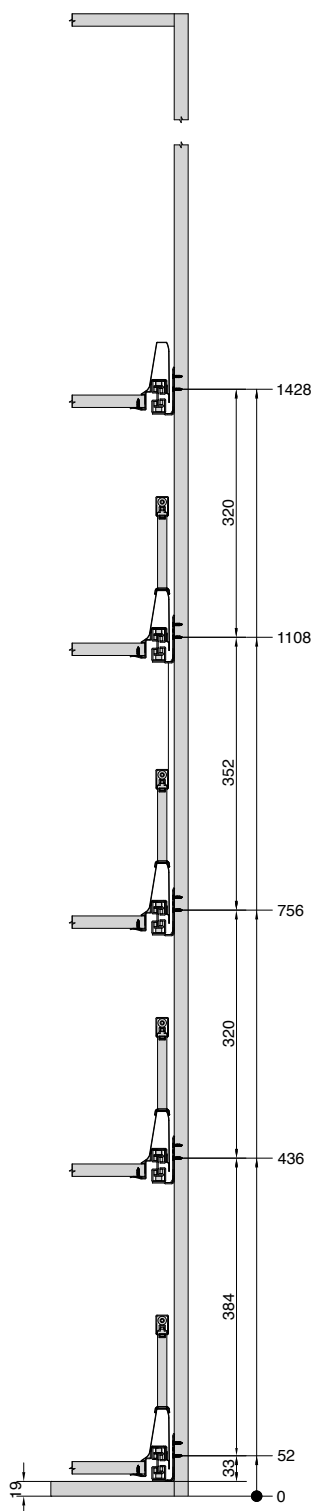


Hinge Locations

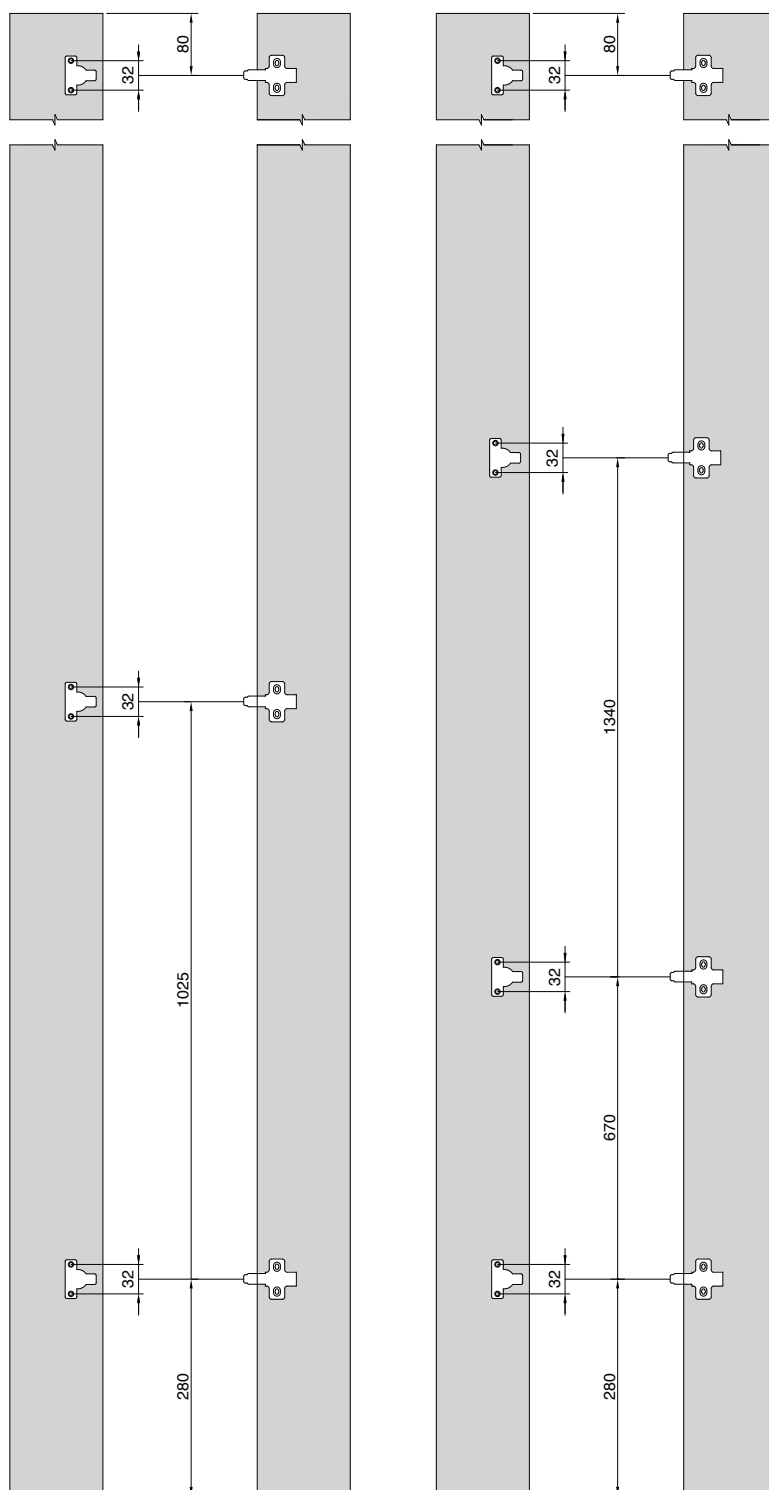

Recommended Cabinet Width 450mm – 1200mm

Important Notice:


Use hinges with zero door protrusion when opened at 90° angle and more, or Spacer 25mm. See page 61. Line boring information is based on cabinet base panel 16mm thick with 1mm bottom gap. Changes in thickness of the first drawer from bottom offsets all dimensions on the cabinet and front door.



Drawer S

Cabinet Width
(16mm side panel)


400mm	RSB2S.338.XX
450mm	RSB2S.388.XX
500mm	RSB2S.438.XX
550mm	RSB2S.488.XX
600mm	RSB2S.538.XX
900mm	RSB2S.838.XX
1000mm	RSB2S.938.XX
1200mm	RSB2S.1138.XX



Drawer HS


Cabinet Width
(16mm side panel)

400mm	RSB2HS.338.XX
450mm	RSB2HS.388.XX
500mm	RSB2HS.438.XX
550mm	RSB2HS.488.XX
600mm	RSB2HS.538.XX
900mm	RSB2HS.838.XX
1000mm	RSB2HS.938.XX
1200mm	RSB2HS.1138.XX




Chipboard Screws

Length	
15.0mm	350.150
17.0mm	350.170




Special Euro Screws

Length	
10.0mm	361.100
11.5mm	361.115
13.0mm	361.130
14.5mm	361.145




Euro Screws

Length	
10.0mm	360.100
11.5mm	360.115
13.0mm	360.130
14.5mm	360.145
20.0mm	360.200




Dowels

501.115




Standard Drawer Front Locking Piece

Included 2 pan head screws 201.000



Inner Drawer Locking Piece (RPF870)

208.000




Spacer 25mm


Lite Grey

207.000

- Used to space cabinet profiles away from the cabinet side on internal drawer.
- Use (2)pcs. per cabinet profile.

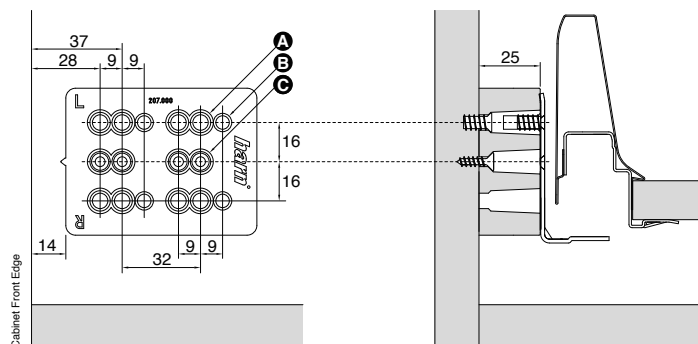


- A** Euro screw spacer attachment. Article No. 360.145
- B** Euro screw cabinet profile attachment. Article No. 360.145
- C** Chipboard screw spacer attachment. Article No. 350.170

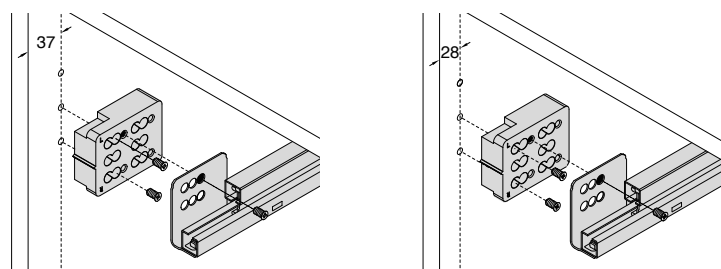

Fixing onto cabinet

A Chipboard Screws
Ø4 x 15

B Euro Screws
Article No. 360.145

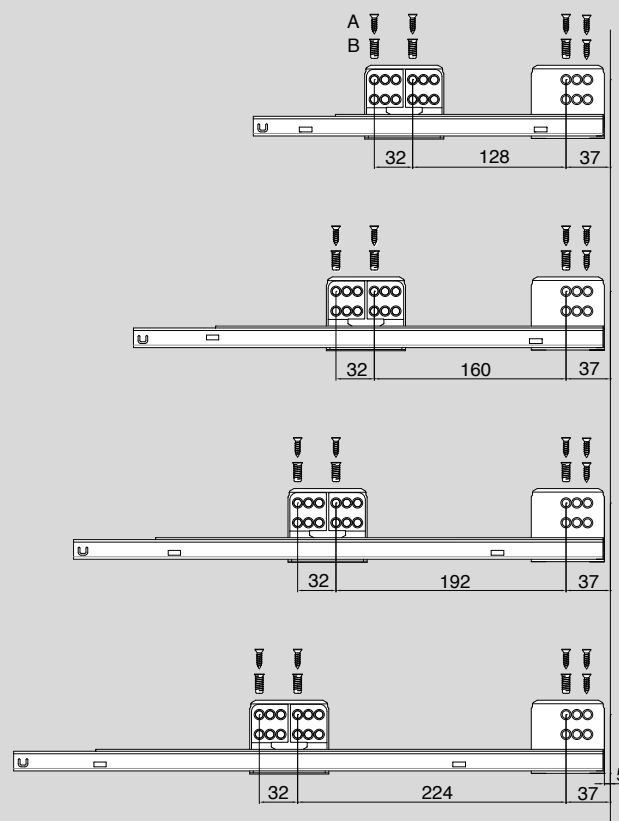


TM13S

270, 300, 350mm

400mm

450mm

500, 550mm

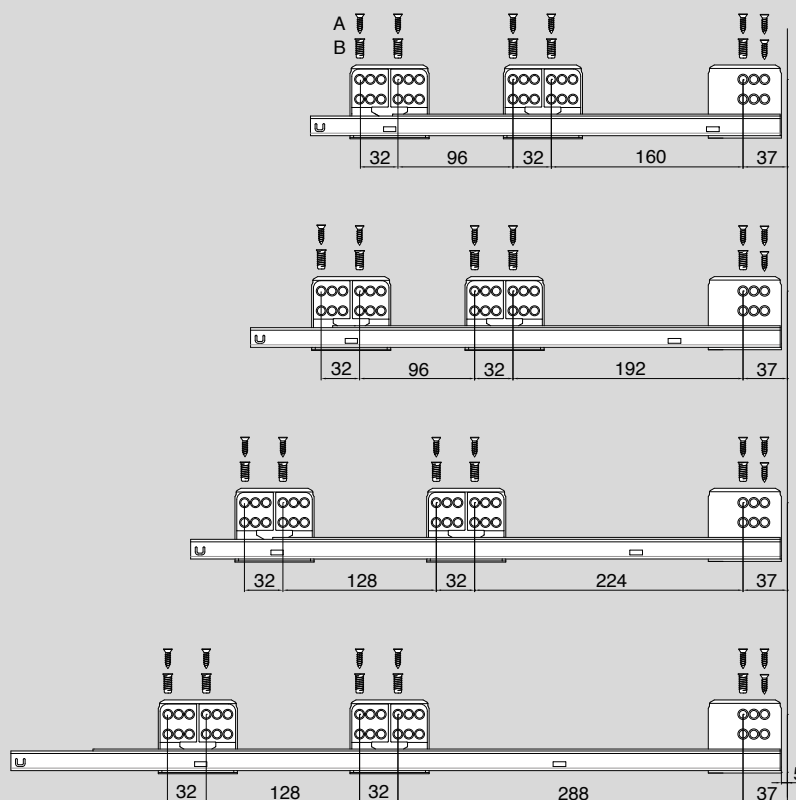

TM16S


400mm

450mm

500, 550mm


600, 650mm

Drawer S Assembly – Wooden Back

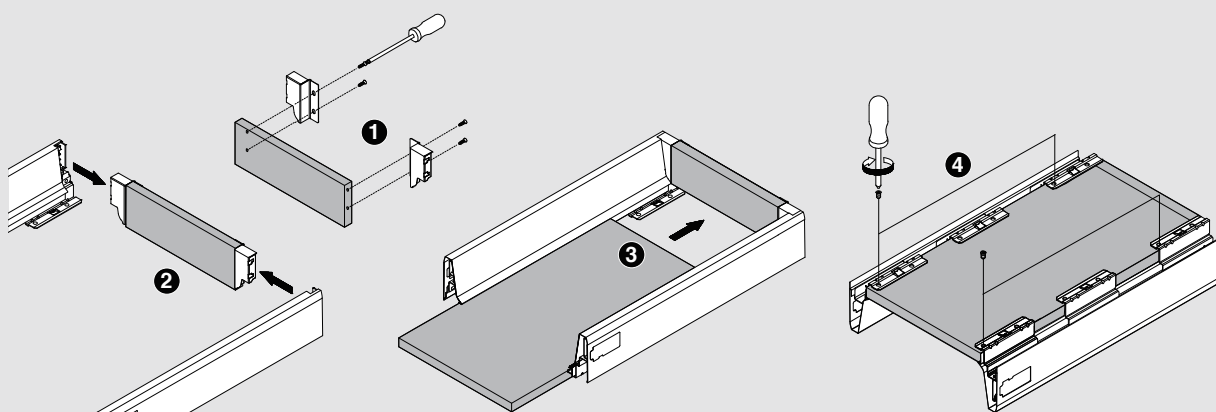


Drawer Front Assembly and Removal


Screw-on



Assembly




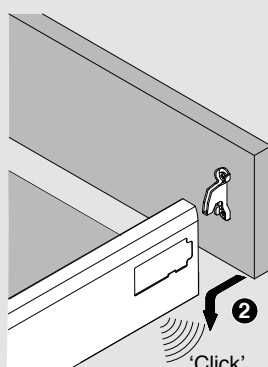


'Click'







Removal


Standard Drawer MS/KS/HS Assembly




Standard Drawer HS Side Panel Assembly




Standard Drawer HS Rectangular Double Rail Assembly

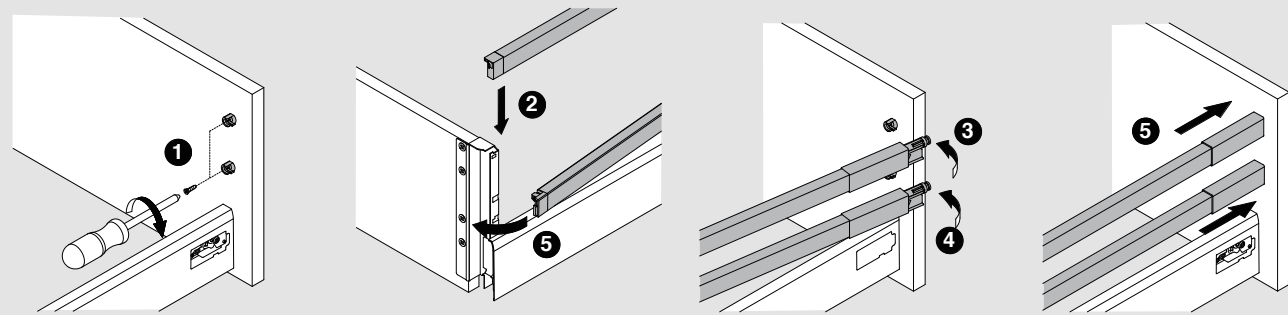


Standard Drawer HT Assembly

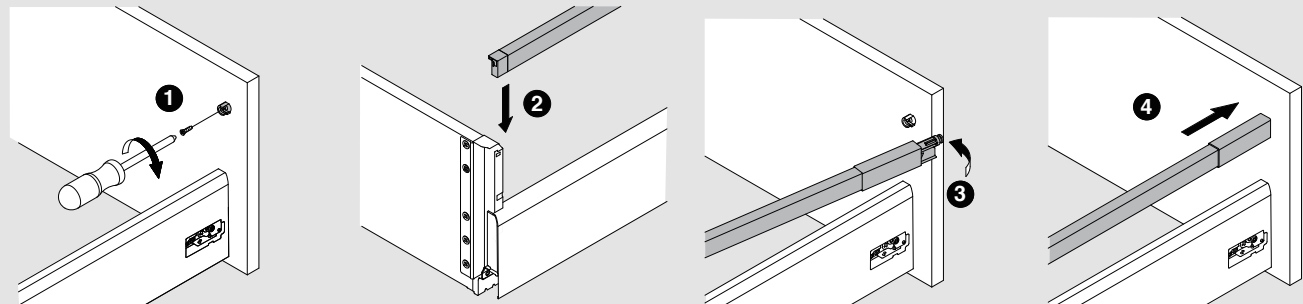


Drawer Insertion

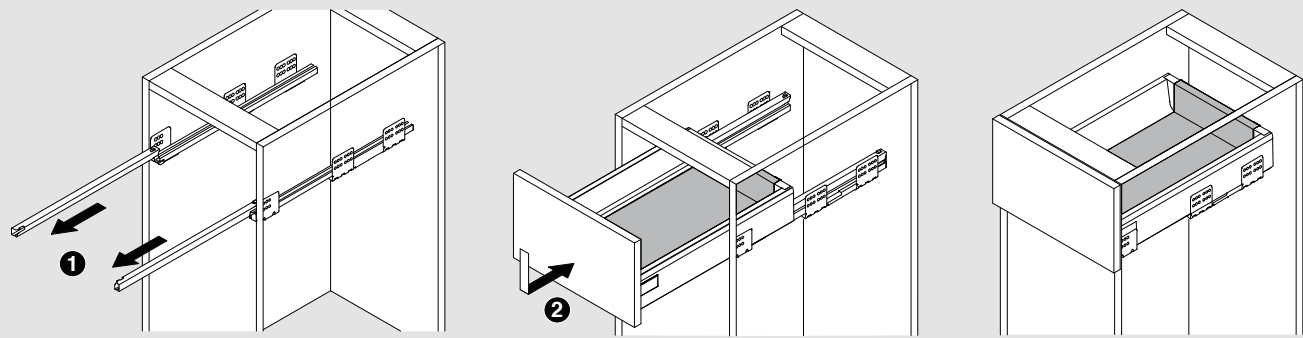


Drawer Removal

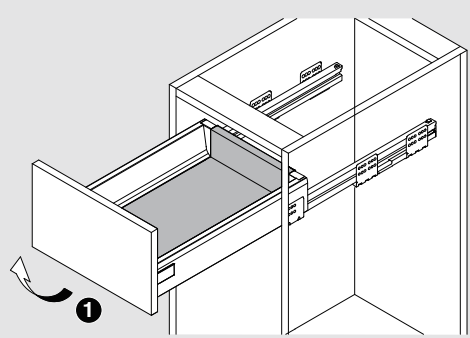

Drawer Front – Side Adjustment



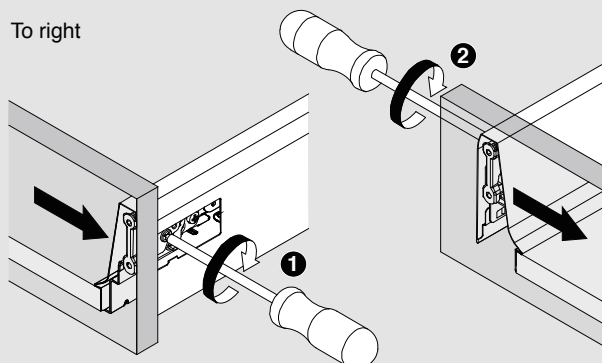


Adjustable by 1.25mm to the right

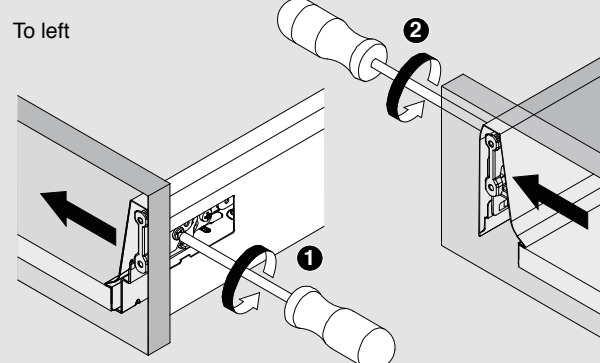


Adjustable by 1.25mm to the left

Drawer Front – Height Adjustment

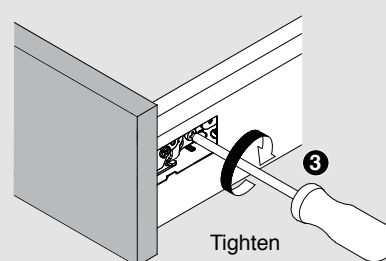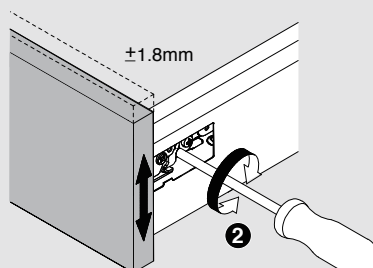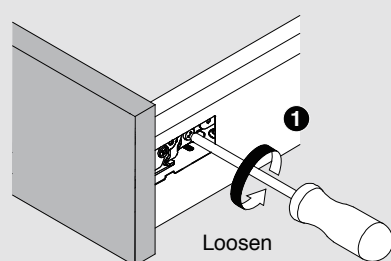


Drawer Front Tilt Adjustment


Rectangular Rail





Round Rail




Inner Drawer S/T Assembly / Removal




Assembly




Removal




Inner Drawer HS and Side Panel Assembly

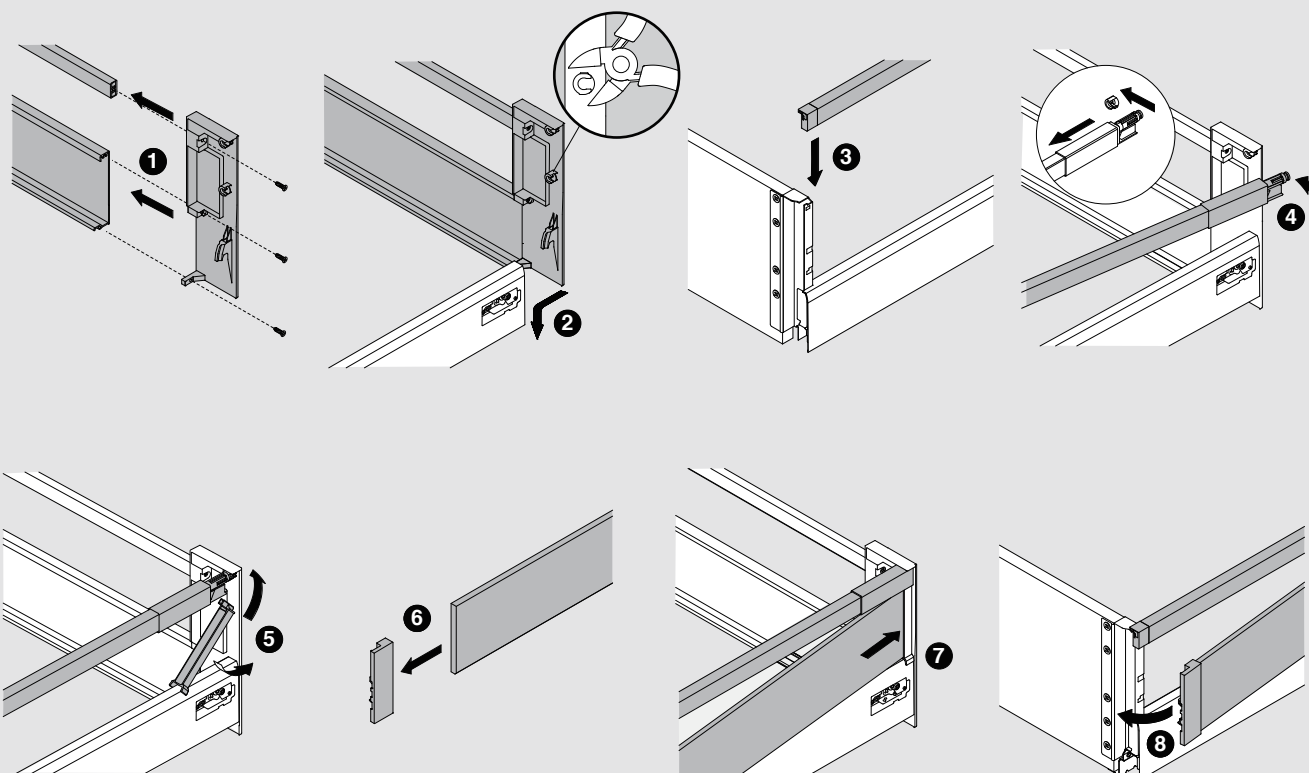

Inner Drawer HS Rectangular Double Rail Assembly




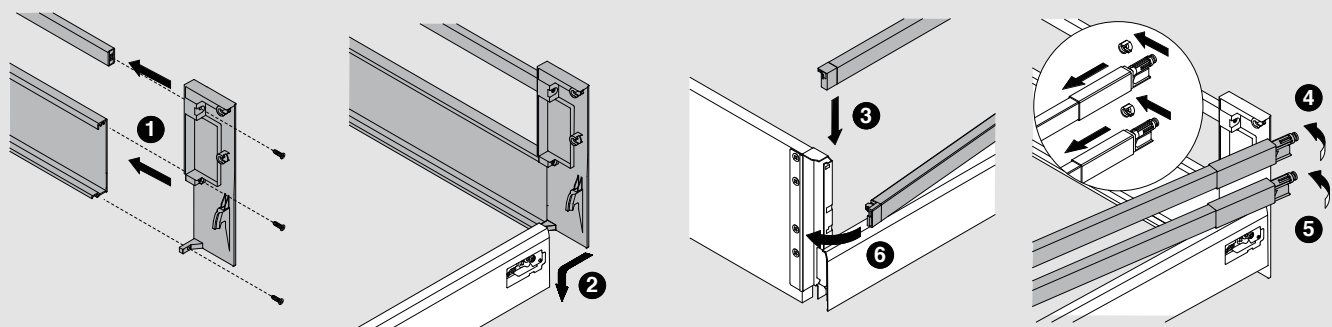


Inner Drawer HT Assembly




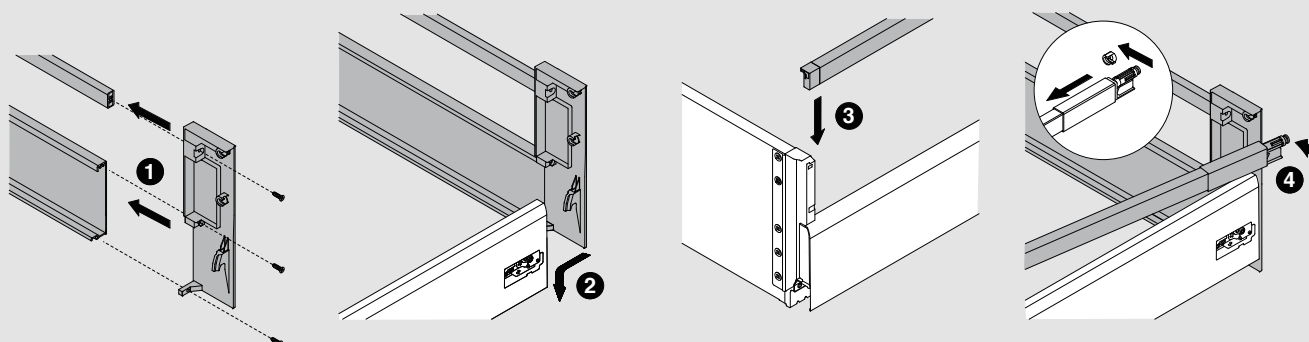


Inner Drawer Locking Piece for RPF870



Standard Drawer Locking Piece







Standard Drawer HS Assembly



Side Extend Assembly


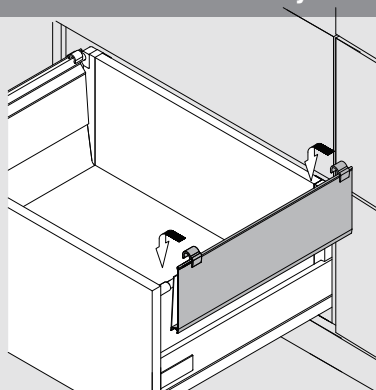


Standard Drawer HS Double Railing Assembly




Divider Panel Assembly and Adjustment (RPD2)


Lateral Divider Assembly






Assembly




Adjustment



Divider Panel Assembly (RPD)








Drawer Front Marking Jigs

Article No.

RMD.91430.25

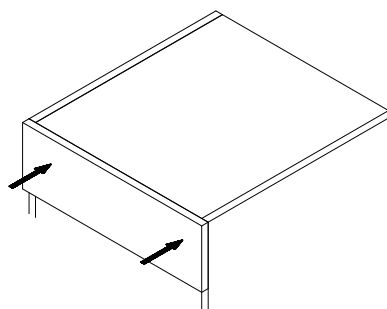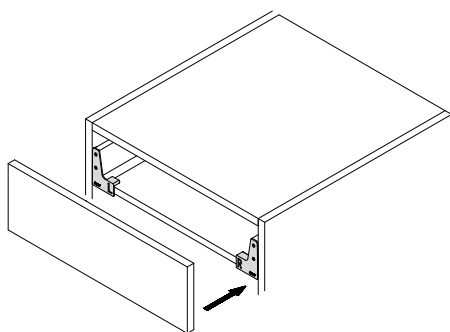




Railing Marking Template

For marking single and double railing

Article No.

RMD.92230.25

Application

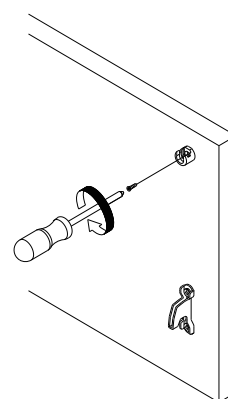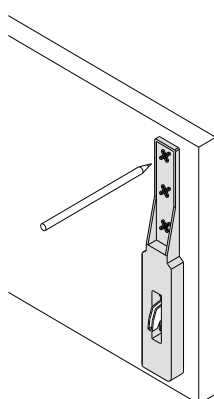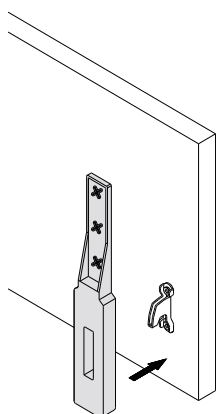




Knock In Tool

For manual installation of Ritma Press-In Front Fixing Brackets RBF.22130.GI

Article No.

RME.95231.25

Application

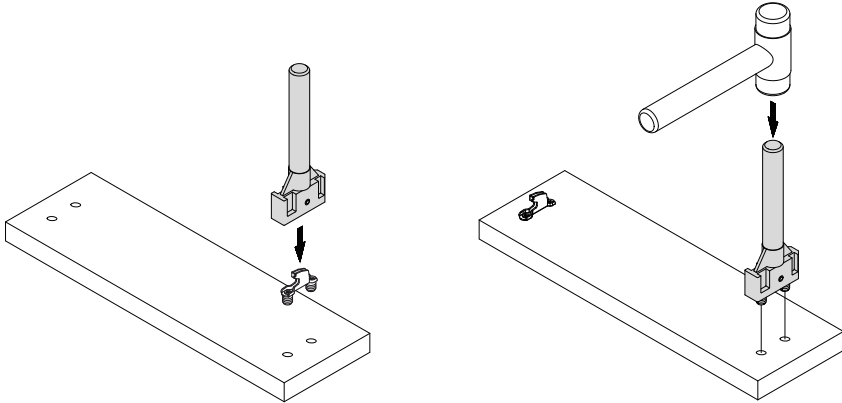

Notes

Aksesori Setia Sdn.Bhd.

Company No. 326521-U

No.3, Persiaran Rishah 14,
Kawasan Perindustrian Silibin,
30100 Ipoh, Perak, Malaysia.

Tel : (60) 5 - 527 6055

Fax : (60) 5 - 527 6063

E-mail : info@harn.com

www.harn.com

harn[®]





harn[®] *moving innovations ▶*

RITMA ALUNAN

product
assembly
installation

Drawer lengths to your requirements

270 mm - 650 mm

Drawer S


Drawer T

Drawer KS


Drawer HT

270 mm


650 mm

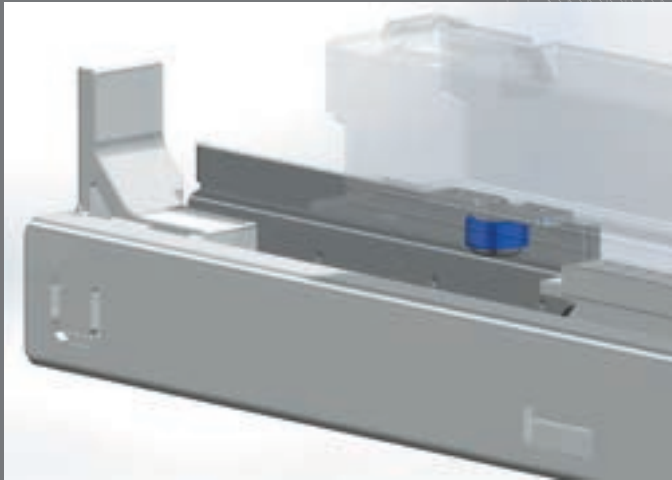

The Anti-tilt mechanism prevents the drawer from skewing during the pull out action.

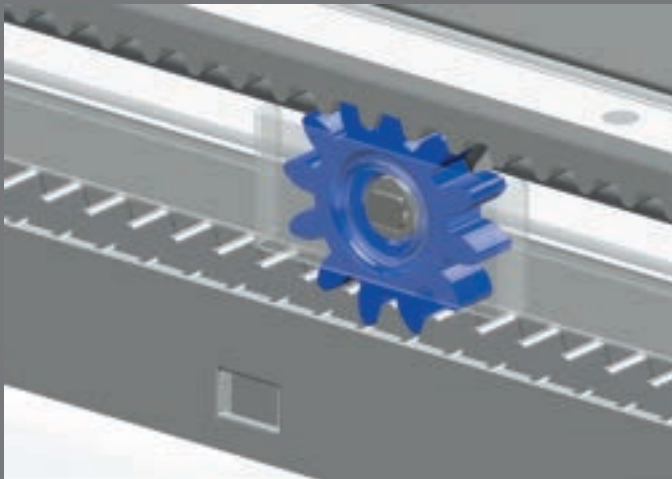

The cabinet profile's synchronise mechanism together with nests of low-friction roller bearings offer smooth and quiet sliding action.

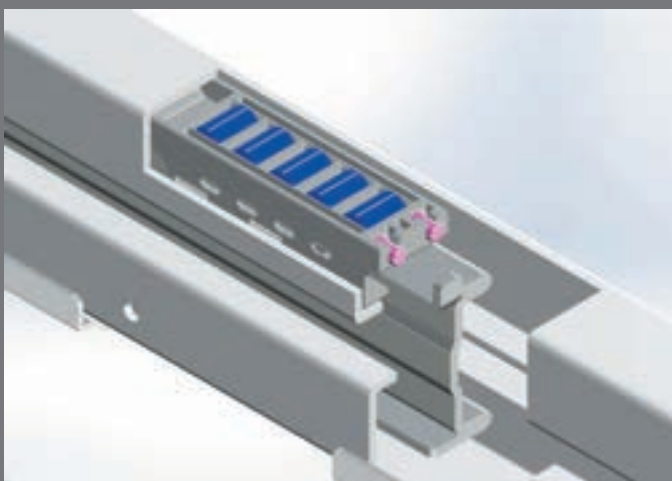

The I-Channel with nests of roller bearings offer smoother and quieter sliding performance on a full load.

Table of content

	Standard Drawer	
Drawer S Drawer Height 88mm		6
Drawer T Drawer Height 120mm		8
Drawer - KS Rectangular Rail with Side Panel Drawer Height 170mm		10
Drawer - HT Rectangular Rail with Side Panel Drawer Height 204mm		12
Divider Panel Rectangular Rail		14
Organise^{plus}		16
Cabinet Profile Fixing Position		18
Assembly, Removal and Adjustment		19




RITMA ALUNAN



Standard Drawer - S

RITMA ALUNAN





- Roller bearing concealed runners
- Full extension with synchro control
- Steel drawer side **88mm**
- Load capacity of **35kg** or **60kg**
- Quick assembly
- Flexible 2-dimensional front adjustment
- **Sylent** integrated cushioning system
- Integrated lateral stabiliser

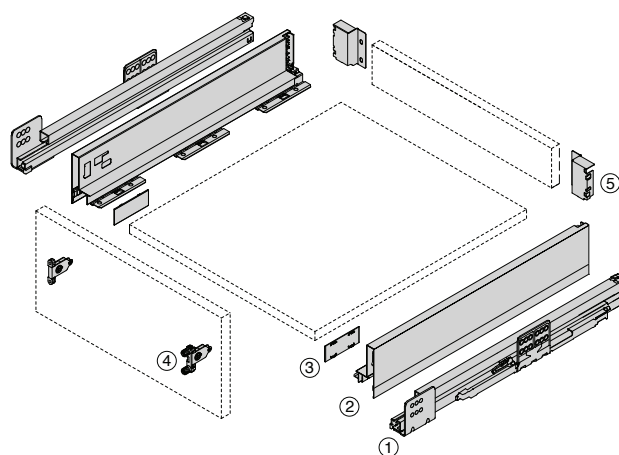

① 	Cabinet Profile Left / Right : galvanised		② 	Drawer Side Left / Right :
Drawer Length	35kg	60kg		
	Left/Right to be ordered separately		Left/Right to be ordered separately	
	270mm	TM13S.27.GI		TD83.27.XX
	300mm	TM13S.30.GI		TD83.30.XX
	350mm	TM13S.35.GI		TD83.35.XX
	400mm	TM13S.40.GI	TM16S.40.GI	TD83.40.XX
	450mm	TM13S.45.GI	TM16S.45.GI	TD83.45.XX
	500mm	TM13S.50.GI	TM16S.50.GI	TD83.50.XX
	550mm	TM13S.55.GI	TM16S.55.GI	TD83.55.XX
	600mm		TM16S.60.GI	TD83.60.XX
650mm		TM16S.65.GI	TD83.65.XX	
③ 	Cover Cap			
	2X	RBC.62230.XX		
④ 	Front Fixing Bracket			
	 Screw- on	2X	RBF.21230.GI	
	 Press-in	2X	RBF.22230.GI	
	 Expansion	2X	RBF.23230.GI	
⑤ 	Rear Fixing Bracket Left / Right :			
	Left/Right to be ordered separately			
		RBR.82330.XX		
	Steel Back	n/a		

Space Requirements and Front Installation Dimensions

Back Installation Dimensions

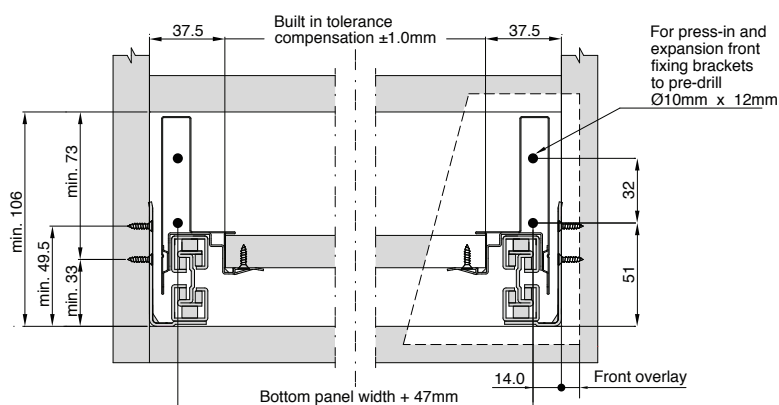

Cabinet Profile Screw Positions

TM13S

Drawer Length


Min. internal cabinet depth = drawer length + 3 mm
Actual loss of extension = 0 mm

270, 300, 350 mm

400 mm

450 mm

500, 550 mm

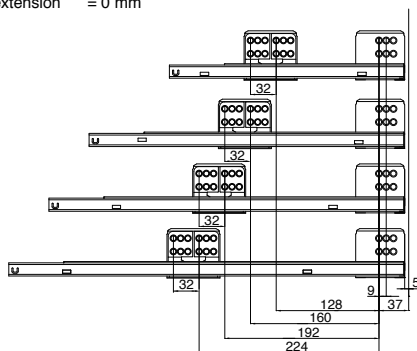

TM16S

Drawer Length


Min. internal cabinet depth = drawer length + 3 mm
Actual loss of extension = 0 mm

400 mm

450 mm

500, 550 mm

600, 650 mm

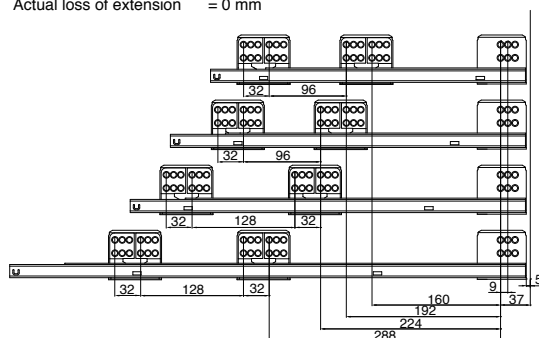


Cutting Dimensions for 16mm Chipboard

Back panel

Width = internal cabinet width - 87mm
Height = 74mm

Bottom panel

Width = internal cabinet width - 75mm
Length (Wooden Back) = drawer length - 24mm
Length (Steel Back) = drawer length - 22mm




RITMA ALUNAN



Standard Drawer - T

RITMA ALUNAN





- Roller bearing concealed runners
- Full extension with synchro control
- Steel drawer side **120mm**
- Load capacity of **35kg** or **60kg**
- Quick assembly
- Flexible 2-dimensional front adjustment
- **Sylent** integrated cushioning system
- Integrated lateral stabiliser

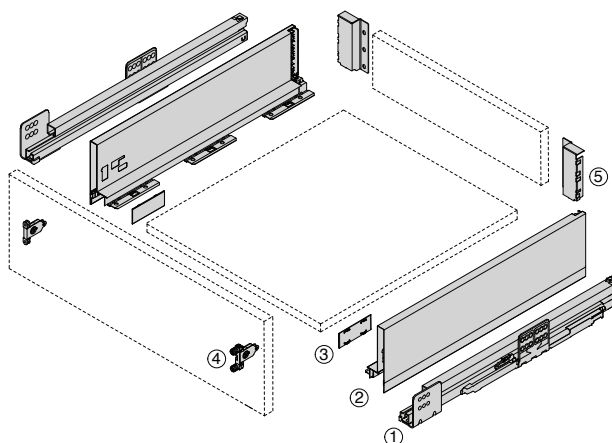

①			②		Drawer Side Left / Right :	
Drawer Length	35kg	60kg				
	Left/Right to be ordered separately		Left/Right to be ordered separately			
	270mm	TM13S.27.GI		TD85.27.XX		
	300mm	TM13S.30.GI		TD85.30.XX		
	350mm	TM13S.35.GI		TD85.35.XX		
	400mm	TM13S.40.GI	TM16S.40.GI	TD85.40.XX		
	450mm	TM13S.45.GI	TM16S.45.GI	TD85.45.XX		
	500mm	TM13S.50.GI	TM16S.50.GI	TD85.50.XX		
	550mm	TM13S.55.GI	TM16S.55.GI	TD85.55.XX		
	600mm		TM16S.60.GI	TD85.60.XX		
	650mm		TM16S.65.GI	TD85.65.XX		
	③			Cover Cap		
		2X	RBC.62230.XX			
④			Front Fixing Bracket			
	 Screw- on	2X	RBF.21230.GI			
	 Press-in	2X	RBF.22230.GI			
	 Expansion	2X	RBF.23230.GI			
⑤			Rear Fixing Bracket Left / Right :			
	Left/Right to be ordered separately					
		RBR.82530.XX				
	Steel Back	n/a				

Space Requirements and Front Installation Dimensions

Back Installation Dimensions

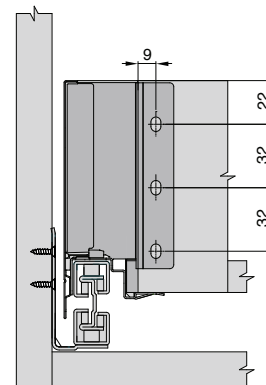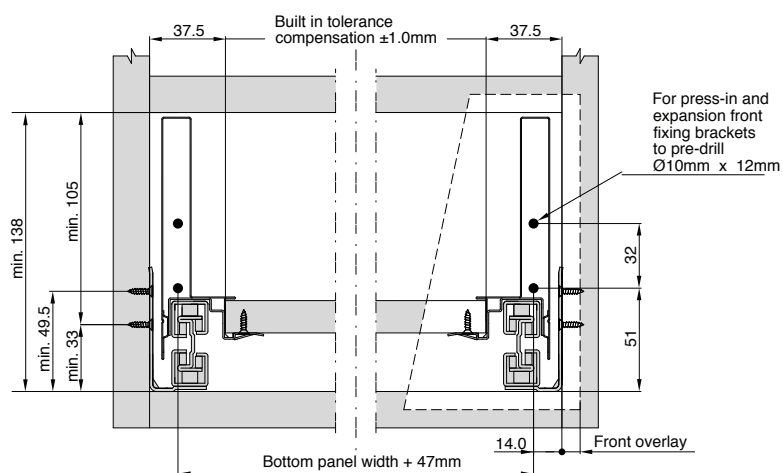

Cabinet Profile Screw Positions

TM13S

Drawer Length


Min. internal cabinet depth = drawer length + 3 mm
Actual loss of extension = 0 mm

270, 300, 350 mm

400 mm

450 mm

500, 550 mm

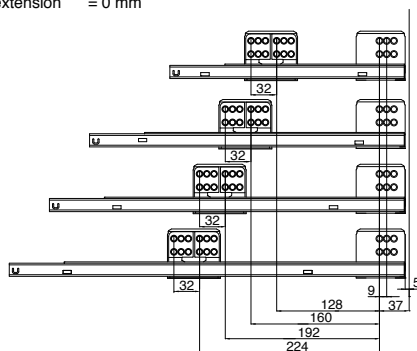

TM16S

Drawer Length


Min. internal cabinet depth = drawer length + 3 mm
Actual loss of extension = 0 mm

400 mm

450 mm

500, 550 mm


600, 650 mm

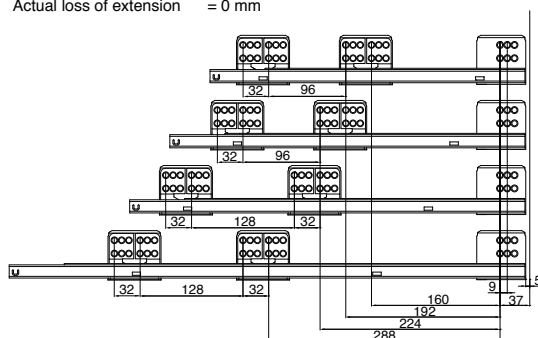

Cutting Dimensions for 16mm Chipboard

Back panel

Width = internal cabinet width - 87mm
Height = 106mm

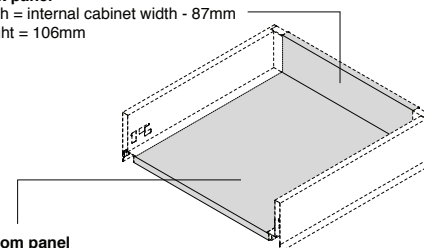









Bottom panel

Width = internal cabinet width - 75mm
Length (Wooden Back) = drawer length - 24mm
Length (Steel Back) = drawer length - 22mm




- Roller bearing concealed runners
- Full extension with synchro control
- Steel drawer side **170mm**
- Load capacity of **35kg** or **60kg**
- Quick assembly
- Flexible 3-dimensional front adjustment
- **Sylent** integrated cushioning system
- Integrated lateral stabiliser

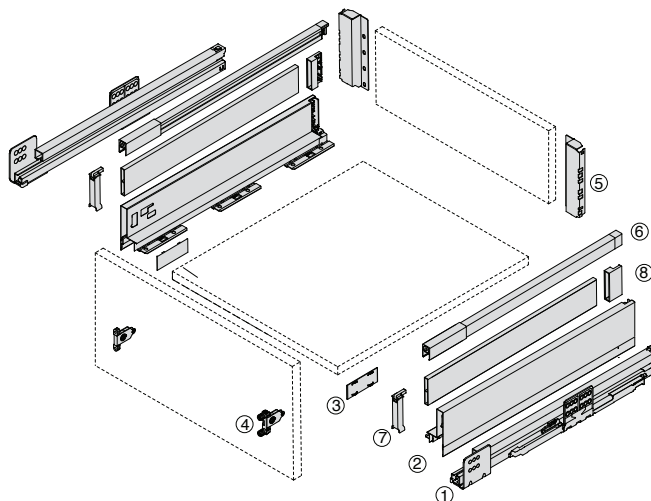


	Cabinet Profile Left / Right : galvanised			Drawer Side Left / Right :		Railing Set Left / Right :
Drawer Length	35kg	60kg			Inclusive of Screw-on and Expansion railing adaptor	
	Left/Right to be ordered separately		Left/Right to be ordered separately			
	270mm	TM13S.27.GI		TD83.27.XX	RRA3.172.XX	
	300mm	TM13S.30.GI		TD83.30.XX	RRA3.202.XX	
	350mm	TM13S.35.GI		TD83.35.XX	RRA3.252.XX	
	400mm	TM13S.40.GI	TM16S.40.GI	TD83.40.XX	RRA3.302.XX	
	450mm	TM13S.45.GI	TM16S.45.GI	TD83.45.XX	RRA3.352.XX	
	500mm	TM13S.50.GI	TM16S.50.GI	TD83.50.XX	RRA3.402.XX	
	550mm	TM13S.55.GI	TM16S.55.GI	TD83.55.XX	RRA3.452.XX	
	600mm		TM16S.60.GI	TD83.60.XX	RRA3.502.XX	
650mm		TM16S.65.GI	TD83.65.XX	RRA3.552.XX		
	Cover Cap			Side Extend Adaptor Left / Right :		
	2X	RBC.62230.XX		RSE2-MG.000.XX		
	Front Fixing Bracket			Side Extend Panel		
	 Screw-on	2X RBF.21230.GI		Drawer Length	Aluminium	
	 Press-in	2X RBF.22230.GI		270mm	2X RSP-MA.237.XX	
	 Expansion	2X RBF.23230.GI		300mm	2X RSP-MA.267.XX	
				350mm	2X RSP-MA.317.XX	
				400mm	2X RSP-MA.367.XX	
				450mm	2X RSP-MA.417.XX	
				500mm	2X RSP-MA.467.XX	
				550mm	2X RSP-MA.517.XX	
				600mm	2X RSP-MA.567.XX	
				650mm	2X RSP-MA.617.XX	
	Rear Fixing Bracket Left / Right :					
	Left/Right to be ordered separately					
		RBR.84330.XX				
	Steel Back	n/a				

Space Requirements and Front Installation Dimensions

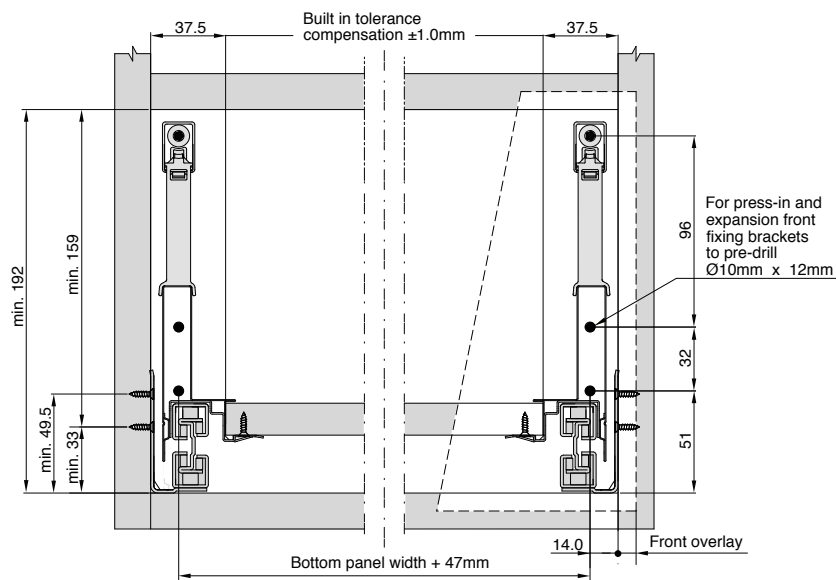

Back Installation Dimensions

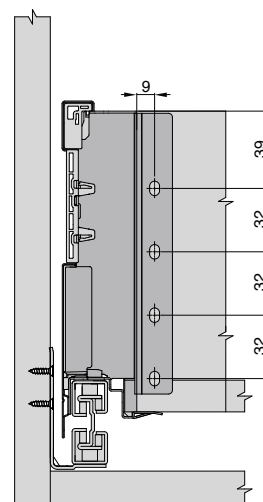

Cabinet Profile Screw Positions

TM13S

Drawer Length


Min. internal cabinet depth = drawer length + 3 mm
Actual loss of extension = 0 mm

270, 300, 350 mm

400 mm

450 mm

500, 550 mm

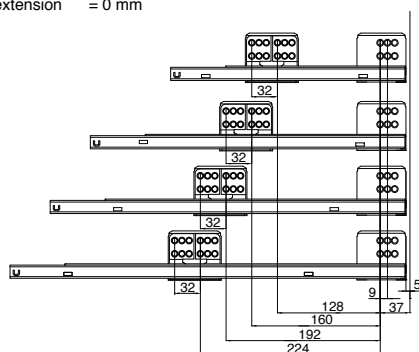

TM16S

Drawer Length


Min. internal cabinet depth = drawer length + 3 mm
Actual loss of extension = 0 mm

400 mm

450 mm

500, 550 mm


600, 650 mm

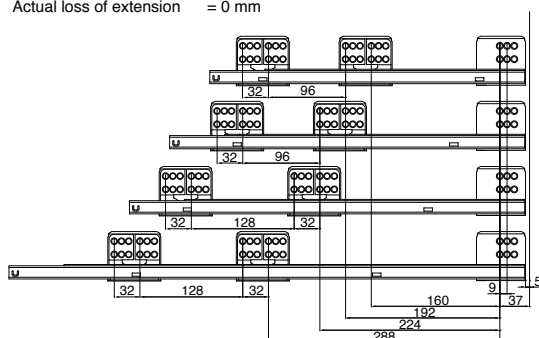

Cutting Dimensions for 16mm Chipboard

Back panel


Width = internal cabinet width - 87mm
Height = 151mm

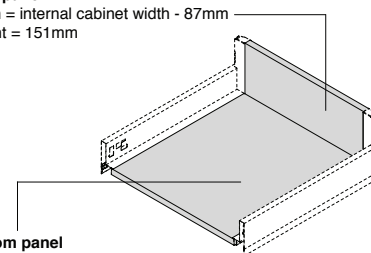

Bottom panel

Width = internal cabinet width - 75mm
Length (Wooden Back) = drawer length - 24mm
Length (Steel Back) = drawer length - 22mm

Cutting Dimension for Side Extend Panel








For norm compliance
no safety glass is required.

The edge is a polished flat ended
edge with a 1mm ± 0.5mm bevel.




- Roller bearing concealed runners
- Full extension with synchro control
- Steel drawer side **202mm**
- Load capacity of **35kg** or **60kg**
- Quick assembly
- Flexible 3-dimensional front adjustment
- **Sylent** integrated cushioning system
- Integrated lateral stabiliser

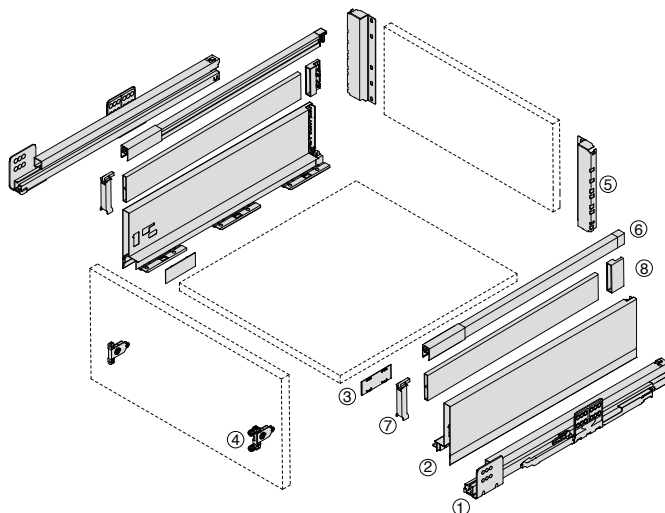


	Cabinet Profile Left / Right : galvanised			Drawer Side Left / Right :		Railing Set Left / Right :
Drawer Length	35kg	60kg			Inclusive of Screw-on and Expansion railing adaptor	
	Left/Right to be ordered separately		Left/Right to be ordered separately			
270mm	TM13S.27.GI		TD85.27.XX		RRA3.172.XX	
300mm	TM13S.30.GI		TD85.30.XX		RRA3.202.XX	
350mm	TM13S.35.GI		TD85.35.XX		RRA3.252.XX	
400mm	TM13S.40.GI	TM16S.40.GI	TD85.40.XX		RRA3.302.XX	
450mm	TM13S.45.GI	TM16S.45.GI	TD85.45.XX		RRA3.352.XX	
500mm	TM13S.50.GI	TM16S.50.GI	TD85.50.XX		RRA3.402.XX	
550mm	TM13S.55.GI	TM16S.55.GI	TD85.55.XX		RRA3.452.XX	
600mm		TM16S.60.GI	TD85.60.XX		RRA3.502.XX	
650mm		TM16S.65.GI	TD85.65.XX		RRA3.552.XX	
	Cover Cap			Side Extend Adaptor Left / Right :		
	2X	RBC.62230.XX		RSE2-MG.000.XX		
	Front Fixing Bracket			Side Extend Panel		
	 Screw- on	2X RBF.21230.GI		Drawer Length		Aluminium
 Press-in	2X RBF.22230.GI	270mm		2X	RSP-MA.237.XX	
 Expansion	2X RBF.23230.GI	300mm		2X	RSP-MA.267.XX	
		350mm		2X	RSP-MA.317.XX	
		400mm		2X	RSP-MA.367.XX	
		450mm		2X	RSP-MA.417.XX	
		500mm		2X	RSP-MA.467.XX	
		550mm		2X	RSP-MA.517.XX	
		600mm		2X	RSP-MA.567.XX	
		650mm		2X	RSP-MA.617.XX	
	Rear Fixing Bracket Left / Right :					
	Left/Right to be ordered separately					
		RBR.85330.XX				
	Steel Back	n/a				

Space Requirements and Front Installation Dimensions

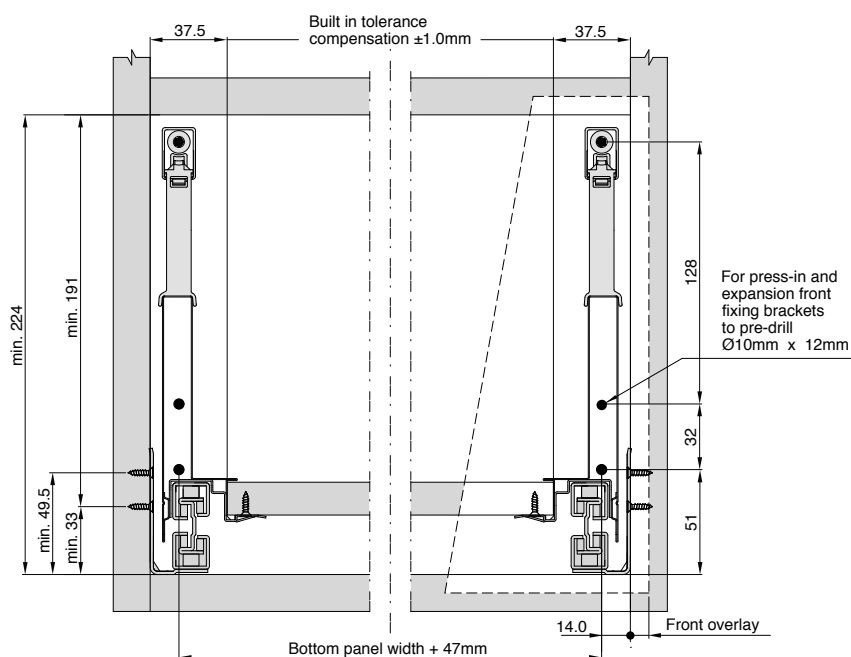

Back Installation Dimensions

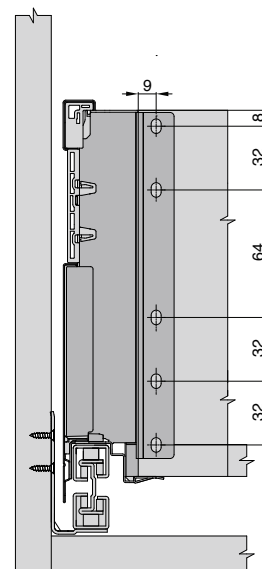

Cabinet Profile Screw Positions

TM13S

Drawer Length


Min. internal cabinet depth = drawer length + 3 mm
Actual loss of extension = 0 mm

270, 300, 350 mm

400 mm

450 mm

500, 550 mm

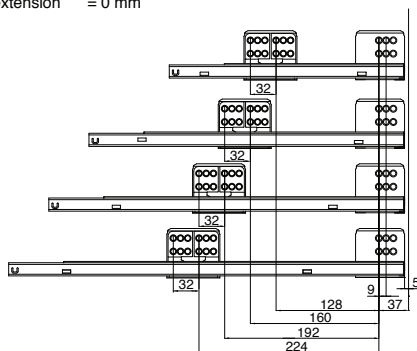

TM16S

Drawer Length


Min. internal cabinet depth = drawer length + 3 mm
Actual loss of extension = 0 mm

400 mm

450 mm

500, 550 mm

600, 650 mm

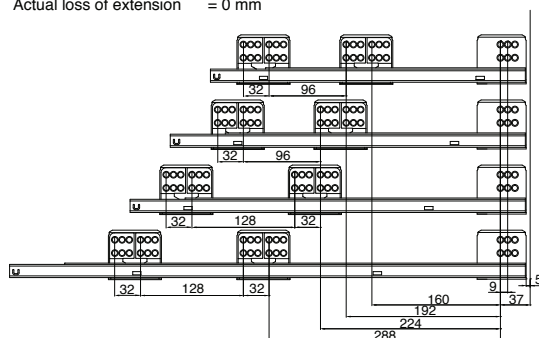

Cutting Dimensions for 16mm Chipboard


Back panel

Width = internal cabinet width - 87mm
Height = 183mm

Bottom panel

Width = internal cabinet width - 75mm
Length (Wooden Back) = drawer length - 24mm
Length (Steel Back) = drawer length - 22mm

Cutting Dimension for Side Extend Panel




For norm compliance
no safety glass is required.

The edge is a polished flat ended
edge with a 1mm ± 0.5mm bevel.

RITMA ALUNAN


Divider Panel Rectangular Rail

RITMA ALUNAN

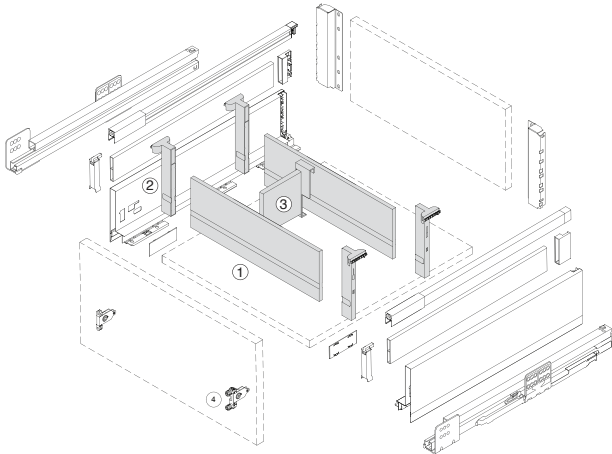


①		Divider Panel	②		Divider Panel Connector Left / Right :	③		Lateral Divider
	Cabinet Width (16mm side panel)	Cut to required width			RPC.6200.XX			RLD.6700.XX
	1200mm	RPD2.1092.XX						

Cutting Dimensions for Divider Panel



Width = Internal cabinet width - 75mm

Divider Panel					
	Drawer Length	Cabinet width			
			Divider Panel	Divider Panel Connector	Lateral Divider
 Provisions	450	300-400	x 1	x 1	
	450	450-600	x 1	x 1	x 2
	450	800-1200	x 1	x 1	x 3
	500,550	300-400	x 2	x 2	
	500,550	450-600	x 2	x 2	x 3
	500,550	800-1200	x 2	x 2	x 6
 Crockery	450,500,550	400-550	x 1	x 1	
	450,500,550	600-800	x 1	x 1	x 2
	450,500,550	900-1000	x 1	x 1	x 4
 Plastic Containers	450,500,550	300-400	x 1	x 1	
	450,500,550	450-600	x 1	x 1	x 2
	450,500,550	800-1200	x 1	x 1	x 3
 Cleaning	450,500,550	900-1200	x 2	x 2	
	450,500,550	900-1200	x 2	x 2	x 5

Divider Panel					
	Drawer Length	Cabinet width			
			Divider Panel	Divider Panel Connector	Lateral Divider
 Open Provisions	450	300-400	x 1	x 1	
	450	450-600	x 1	x 1	x 2
	450	800-1200	x 1	x 1	x 3
	500,550	300-400	x 2	x 2	
	500,550	450-600	x 2	x 2	x 3
	500,550	800-1200	x 2	x 2	x 6
 Bottles	450	275-300	x 3	x 3	x 2
	500,550	275-300	x 4	x 4	x 4
 Cooking Utensils	450	600	x 1	x 1	x 2
	450	800-1200	x 1	x 1	x 3
	500,550	600	x 2	x 2	x 3
	500,550	800-1200	x 2	x 2	x 6
 Baking / Ingredients	450	300-400	x 1	x 1	
	450	450-600	x 1	x 1	x 2
	450	800-1200	x 1	x 1	x 3
	500,550	300-400	x 2	x 2	
	500,550	450-600	x 2	x 2	x 3
	500,550	800-1200	x 2	x 2	x 6
					


Fixing onto cabinet

A Chipboard Screws
Ø4 x 15


B Euro Screws
Article No. 360.145

TM13S


270, 300, 350mm

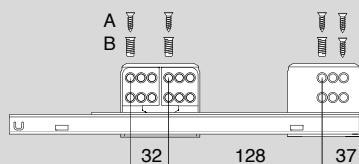


400mm

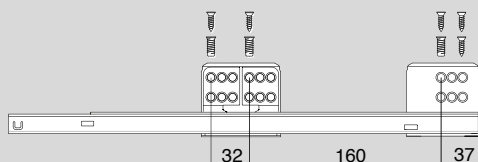

450mm

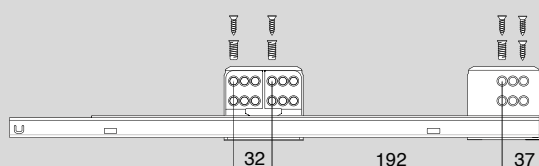


500, 550mm

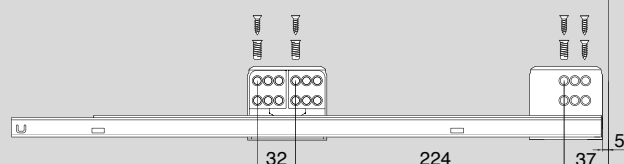


TM16S


400mm

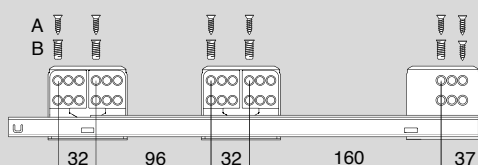


450mm

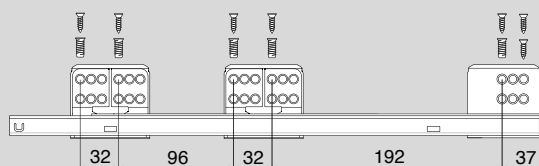


500, 550mm

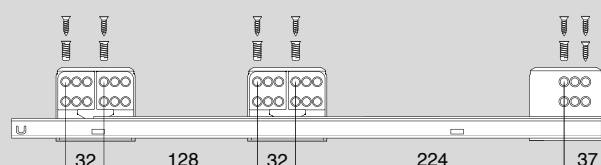

600, 650mm

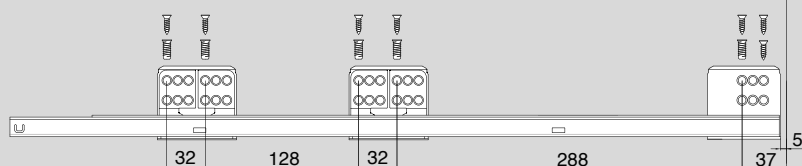


Drawer S/T Assembly – Wooden Back

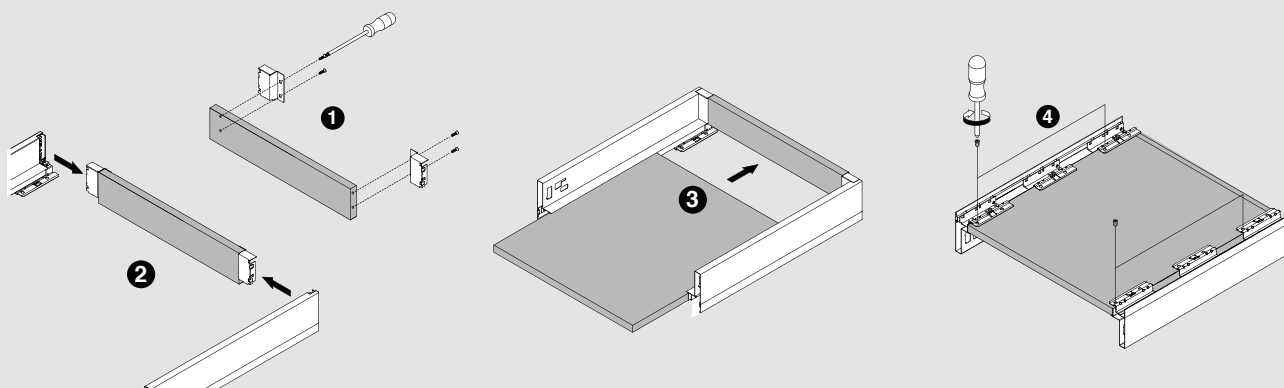


Drawer Front Assembly and Removal

Screw-on



Expansion



Assembly




Assembly




Removal


Standard Drawer KS/HT Assembly

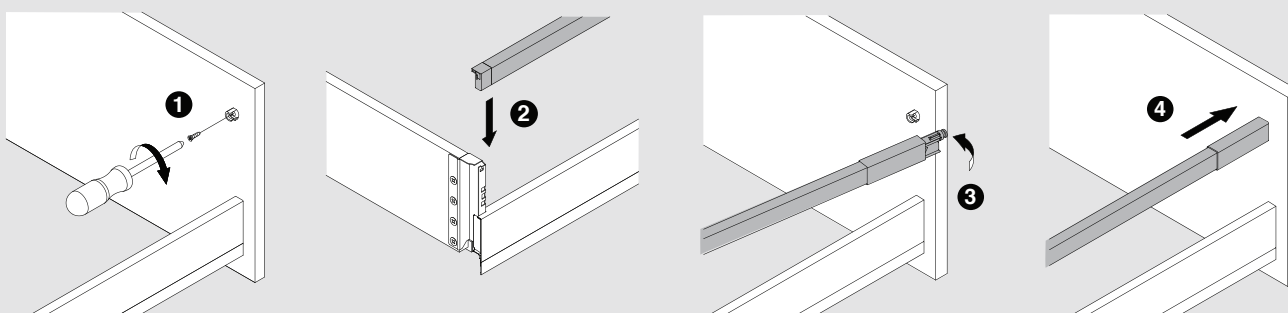


Standard Drawer KS/HT Side Panel Assembly

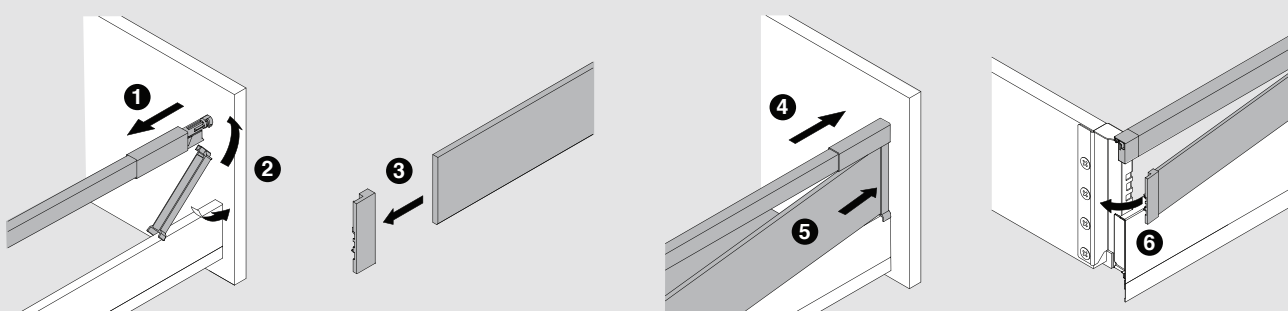

Drawer Insertion

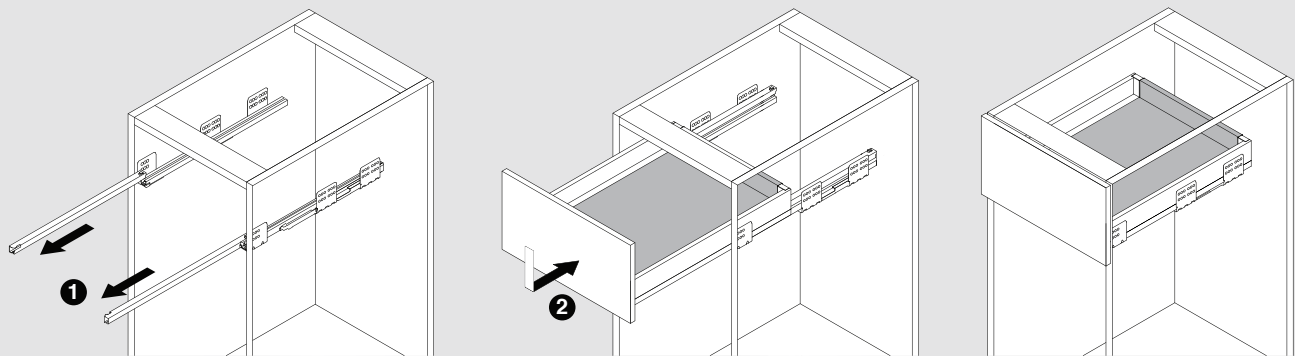

Drawer Removal

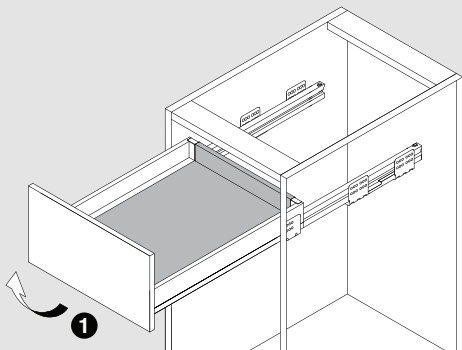


RITMA ALUNAN


Assembly, Removal and Adjustment

Drawer Front – Side Adjustment


To Left




Adjustable to the Left




To Right



Adjustable to the Right




Drawer Front – Height Adjustment




Drawer Front Tilt Adjustment

Rectangular Rail





Divider Panel Assembly and Adjustment (RPD2)


Lateral Divider Assembly



Assembly



Adjustment



[illegible]

Notes

Aksesori Setia Sdn.Bhd.

Company No. 326521-U

No.3, Persiaran Rishah 14,
Kawasan Perindustrian Silibin,
30100 Ipoh, Perak, Malaysia.

Tel : (60) 5 - 527 6055

Fax : (60) 5 - 527 6063

E-mail : info@harn.com

www.harn.com

harn[®]





harn[®] *moving innovations ▶*

triowood drawer system

product
assembly
installation

TRIOWOOD


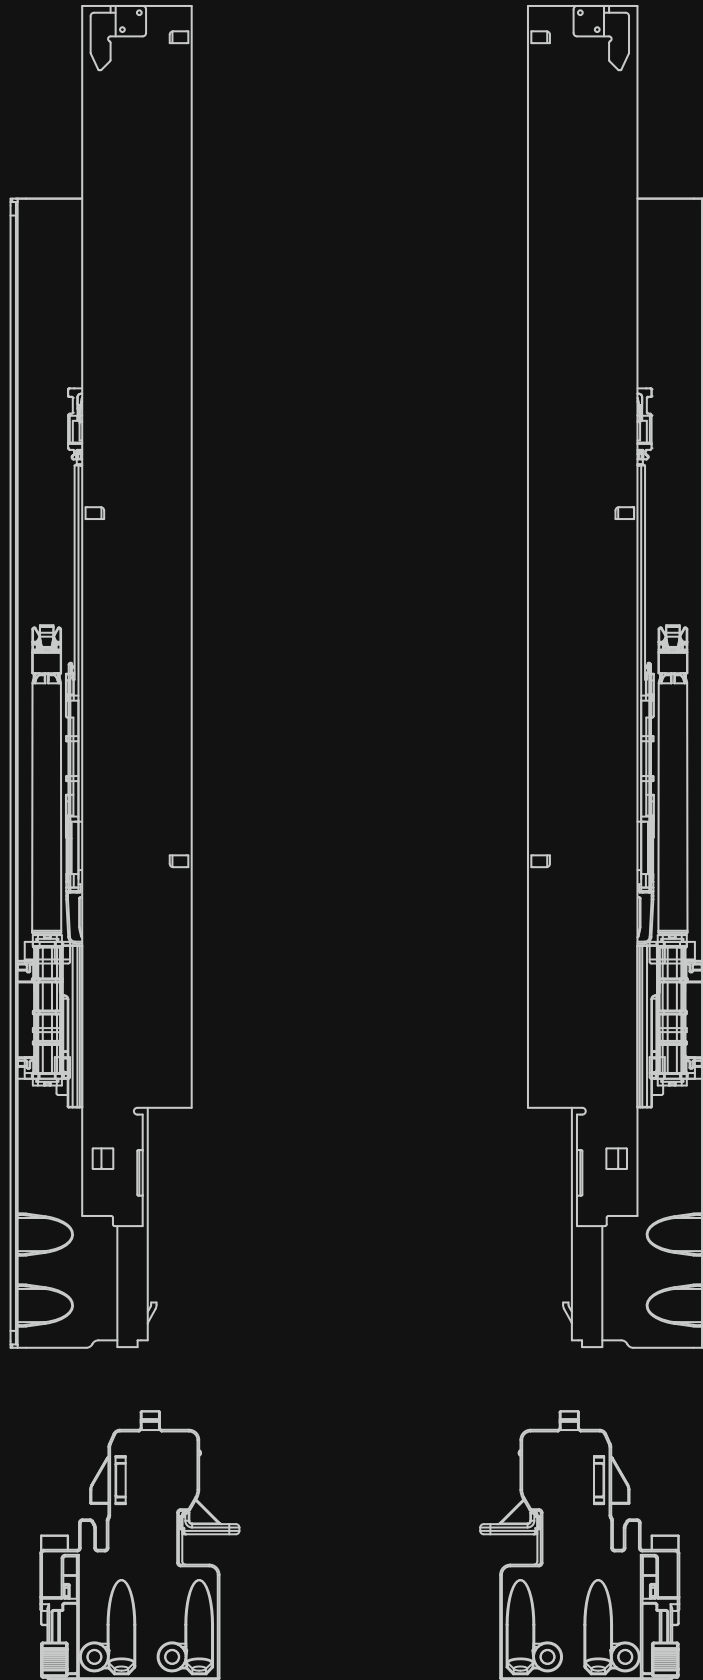


Table of content


Drawer S

Standard Drawer
Standard Inner Drawer

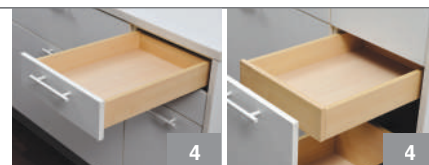

Drawer M

Standard Drawer



Drawer H - Double Railing

Standard Drawer



Drawer H - Single Railing

Standard Drawer
Standard Inner Drawer



Divider Panel



Divider Railing



Assembly, Removal and Adjustment

15

Jigs and Devices


17

TRIOWOOD


Full Extension Drawer Runners




- **T Technology** concealed roller bearing runners
- Full extension
- Load capacity of **30kg**
- **Sylent** integrated cushioning system
- Tool free height adjustment
- Built-in width and depth tolerance compensation

① 	Runner profile Left / Right : galvanised
Nominal Length	
250mm	TW63.25.GI
270mm	TW63.27.GI
300mm	TW63.30.GI
350mm	TW63.35.GI
400mm	TW63.40.GI
450mm	TW63.45.GI
500mm	TW63.50.GI
550mm	TW63.55.GI
600mm	TW63.60.GI
② 	Locking Device Left / Right : Black
	W60.55000.12


Standard Drawer

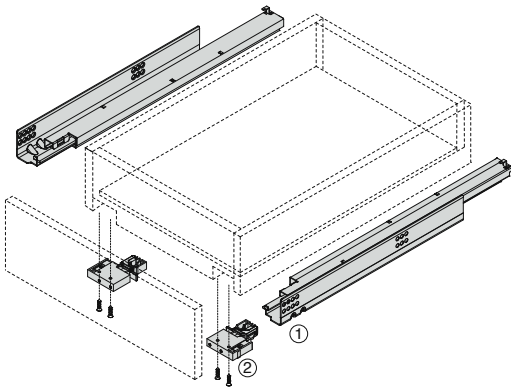


Inner Drawer

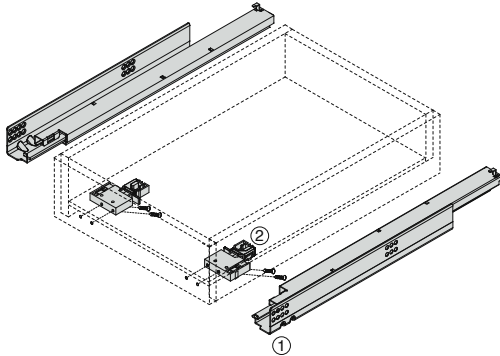

Space Requirement and Drawer/Cabinet Specifications – Standard/Inner Drawer

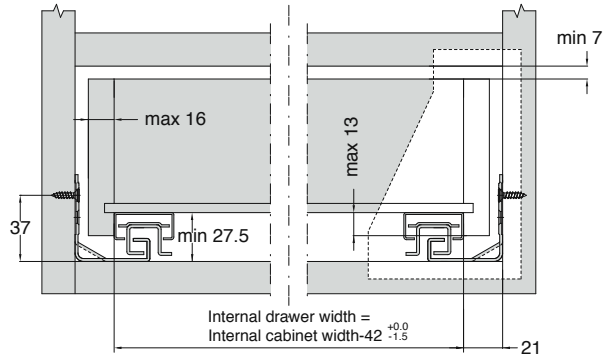


Drawer Specifications – Standard Drawer

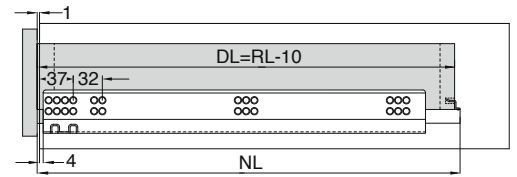

DL = Drawer Length RL = Runner Length

Drawer Specifications – Inner Drawer

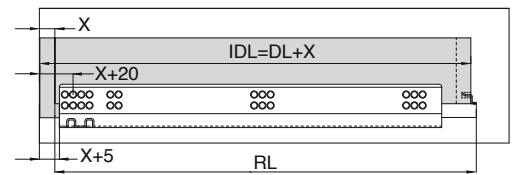


IDL = Inner Drawer Length DL = Drawer Length
RL = Runner Length

Cabinet Profile Screw Positions for Standard Drawer


Runner Length	Min. internal cabinet depth = Runner length + 3mm Actual loss of extension = 0 mm
250, 270 mm	
300 mm	
350 mm	
400 mm	
450 mm	
500 mm	
550 mm	
600 mm	

NOTE : For Inner Drawer, refer to 'Drawer Specifications - Inner Drawer' to calculate screw positions.

Drawer Preparation - Front



Drawer Preparation - Back

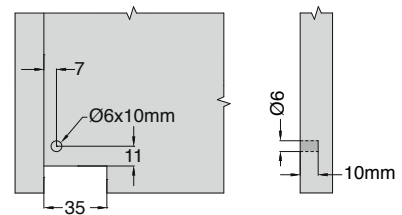


TRIOWOOD



Full Extension Drawer Runners – M Height





- **T Technology** concealed roller bearing runners
- Full extension
- Load capacity of **30kg**
- **Sylent** integrated cushioning system
- Tool free height adjustment
- Built-in width and depth tolerance compensation
- Tool free front tilt adjustment via railing

Standard Drawer

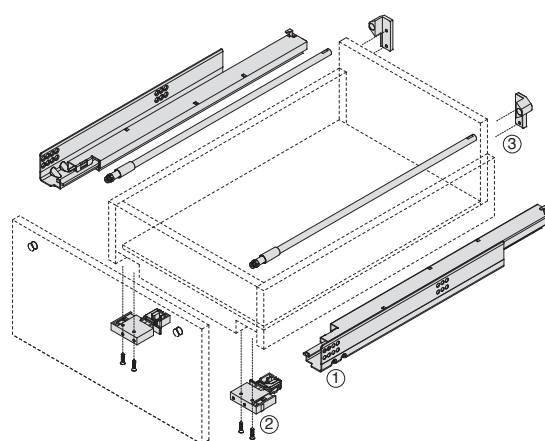

① 	Runner profile Left / Right : galvanised	③ 	Railing Set Left / Right :
Nominal Length		Inclusive of Screw-on and Expansion railing adaptor	
400mm	TW63.40.GI	RRA-NE.368.XX	
450mm	TW63.45.GI	RRA-NE.418.XX	
500mm	TW63.50.GI	RRA-NE.468.XX	
550mm	TW63.55.GI	RRA-NE.518.XX	
600mm	TW63.60.GI	RRA-NE.568.XX	
② 	Locking Device Left / Right : Black		
	W60.55000.12		

Colour Code XX
 Standard : 01 - R9010 White 22 - R9006 Grey Metallic 24 - R7037 Dust Grey
 Available upon request : 21 - R7004 Grey

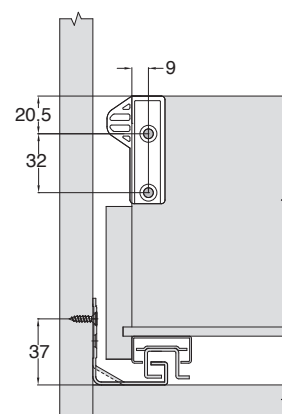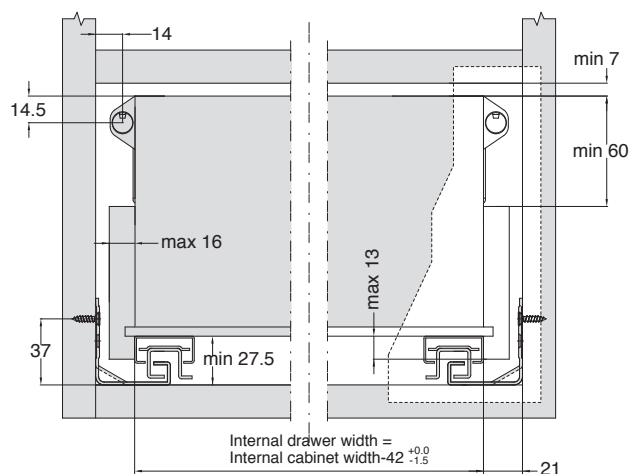

Cabinet Profile Screw Positions for Standard Drawer

Drawer Specifications – Standard Drawer

Runner Length

400 mm



450 mm

500 mm

550 mm


600 mm

Min. internal cabinet depth = Runner length + 3mm
Actual loss of extension = 0 mm

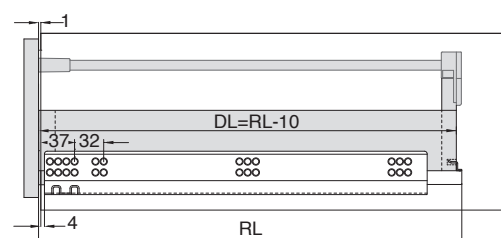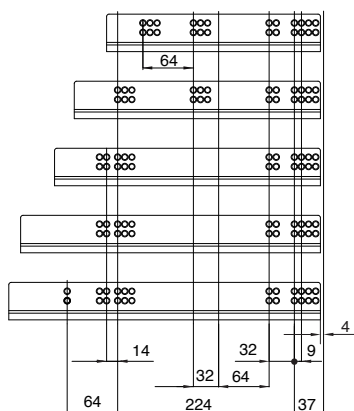


DL= Drawer length RL= Runner length

Drawer Preparation - Front



Drawer Preparation - Back

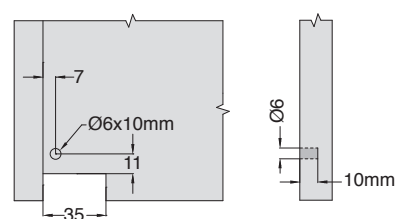


TRIOWOOD



Full Extension Drawer Runners – H Height Double Rail



- **T Technology** concealed roller bearing runners
- Full extension
- Load capacity of **30kg**
- **Sylent** integrated cushioning system
- Tool free height adjustment
- Built-in width and depth tolerance compensation
- Tool free front tilt adjustment via railing



Standard Drawer

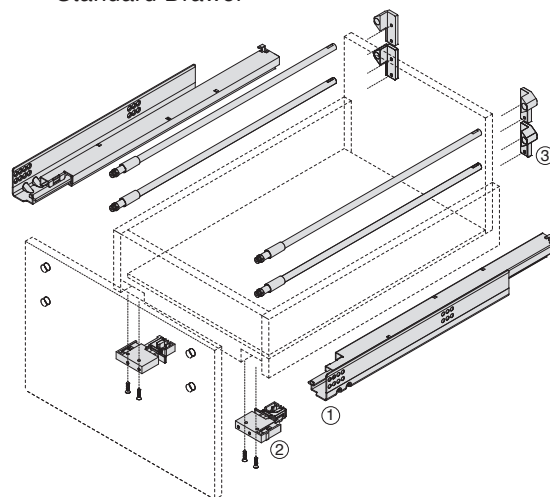

① 	Runner profile Left / Right : galvanised	③ 	Railing Set Left / Right :
Nominal Length		Inclusive of Screw-on and Expansion railing adaptor	
400mm	TW63.40.GI	2X RRA-NE.368.XX	
450mm	TW63.45.GI	2X RRA-NE.418.XX	
500mm	TW63.50.GI	2X RRA-NE.468.XX	
550mm	TW63.55.GI	2X RRA-NE.518.XX	
600mm	TW63.60.GI	2X RRA-NE.568.XX	
② 	Locking Device Left / Right : Black		
	W60.55000.12		

Colour Code XX
Standard : 01 - R9010 White 22 - R9006 Grey Metallic 24 - R7037 Dust Grey
Available upon request : 21 - R7004 Grey

Space Requirement and Drawer/Cabinet Specifications – Standard

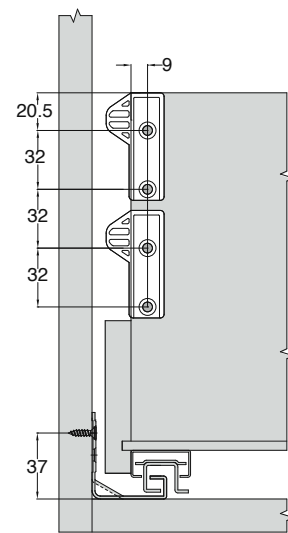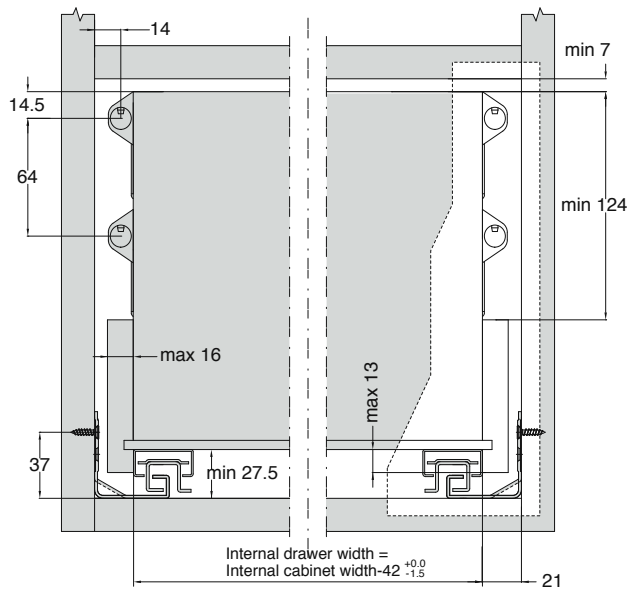

Cabinet Profile Screw Positions for Standard Drawer

Runner Length

400 mm



450 mm

500 mm

550 mm


600 mm

Min. internal cabinet depth = Runner length + 3mm
Actual loss of extension = 0 mm

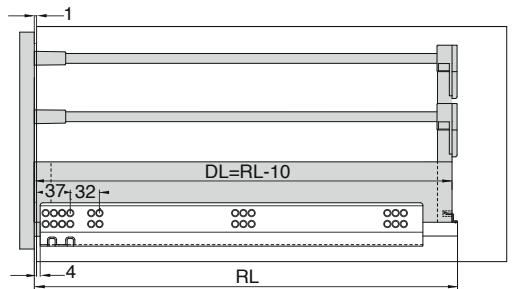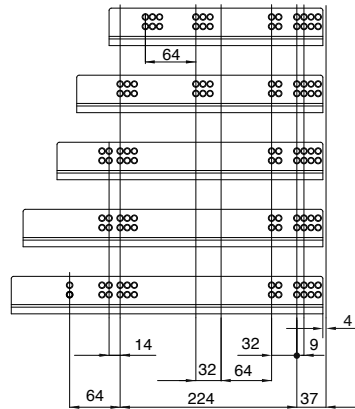


DL= Drawer length RL= Runner length

Drawer Preparation - Front



Drawer Preparation - Back

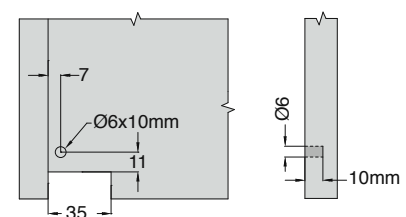


TRIOWOOD

Full Extension Drawer Runners – H Height






- **T Technology** concealed roller bearing runners
- Full extension
- Load capacity of **30kg**
- **Sylent** integrated cushioning system
- Tool free height adjustment
- Built-in width and depth tolerance compensation
- Tool free front tilt adjustment via railing

Standard Drawer

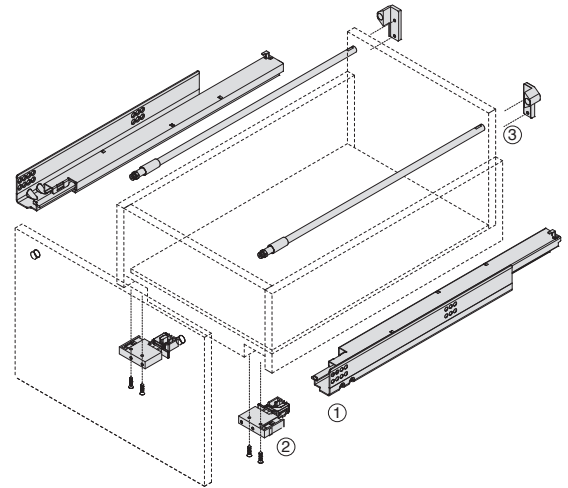



Inner Drawer

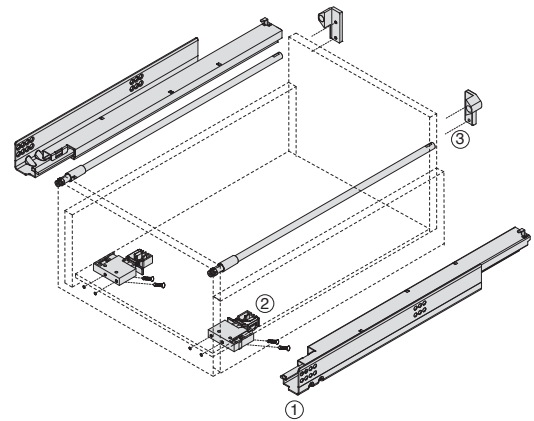

	Runner profile Left / Right : galvanised		Railing Set Left / Right :
Nominal Length		Inclusive of Screw-on and Expansion railing adaptor	
400mm	TW63.40.GI	RRA-NE.368.XX	
450mm	TW63.45.GI	RRA-NE.418.XX	
500mm	TW63.50.GI	RRA-NE.468.XX	
550mm	TW63.55.GI	RRA-NE.518.XX	
600mm	TW63.60.GI	RRA-NE.568.XX	
	Locking Device Left / Right : Black		
	W60.55000.12		

Colour Code XX
Standard : 01 - R9010 White 22 - R9006 Grey Metallic 24 - R7037 Dust Grey
Available upon request : 21 - R7004 Grey

Space Requirement and Drawer/Cabinet Specifications – Standard/Inner Drawer

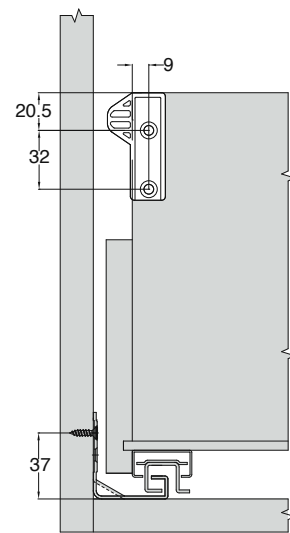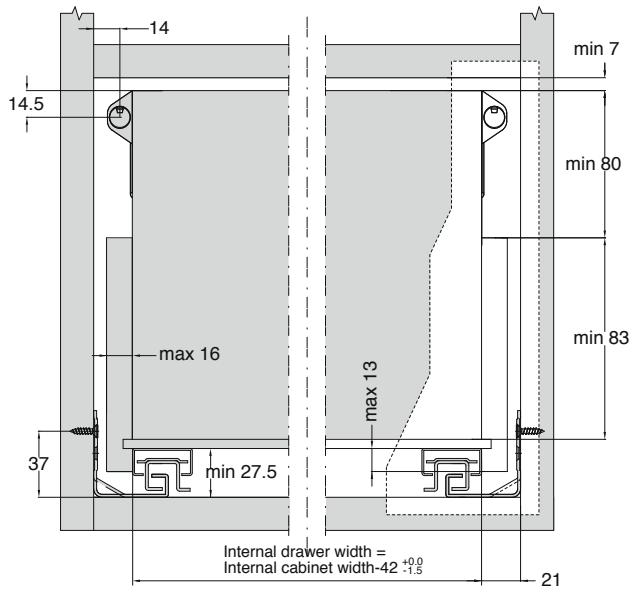

Cabinet Profile Screw Positions for Standard Drawer

Runner Length

400 mm


450 mm

500 mm


550 mm

600 mm

Min. internal cabinet depth = Runner length + 3mm
Actual loss of extension = 0 mm

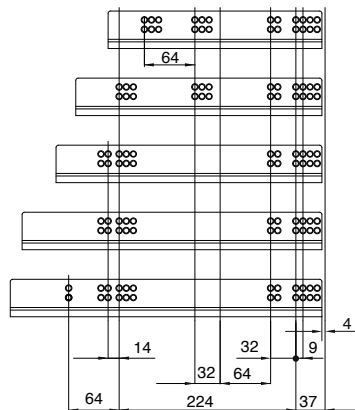


NOTE : For Inner Drawer, refer to 'Drawer Specifications - Inner Drawer' to calculate screw positions.

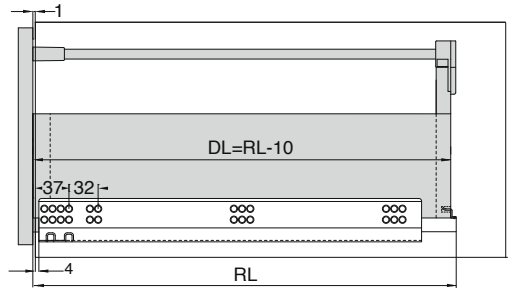

DL= Drawer length

RL= Runner length

Drawer Specifications – Inner Drawer

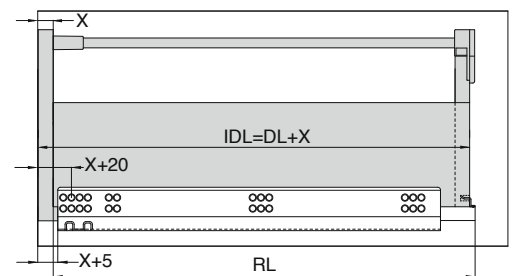


IDL= Inner drawer length


DL= Drawer length

RL = Runner length

Drawer Preparation - Front



Drawer Preparation - Back

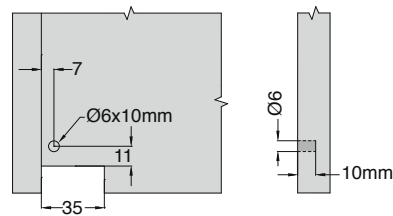


TRIOWOOD

Divider Panel




- **T Technology** concealed roller bearing runners
- Full extension
- Load capacity of **30kg**
- **Sylent** integrated cushioning system
- Tool free height adjustment
- Built-in width and depth tolerance compensation
- Tool free front tilt adjustment via railing

Standard Drawer

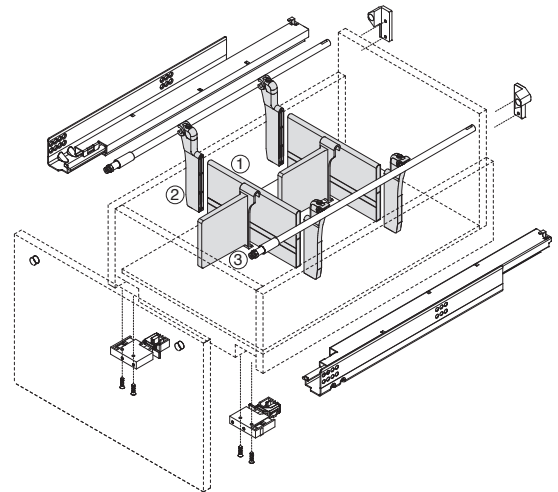


①		Divider Panel	②		Divider Panel Connector Left / Right :	③		Lateral Divider
Cabinet Width (16mm side panel)			RPC.6100N.XX			RLD.6600.XX		
400mm		RPD.284.XX						
450mm		RPD.334.XX						
500mm		RPD.384.XX						
550mm		RPD.434.XX						
600mm		RPD.484.XX						
900mm		RPD.784.XX						
1000mm		RPD.884.XX						
Length for cutting		RPD.1078.XX						

Cutting Dimensions for Divider Panel



Space Requirement



Colour Code XX
 Standard : 01 - R9010 White 22 - R9006 Grey Metallic 24 - R7037 Dust Grey
 Available upon request : 21 - R7004 Grey

TRIOWOOD


Divider Railing



triowood


- **T Technology** concealed roller bearing runners
- Full extension
- Load capacity of **30kg**
- **Sylent** integrated cushioning system
- Tool free height adjustment
- Built-in width and depth tolerance compensation
- Tool free front tilt adjustment via railing

Standard Drawer

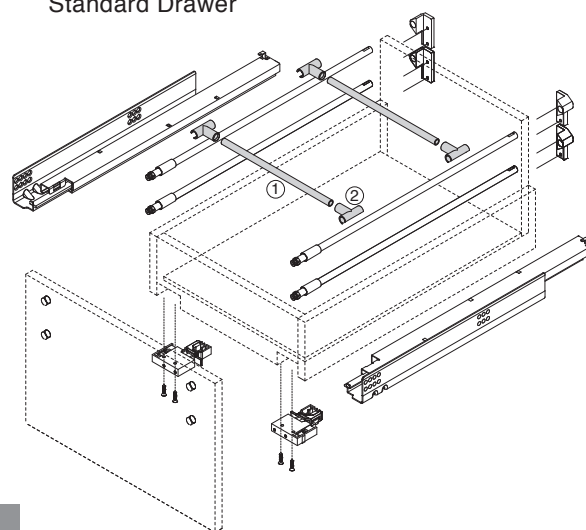

①	Cross Railing	②	Cross Railing Connector
			
Cabinet Width (16mm side panel)		2X for each Cross Railing	RRC.7200.XX
400mm	RRF.315.XX		
450mm	RRF.365.XX		
500mm	RRF.415.XX		
550mm	RRF.465.XX		
600mm	RRF.515.XX		
900mm	RRF.815.XX		
1000mm	RRF.915.XX		
Length for cutting	RRF.1109.XX		

Cutting Dimensions for Cross Railing




Colour Code XX
 Standard : 01 - R9010 White 22 - R9006 Grey Metallic 24 - R7037 Dust Grey
 Available upon request : 21 - R7004 Grey


Fixing onto cabinet

A Chipboard Screws
Ø4 x 15


B Euro Screws
Article No. 360.145

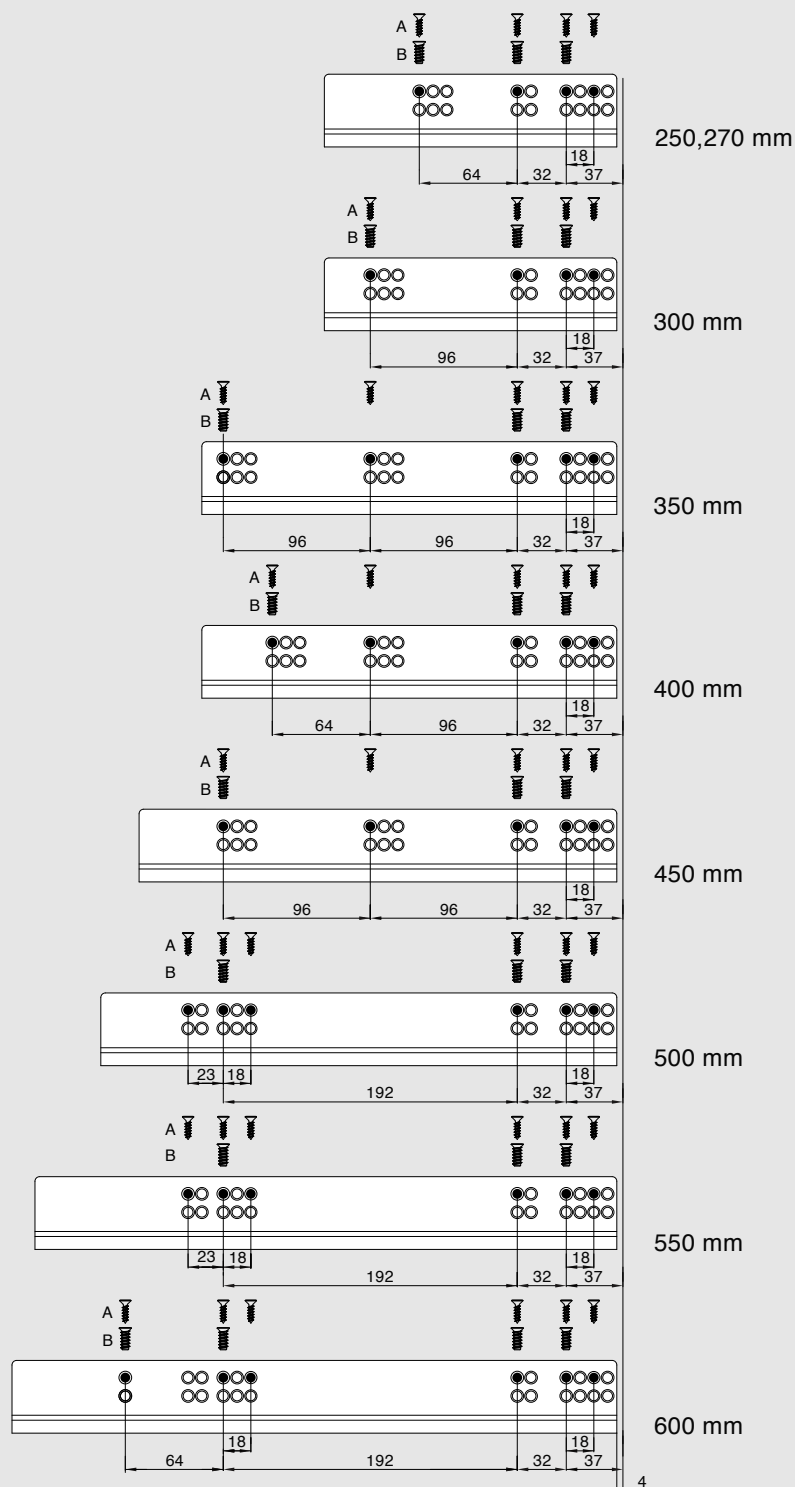


Locking Device



Four side drawer




Three side drawer




Inner Drawer

Height Adjustment







Railing Assembly

Screw-on




Expansion




TRIOWOOD

Assembly, Removal and Adjustment


Drawer Insertion

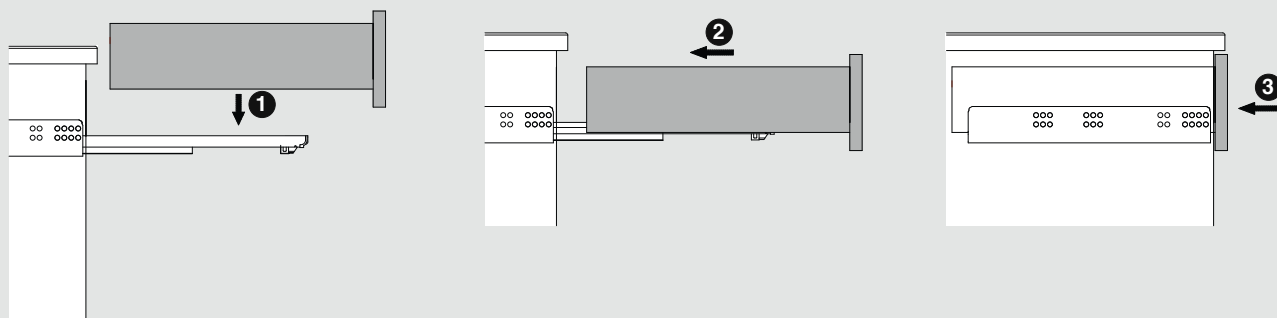


Drawer Removal

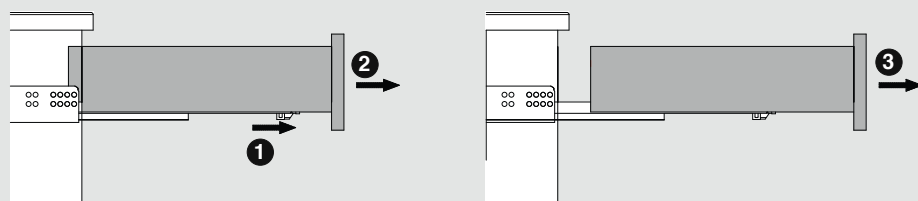


Divider Panel and Lateral Divider Assembly

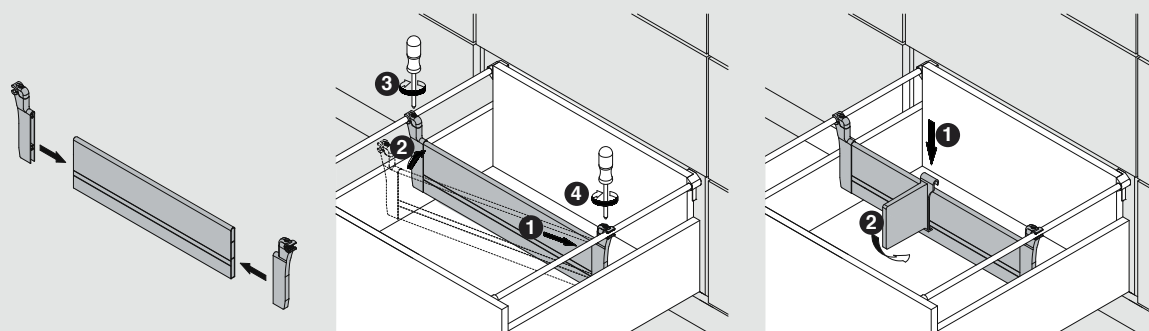


Divider Railing

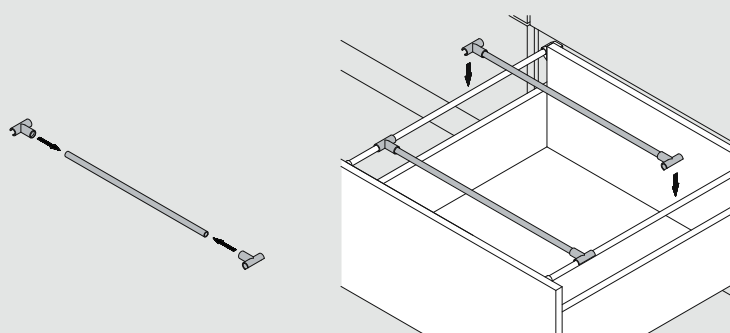

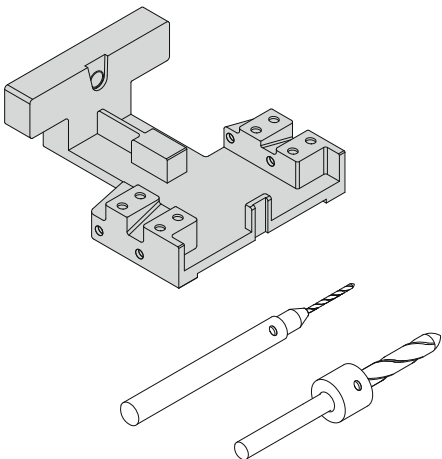


Application

Rear fixing holes

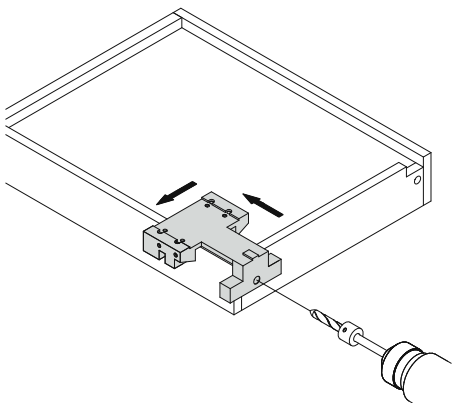

Pilot holes for locking device

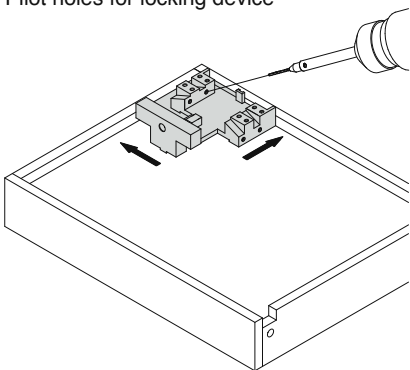

Aksesori Setia Sdn.Bhd.

Company No. 326521-U

Plot 32, Lengkok Rishah 1,
Kawasan Perindustrian Silibin,
30100 Ipoh, Perak, Malaysia.

Tel : (60) 5 - 527 6055

Fax : (60) 5 - 527 6063

E-mail : info@harn.com

www.harn.com

harn[®]